

2130 Ford Explorer 2011-Present

## Installation Instructions



**60 Minutes** 

NOTE : Before starting this installation make sure all the hardware is included and this part number matches your vehicle

REV 3

850-AB-NS


## FORD EXPLORER 2011- PRESENT






HTC 269;M10





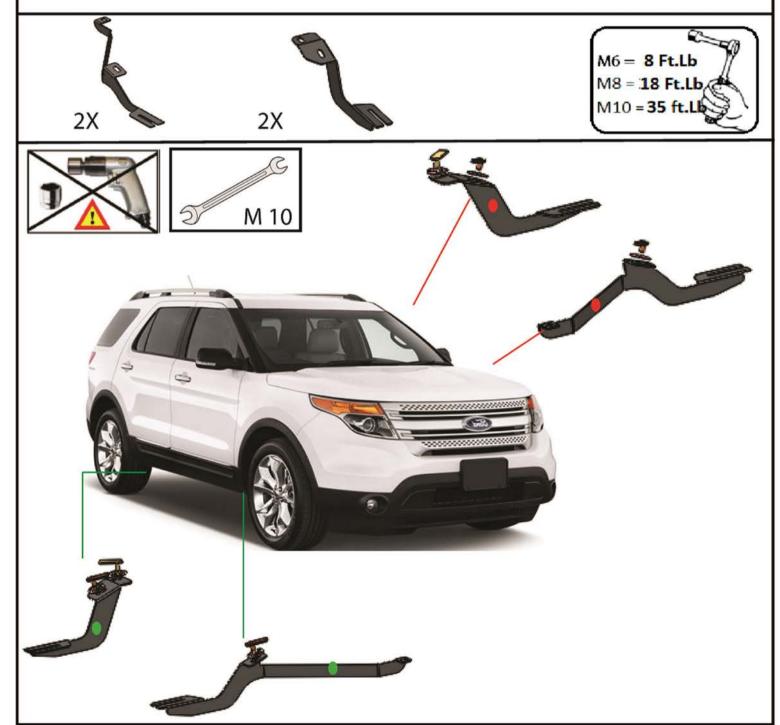


ATTENTION PLEASE! DO NOT TIGHTEN ALL OF THE SCREWS UNTIL ALL OF THE PARTS ARE INSTALLED

Keep your Romik accesories clean. To prevent corrosion and to mantain your high quality finish, wax or polish regulary with quality stainless polish. Use a non abrasive type automotive wax. Any use of abrasive soaps, polishes or waxes can be detrimental to the finish



- 1) Locate front mounting point and shown below image #1 and remove factory bolt. (this is reused)
- 2) Locate second mounting point and insert HTC 232
- 3) Proceed to install front bracket with supplied hardware.
- 4) Do not tighten anything yet, brackets must be lose in order to install running boards.



## WARNING: Use of powertools will void warranty










- 1) Locate rear mounting area as shown below.
- 2) Proceed to install supplied inserts HTC 232 and HTC 230
- 3) Proceed to install rear brackets
- 4) Do not tighten anything yet
- 5) Install running boards, hand tighten hardware.









- 1) After installing both front and rear brackets lose and running boards hand tighten proceed to torque hardware
- 2) Torque hardware M10 to 35 Ft.Lb
- 3) Proceed to torque running boards hardware M8 to 18 Ft.Lb

WARNING: Use of powertools will void warranty

