



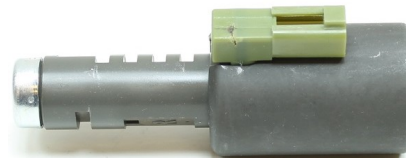

AW-6 Linear Solenoid


TF-80 (AF40) and TF-81 (AF21) Series

52-0483
(Black)

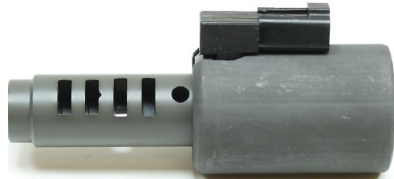

52-0484
(Green)



52-0485
(Blue)

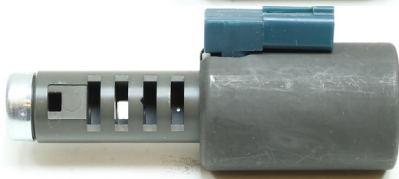

52-0486
(Brown)

TF-80 (AF40)

TF-81 (AF21)

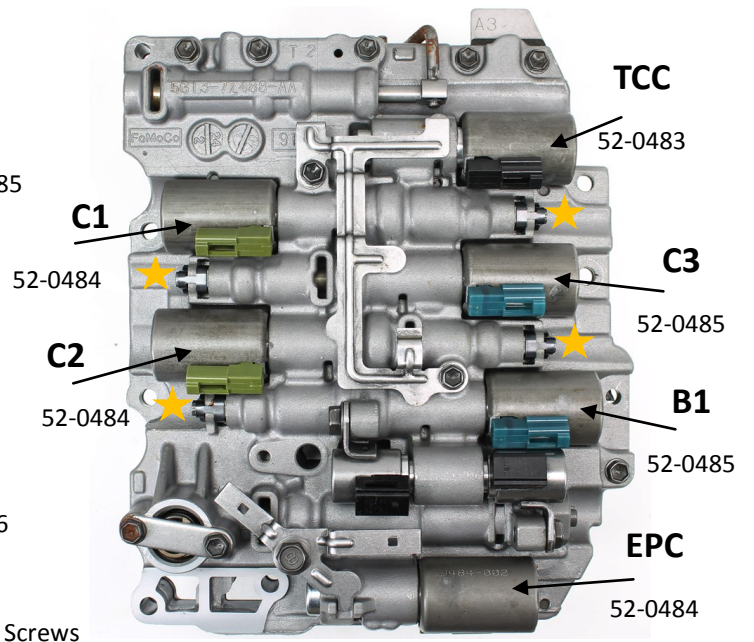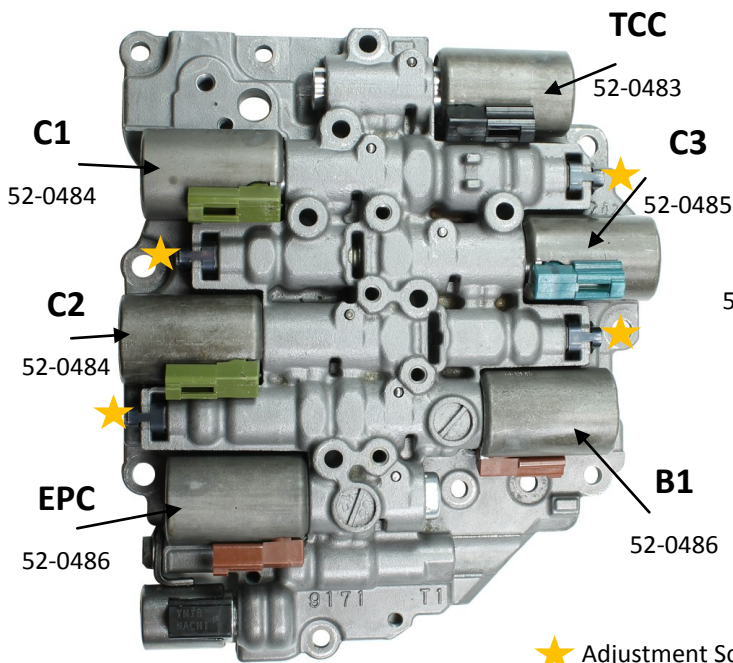

★ Adjustment Screws

		TCC	EPC	B1	C1	C2	C3
TF80	Part Number	52-0483	52-0486	52-0486	52-0484	52-0484	52-0485
	Clocking	2:00	11:00	11:00	10:00	10:00	2:00
	Color	Black	Brown	Brown	Green	Green	Blue
TF81	Part Number	52-0483	52-0484	52-0485	52-0484	52-0484	52-0485
	Clocking	2:00	10:00	2:00	10:00	10:00	2:00
	Color	Black	Green	Blue	Green	Green	Blue



AW-6 Linear Solenoid

General note:

To ensure proper vehicle operation special attention must be paid to key wears areas within valve body. If worn they must be repaired before installation of the Rostra solenoids.

All Rostra solenoids have been pre-calibrated and tested to match the nominal Original Equipment calibration of a properly functioning valve body. Due to variations in valve body wear and computer shift adapt strategies, solenoids adjustment may be required.

Adjustment Instructions:

Use the chart below to resolve drivability issues. Turn the adjustment screw on the valve body that shares the bore with the solenoid that corresponds with the symptoms listed on the chart. For example, turning the C3 adjustment screw counter-clockwise would fix a 2-3 flare. For faint symptoms turn the screw 1/2 rotation. For intense symptoms turn the screw 2 complete rotations. After every adjustment perform the suggested relearn procedure.

Component	Turn Screw Clockwise (Decrease Pressure)	Turn Screw Counter-Clockwise (Increase Pressure)
B1	<ul style="list-style-type: none">• 1-2 Bind-up• 5-6 Bind-up• 3-2 Bump	<ul style="list-style-type: none">• 1-2 Flare• 5-6 Flare• 3-2 Flare
K1	<ul style="list-style-type: none">• Quick Harsh Drive Engagement• 5-4 Bump	<ul style="list-style-type: none">• Delayed Harsh Drive Engagement• 5-4 Flare
K2	<ul style="list-style-type: none">• 3-4 Bind-up	<ul style="list-style-type: none">• 3-4 Flare
K3	<ul style="list-style-type: none">• Quick Harsh Reverse Engagement• 2-3 Bind-up• 4-5 Bind-up• 4-3 Bump• 6-5 Bump	<ul style="list-style-type: none">• Delayed Harsh Reverse Engagement• 2-3 Flare• 4-5 Flare• 4-3 Flare• 6-5 Flare

Relearn Procedure:

1. 5 Garage Shifts (PRNDL) remaining in each gear for 5 seconds.
2. 5 Light 1-4 shifts at 10% throttle under 30 MPH coming to a stop between trials.
3. 5 Medium 1-6 Shifts at 50% throttle coming to a stop between trials.
4. 5 Manual 6-1 Downshifts.