

Windshield Channel (1997 - 2002) Jeep Wrangler (TJ) - Drilling Required

Contents:

- (1) Left Windshield Channel
- (1) Right Windshield Channel
- (10) #8 x 1/2" Self Tapping Screws
Phillips Head

NOTE: This header is a drill and install application.
The Following tools will be needed for
installation.

- (1) 1/8" drill bit
- (1) Electric Drill
- (1) Center Punch
- (1) Phillips Head Screwdriver

1. Please read instructions fully prior to installing this header. It is important that the header be installed correctly as to not impede the safe operation of the vehicle.

- 2. Locate the left and right windshield channels supplied in this kit. Place them with the open channel up. NOTE that the outside corners of channels are rounded to accommodate the side sports bars.
- 3. Using this as a guide place the channels along the inside-top of the windshield. The rectangular ends of each channel MUST butt up to each other to form an opening around the center footman loop.
- 4. When properly positioned the channels will rest inside of sports bars and also clear soft top header latches.
- 5. Mark the location of the five mounting holes on each channel. Use the center punch to make a slight indentation. Do Not Use Excessive Force.
- 6. Drill a 1/8" hole for each marked location. Install channels using supplied phillips head screws.




Left Side Channel



Right Side Channel



Center Footman Loop

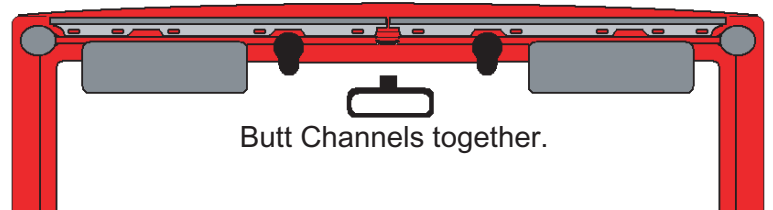

Butt Channels together.