


Freedom SuperClamp 4




Assembly Instructions

4 Bike

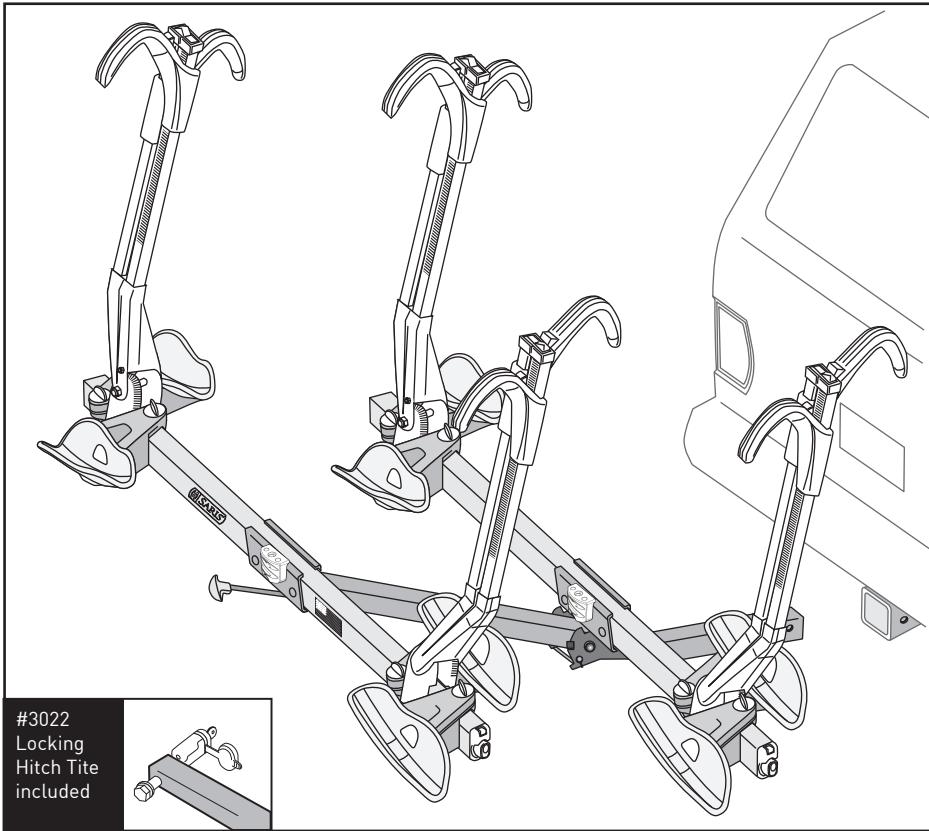

#3022
Locking
Hitch Tite
included


Tools Needed:



Items Included

 x 4
M10 x 60


 x 4
M10

 x 1
8mm

 x 4

Optional Accessories

#4419 Fat Wheel Trays




4026




MAX= 2 Bikes @ 60 lb,
2 Bikes @ 35 lb

4 bike configuration: max load is 2 bikes at
60 lbs each and 2 bikes at 35 lbs each.




63lb / 28.6kg






1

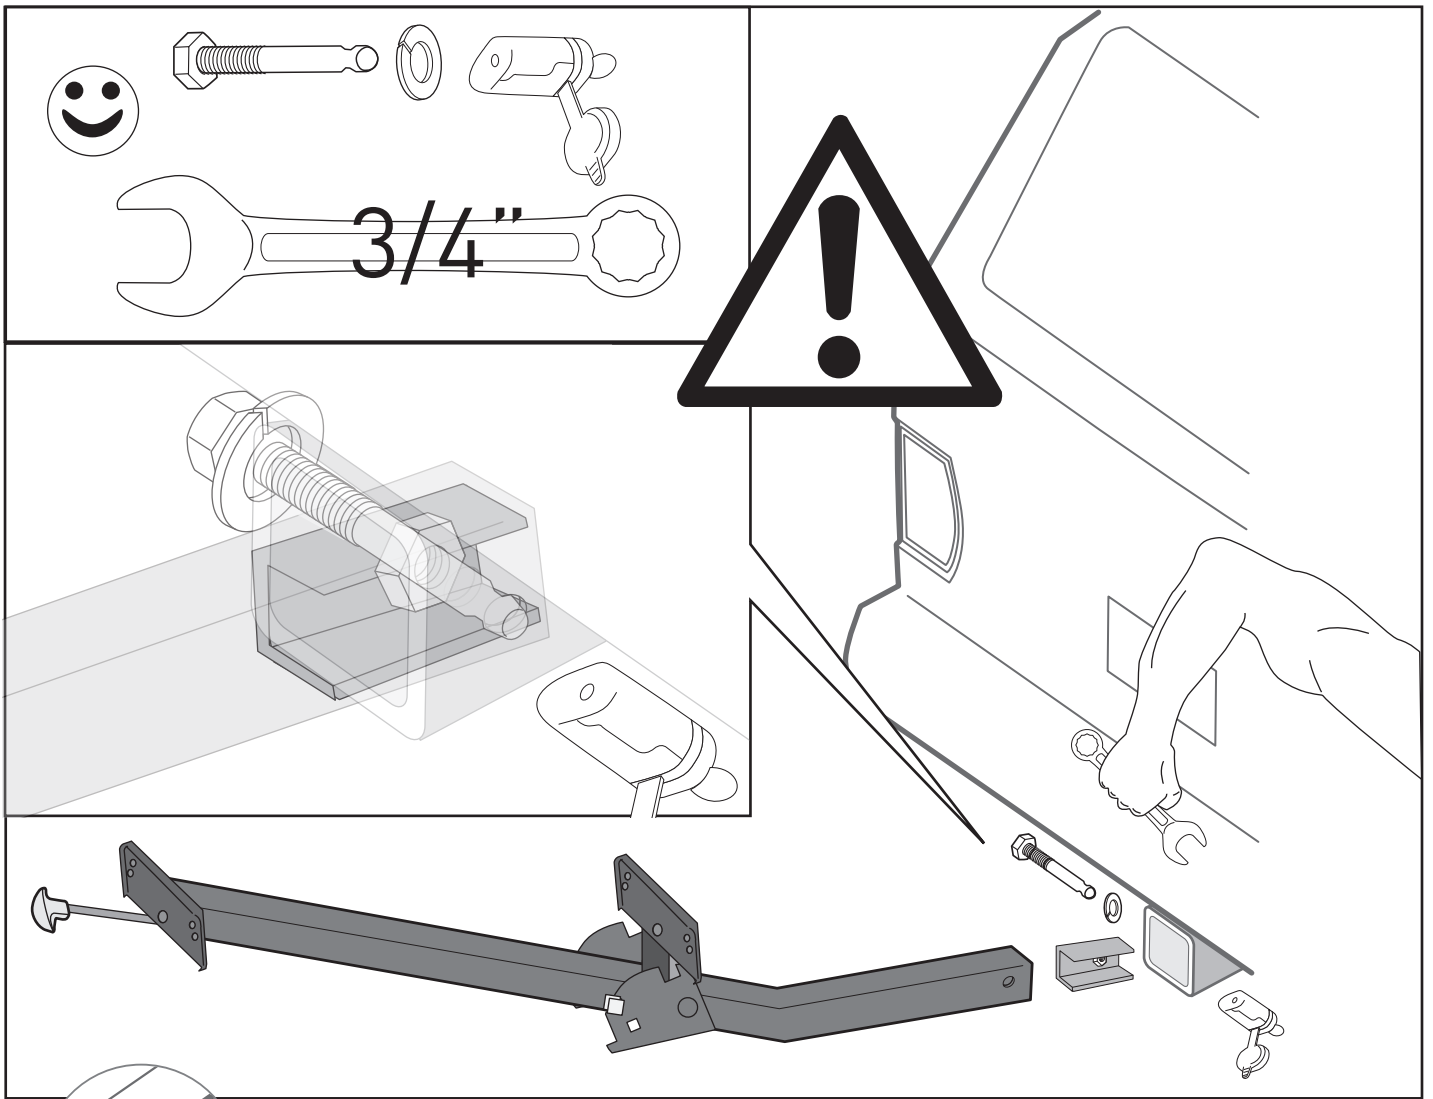


2

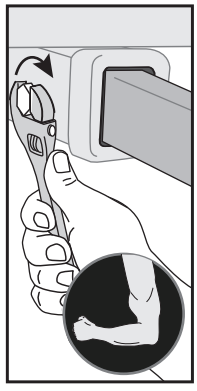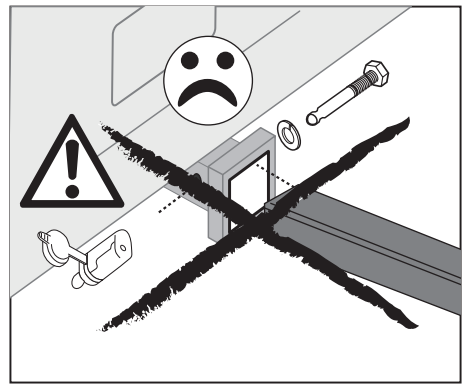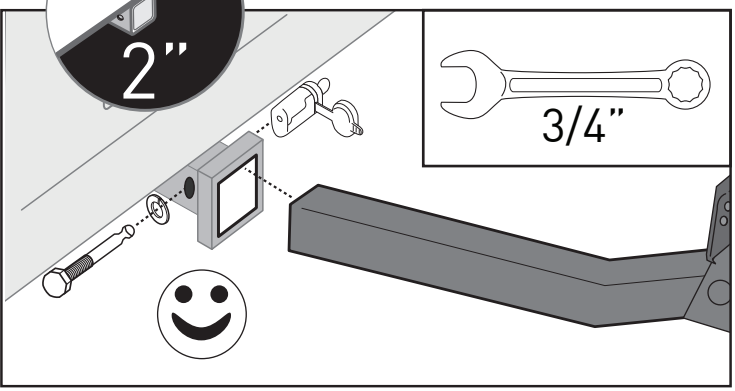



3

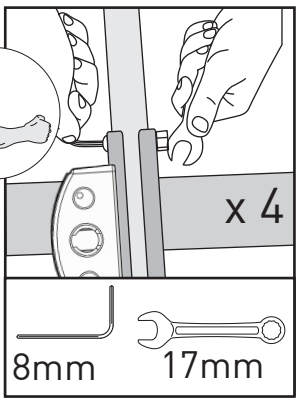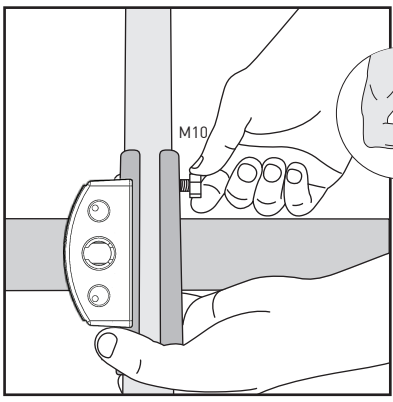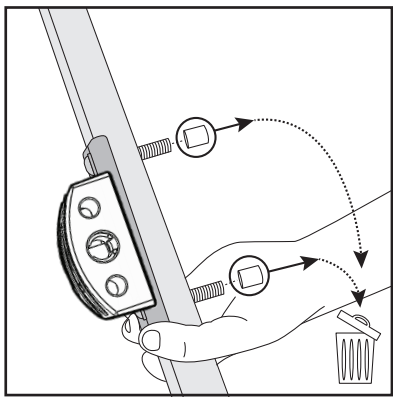



4

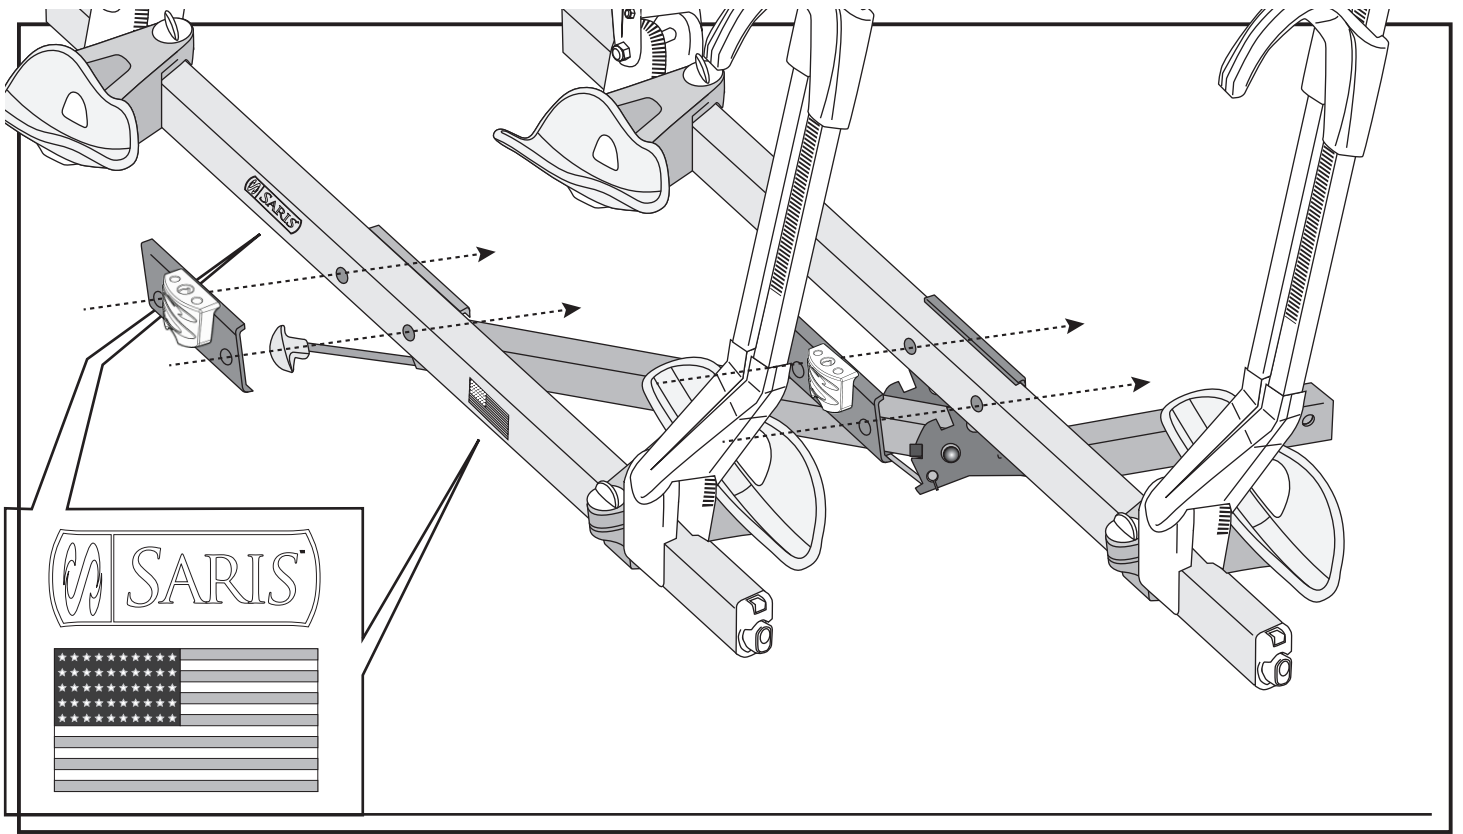



5

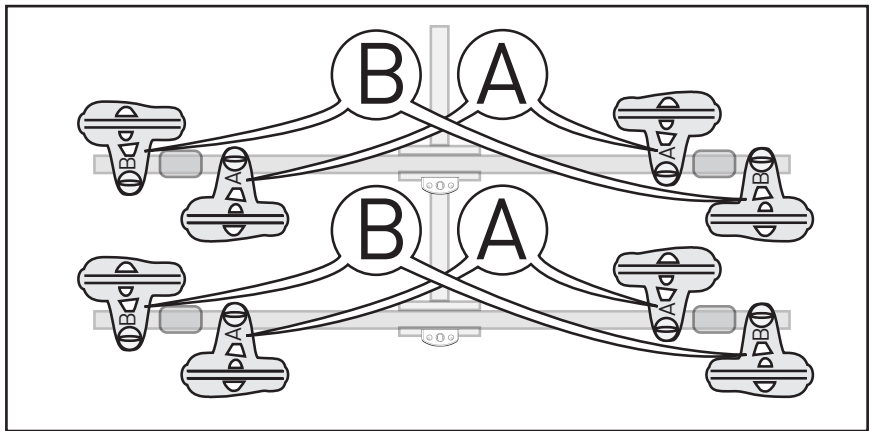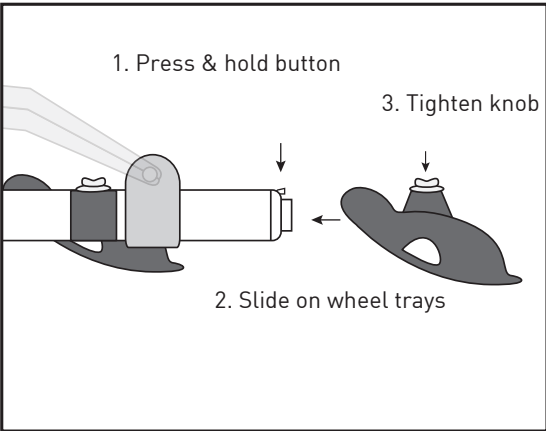


6

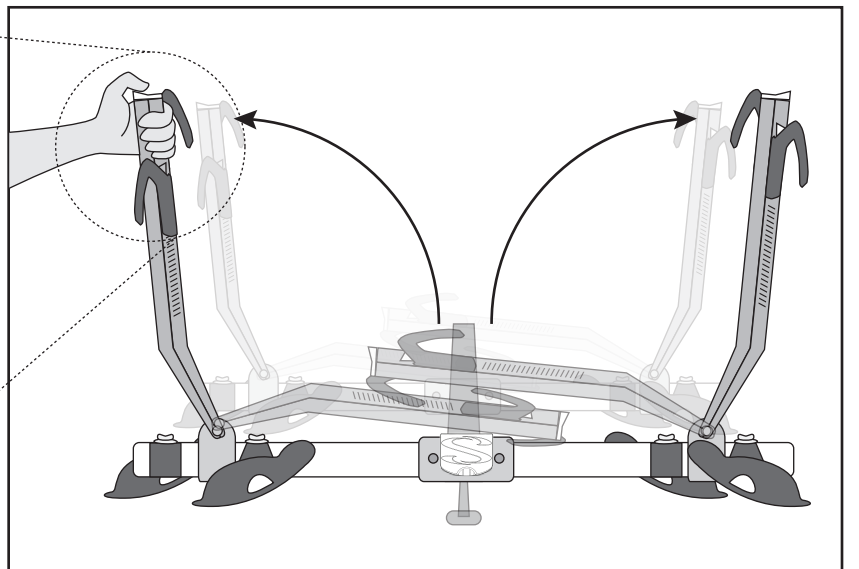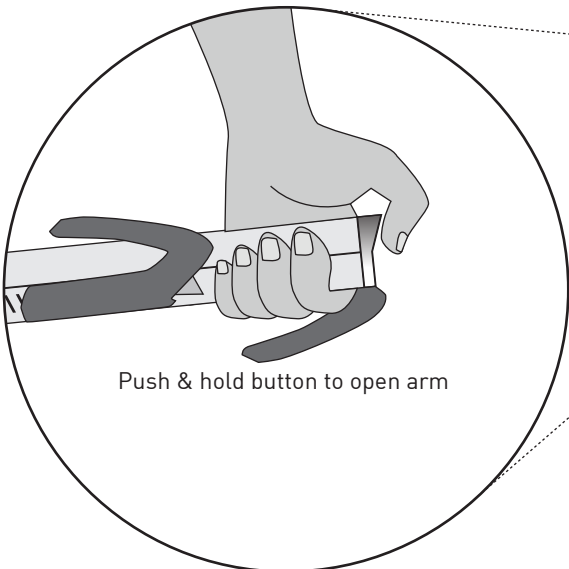

7


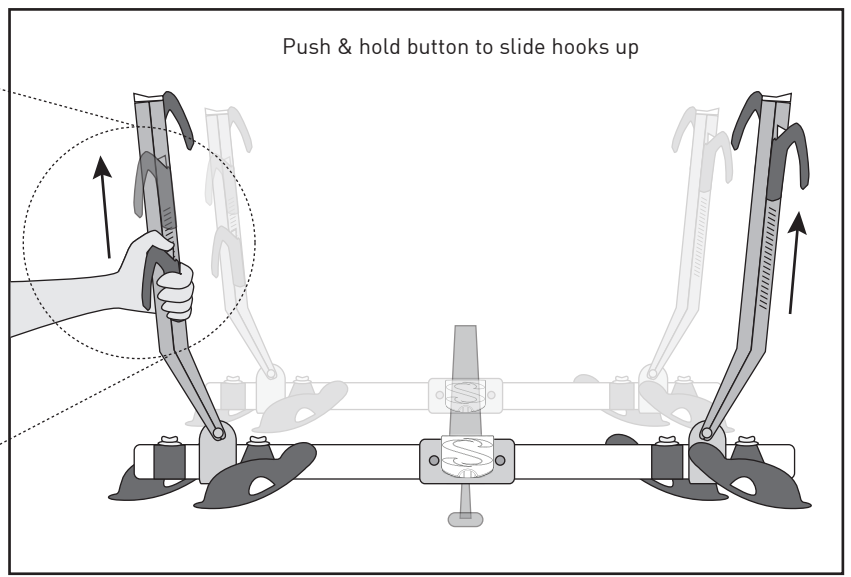
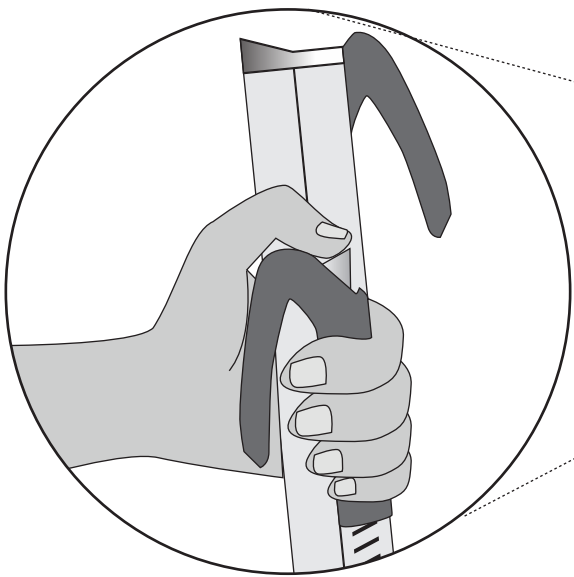


8

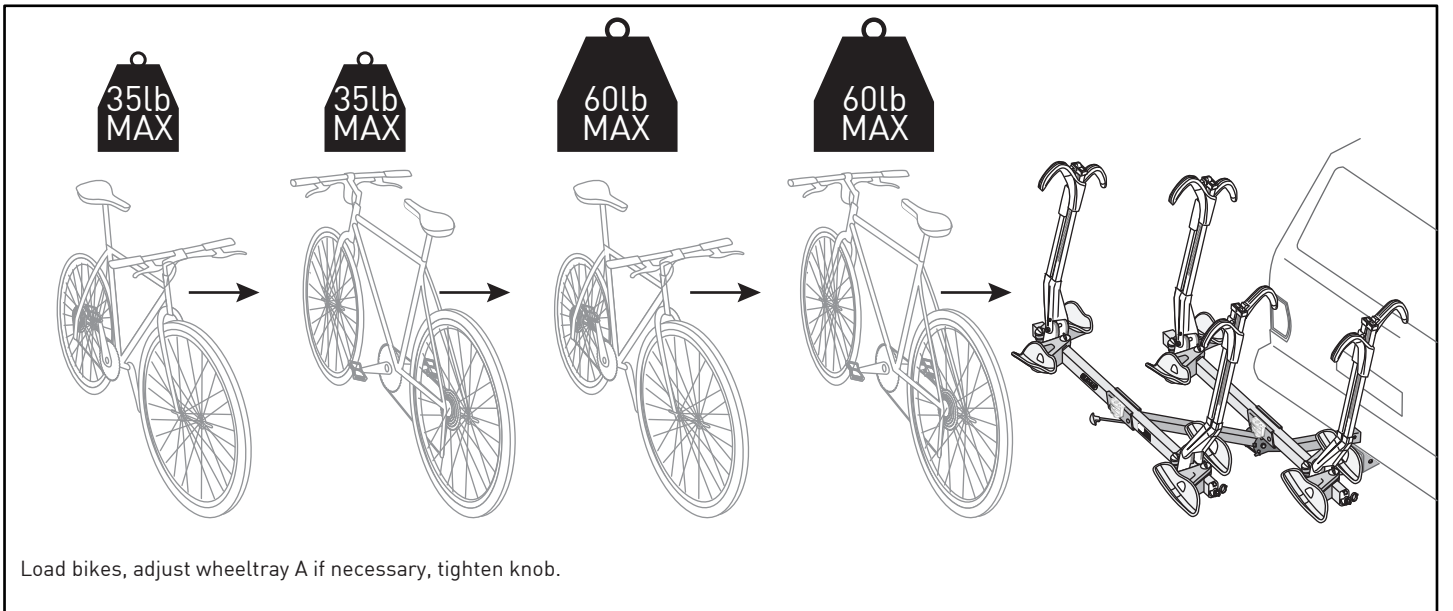

9




Position the arms at "10:00" and "2:00" without contacting bike frame or components.

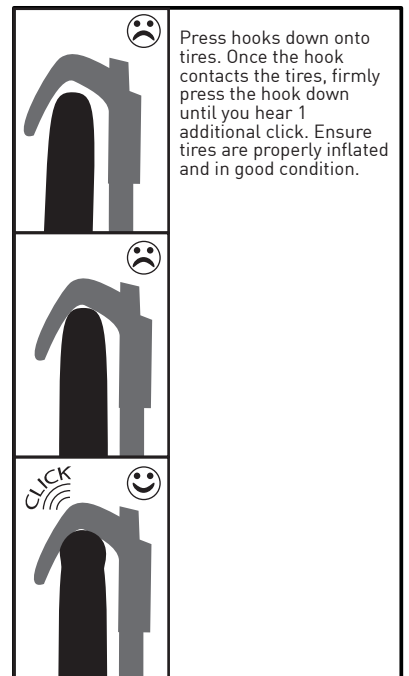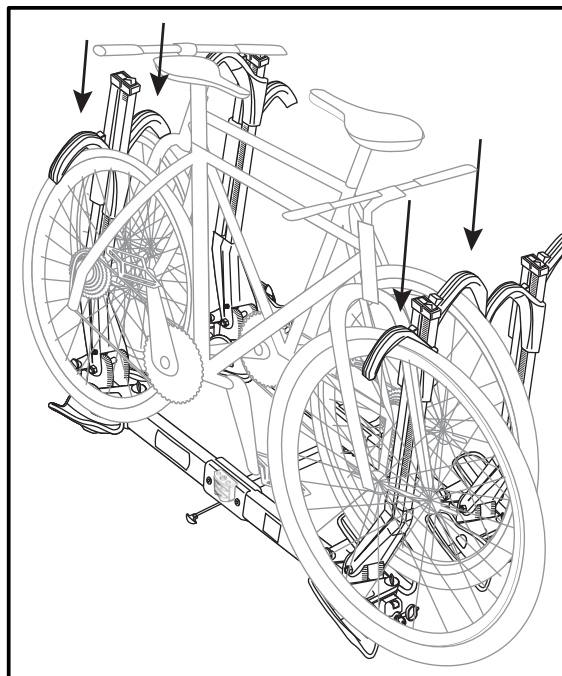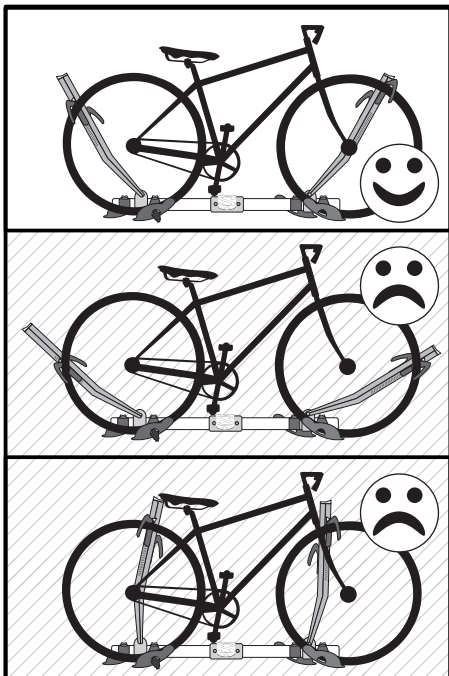





Press hooks down onto tires. Once the hook contacts the tires, firmly press the hook down until you hear 1 additional click. Ensure tires are properly inflated and in good condition.

10

For rear fender or kids bikes, wheel straps can be used in the "A" wheel trays when clamp does not reach.

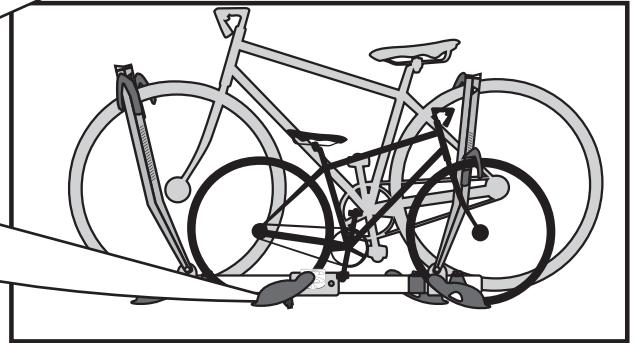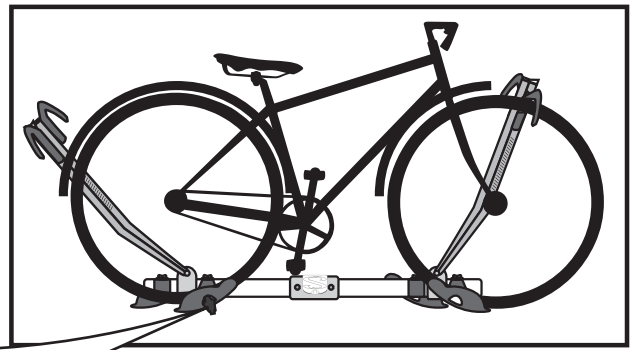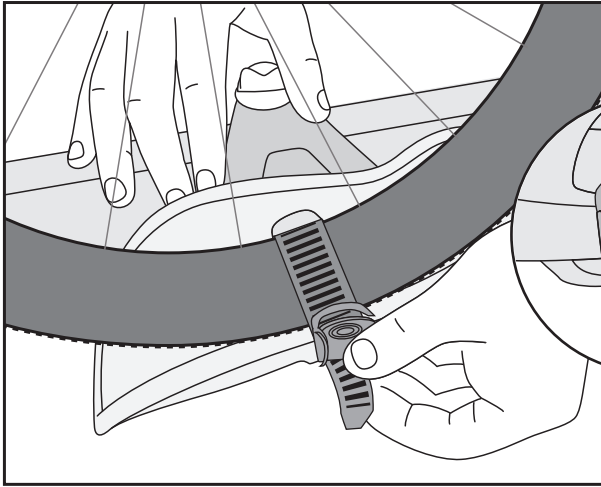




11

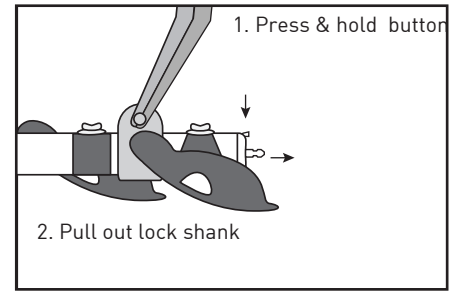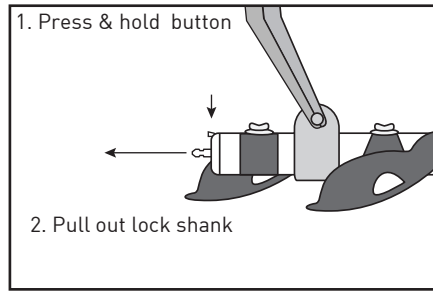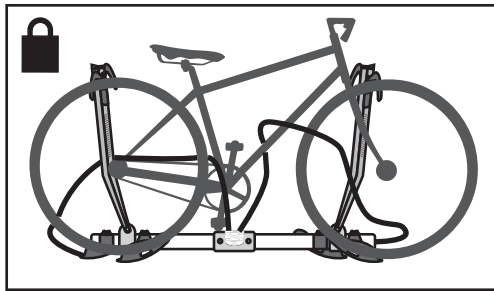



Ensure all knobs are tight and secure. Re-check throughout your journey.

12



To remove bike(s)

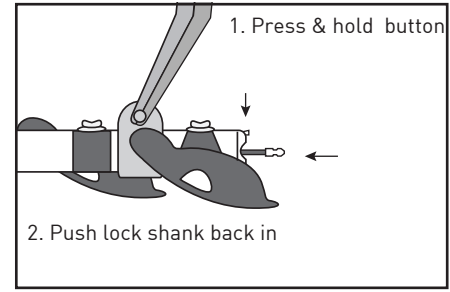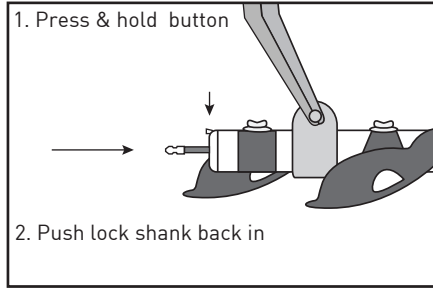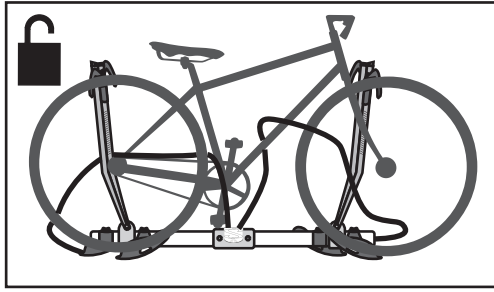

13


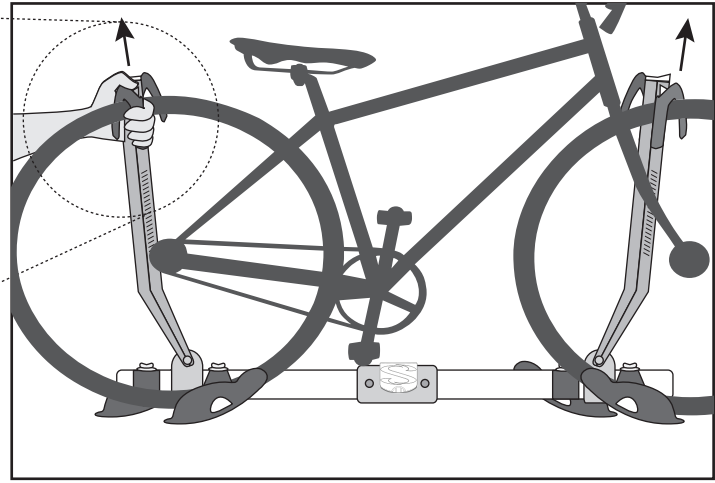
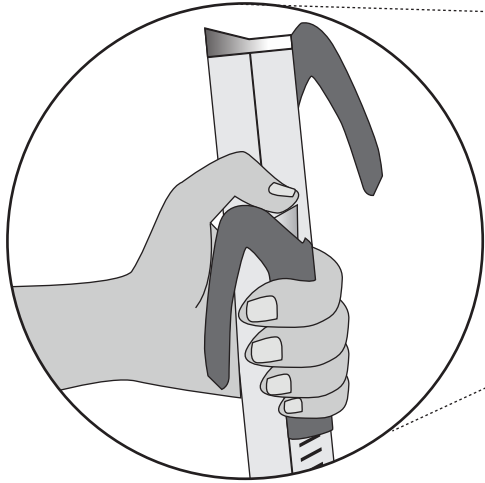


14

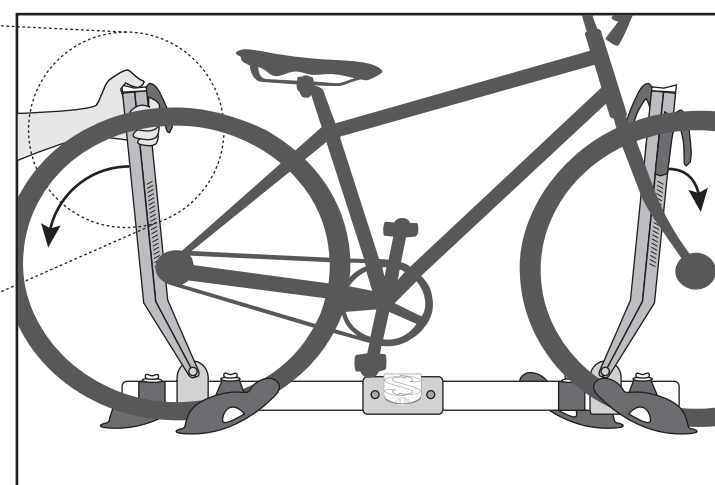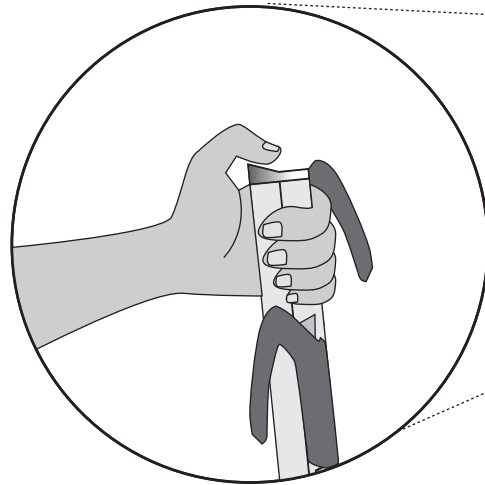


15



Remove Pin to Tilt

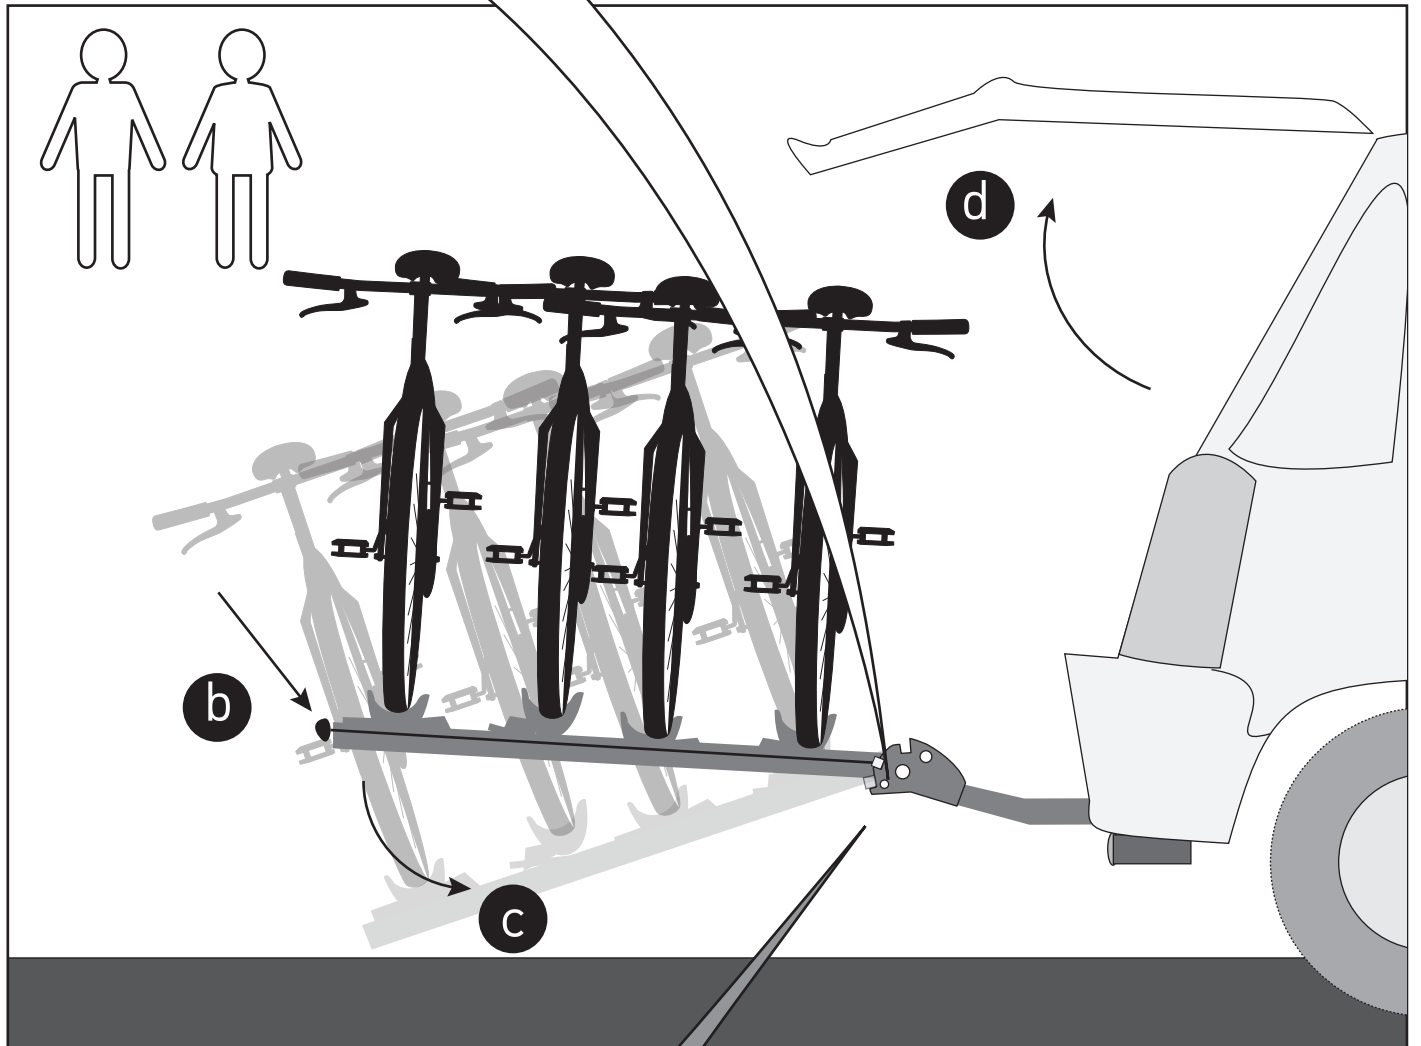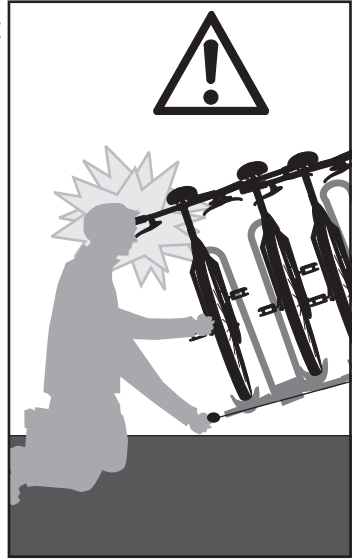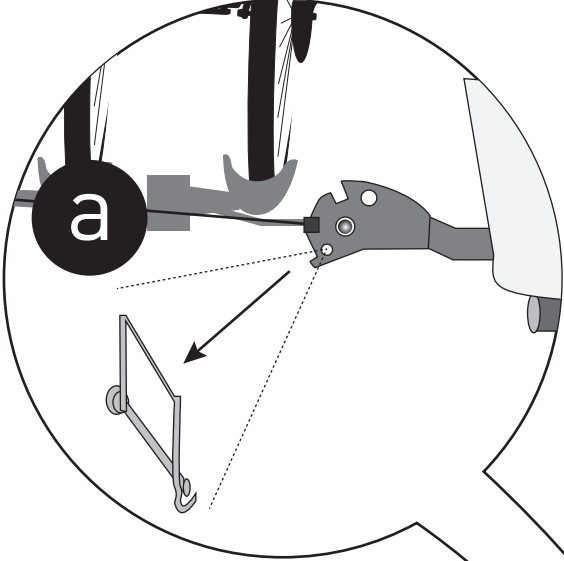

16


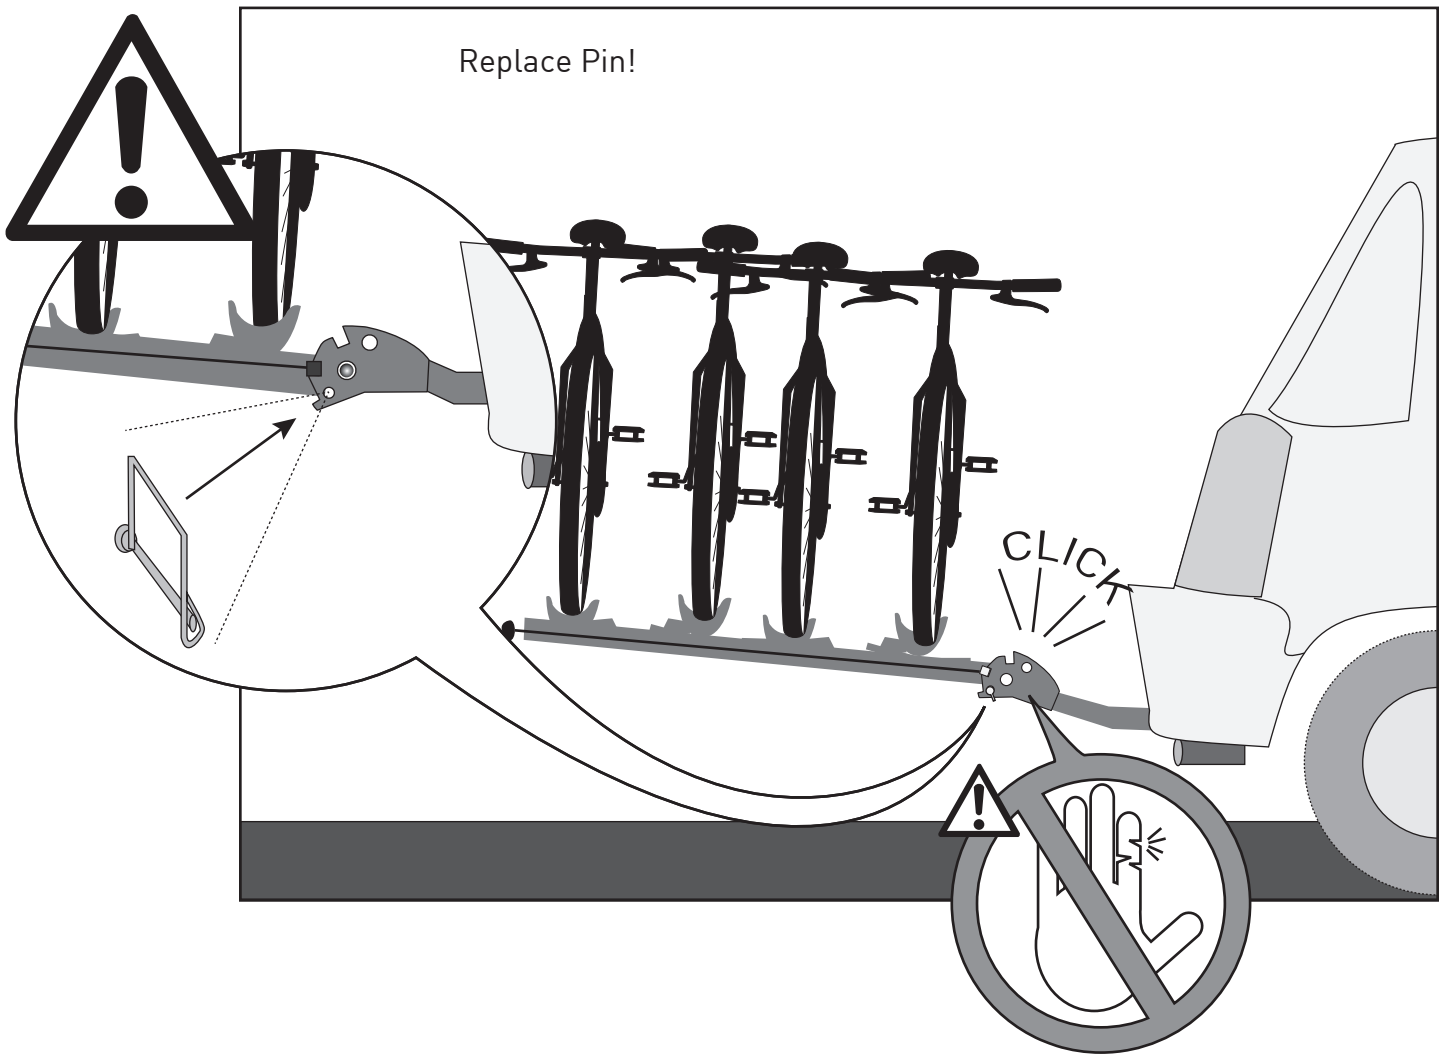


17

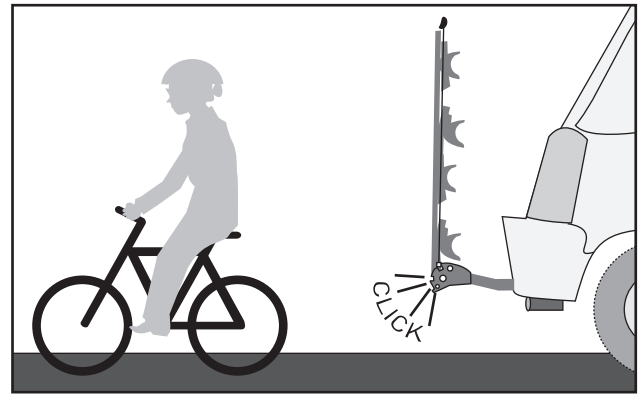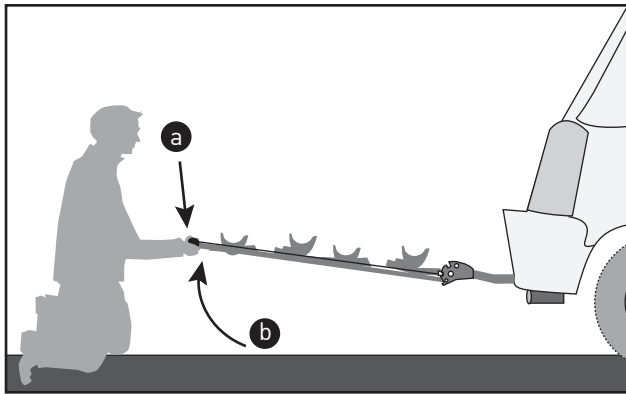

Do not place bike tires directly behind exhaust.

18

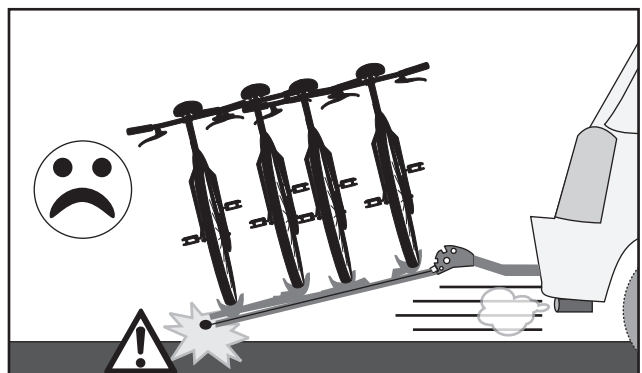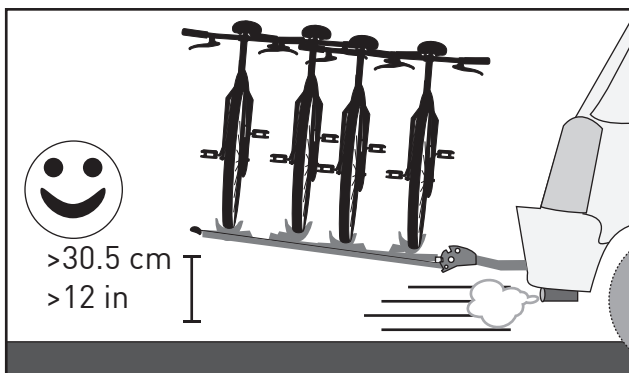

Technical Specifications

Bike carrier weight: 63lb / 28.6kg

Permitted load capacity: 190lb / 86.52kg

Max bike weight: 2 bikes at 60lbs and 2 bikes at 35lb



CAUTIONS:

- All requirements for compatibility/fit as stated in the current Saris vehicle/carrier compatibility guide must be followed. (Available at any Saris dealer). If your vehicle is not listed or you have any questions, please call our customer service.
- Read and follow instructions carefully. Save owner's manual for future reference or parts information. Ensure that any other users of the bicycle carrier are familiar with their content.
- It's the end users responsibility to ensure that use of this product meets all local and state laws.
- When cleaning vehicle and rack, use only water soluble cleaners. Do not take rack through car wash.
- Make sure bike tires are not directly behind exhaust pipe.
- Do not mount to any type of trailer, towed vehicle, or RV.
- Prior to usage on the road, remove all loose parts from bicycle, including (but not limited to) child seat, basket, lock, light, pump, etc.
- This carrier is not recommended for off-road use or for use at speed exceeding 70 mph (113 km/h).
- The handling characteristics of a vehicle will change when a rear bicycles carrier is fitted and especially when it is loaded (in particular crosswind sensitivity, handling on bends and braking). Driving techniques should be altered to allow for these changes, reduce speed, especially on bends and allowing for longer braking distances.
- The vehicle's total length increases when the bike carrier is attached. The bikes themselves may increase the vehicle's total width and height. Take care when reversing and/or entering garages or ferries, etc.
- Remove carrier from vehicle when not in use.
- This carrier is constructed to carry standard-bike-frames. It is not intended for use with tandem or recumbent bicycles.
- Replace any mounting strap at the first sign of wear. Replacement parts are available through your local Saris dealer or call.
- Tighten straps regularly during the journey.
- Vehicle should be in good condition in the area at which the hitch is located.
- Do not exceed maximum load capacity of carrier (2 bikes at 60lbs and 2 bikes at 35lb) Secure properly and adjust for even load distribution, loading the heaviest/biggest bike first and closest to the vehicle.
- Saris absolves itself of responsibility for any personal injuries or consequential damage to property or wealth caused by incorrect fitting or use.

Warning and Disclaimer:

This carrier has been designed to carry bicycles on specific vehicles. Before installation, user must read and follow current Saris Fit Guide (available through Saris dealer) recommendations and enclosed instructions. Fit recommendations are based on vehicle's standard features; optional features may affect the fit recommendations. User must attach carrier correctly to the vehicle, check its attachment before each use, and inspect carrier parts for wear. Carrier's attachment to the vehicle is critical and beyond the control of the manufacturer. Manufacturer and seller expressly disclaim any and all liability for personal injury, property damage or loss, whether direct, indirect, or incidental, resulting from the incorrect attachment, improper use, inadequate maintenance, or neglect of this carrier.