


Installation Instructions

Outback Wind Breaker
Part # 903xx
07-11 JK Unlimited (4-Door)

Note: Please read instructions entirely before installing this product.

- **Step 1:** Depending on what your vehicle is equipped with remove your hardtop or lower your soft top. This part can be installed with the soft top lowered back, but if you plan to install this part in conjunction with a Tonneau cover the soft top and bow assembly will need to be completely removed. It is also recommended for safety reasons to remove the bow assembly pivot brackets from the roll bar using a #30 torx bit. (Fig C)
- **Step 2:** Position the Windbreaker between your sport bar with the flap towards the back. Fasten the windbreaker by running the strap around the sport bar and through the buckle. (Fig A) Start with the top two center straps. (Fig B) Do not tighten completely at this time.

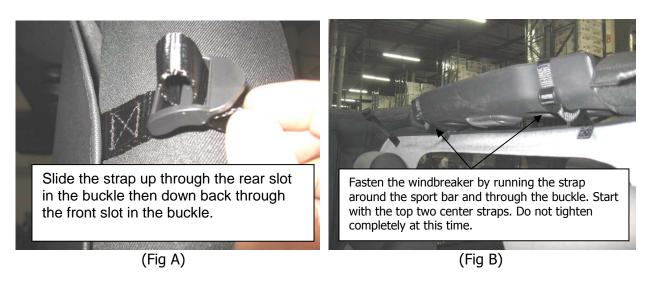


- **Step 3:** Now secure the two straps on each top corner of the windbreaker. (Fig D)
- **Step 4:** Secure the bottom four straps (2 per side) loosely around the back of the vehicles front seat risers. (Fig E, F)
- **Step 5:** Position the windbreaker so it's in the optimal centered location and then proceed to tighten all of the straps and buckles. Keep in mind; the amount the bottom straps are secured will effect your seat slider position. Installation is now complete.




Installation Instructions


Outback Wind Breaker Part # 903xx 07-11 JK Unlimited (4-Door)

Note: The zipper on the back of the windbreaker underneath the flap is to attach the Smittybilt Tonneau Cover combination. (Fig G,H)

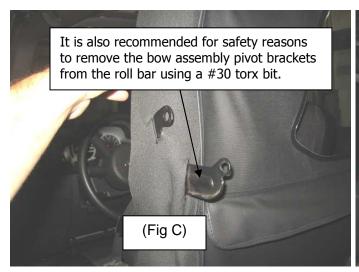








(Fig E) (Fig F)



Installation Instructions

Outback Wind Breaker Part # 903xx 07-11 JK Unlimited (4-Door)





(Fig G) (Fig H)

Note: To complete your soft good protection; purchase Smittybilt Tonneau Cover (Part# 7613xx) and Tonneau Cover Extension (Part# 7614xx). (Fig H)

CARE AND MAINTENANCE

Wash top with warm water and non abrasive soap. Do not wipe the windows with a dry rag or towel, use a clean water soaked sponge of soft cloth. The zippers should be lubricated to keep them running smoothly.