



**Installation Instructions**  
Replacement Top  
86-94 Suzuki Samurai

NOTE: Read instructions entirely before installing this product. This top is designed to be a snug/tight fit to reduce flapping and noise. It is recommended to install this product when temperatures are above 75 degrees. If temperatures are below this; the material can contract over an inch. Wrinkles from packaging will go away once the material relaxes. You must have the factory bow to install this part.

Parts Included	Qty
Top	1
Lock Nuts	2
Machine Screws	2

Parts Included	Qty
Tension Straps	2
Snaps with Screws	5


**Step 1:** Remove old top (if equipped)

**Step 2:** Using care place and spread new top over vehicle. (Fig A)

**Step 3:** Slide plastic channel sewn into the front of the top into the windshield channel on top of your windshield frame. Fasten the front snaps on each corner. (Fig B)



(Fig A)

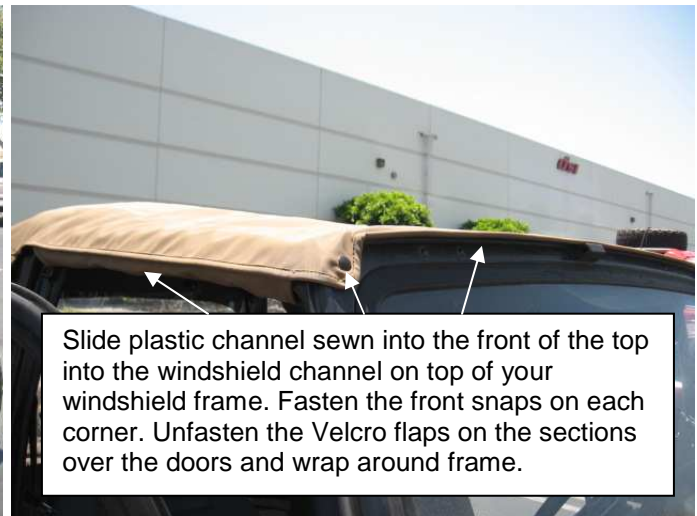

Slide plastic channel sewn into the front of the top into the windshield channel on top of your windshield frame. Fasten the front snaps on each corner. Unfasten the Velcro flaps on the sections over the doors and wrap around frame.

(Fig B)

**Step 4:** Unfasten the Velcro flaps on the sections over the doors and wrap around frame.(Fig B)




## Installation Instructions


Replacement Top  
86-94 Suzuki Samurai

**Step 5:** Slide the front edges of the side windows down along the side channels on the vehicle. (Fig C)

**Step 6:** With the top draped over the rear bow assembly, center it on the bow assembly. If your bow does not have snaps already attached you will need to install the included snaps. Use the snap flap as a guide to where the snaps should attach.(Fig D) Mark the location and drill a hole into the bow using a 3/32 drill bit.(use caution when drilling) now install snap.

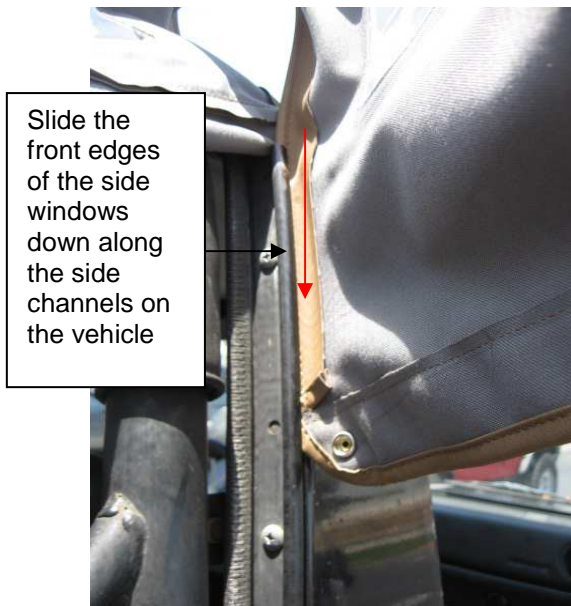

(Fig C)

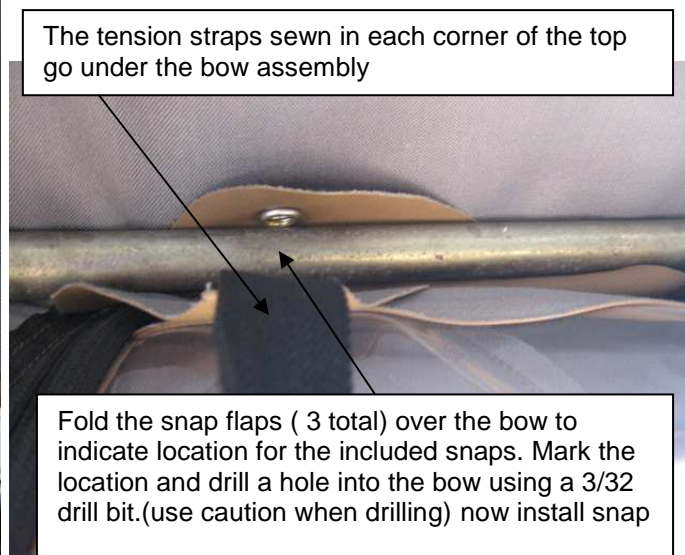


(Fig D)

**Step 7:** If the tension straps and brackets are not on your vehicle, install the two included with top. They mount on the inside lip of body tub just to the outside of the tailgate. (Fig E) Install by using the bracket as a template to mark the hole, then drill hole using a 7/32" drill bit. Secure bracket with included screw and nut. Unfasten the Velcro at the end of the newly installed tension strap and pull it up and slide it through the buckle end of the tension straps on the top.(Fig D)Then pull tightly down and fasten Velcro back together. (Do not pull excessively)




## Installation Instructions

Replacement Top  
86-94 Suzuki Samurai

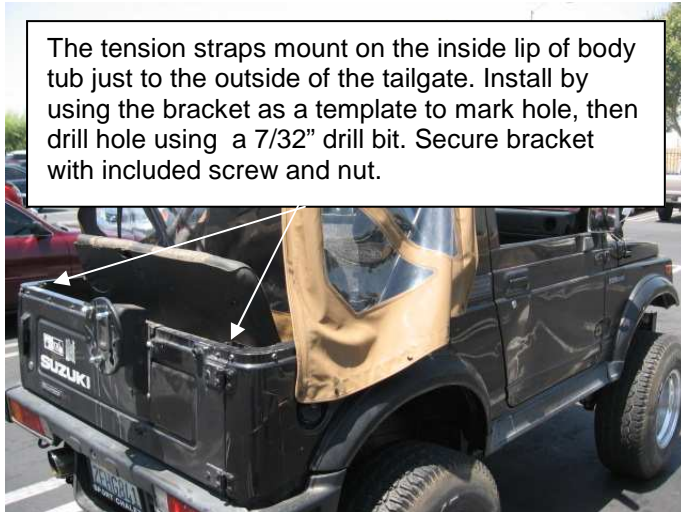

The tension straps mount on the inside lip of body tub just to the outside of the tailgate. Install by using the bracket as a template to mark hole, then drill hole using a 7/32" drill bit. Secure bracket with included screw and nut.

(Fig E)

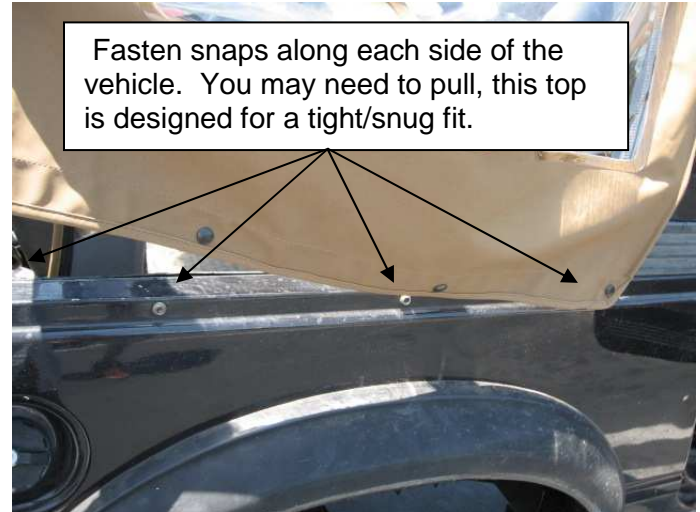

Fasten snaps along each side of the vehicle. You may need to pull, this top is designed for a tight/snug fit.

(Fig F)

**Step 8:** Now fasten snaps along each side of the vehicle. (Fig F) You may need to pull, this top is designed for a tight/snug fit.

**Step 9:** Fasten the rear snap-holes on the rear curtain over the studs on the rear of your vehicle. (Fig G)



Fasten the rear snap-holes on the rear curtain over the studs on the rear of your vehicle.

(Fig G)



(Fig H)



## ***Installation Instructions***

Replacement Top  
86-94 Suzuki Samurai

---

---

**Step 10:** Make sure front over head door flaps are secured. (Fig B) Installation is now complete.  
(Fig I)

**Note:** If temperatures are not at the recommended degree you can try lying top on vehicle hood (not running) to warm top. Or using Extreme caution; a low heat type of heat gun.

### **Care and Maintenance**

-**TOP**, The top should only be washed with soap and warm water. Do not use an abrasive cleaner or rag. Especially on the windows.

- **SNAPS**, Keep the snaps (if applicable) clean and a silicone lubrication will help prevent them from sticking together.

-**SEAMS**, If seeps happen to occur in seams they can be treated with a Scotchguard type of spray. Patches can also be applied on the inside of the top in the case of a rip or tear.

-**Zippers**, Keep zippers clean and apply a silicone lubricant to them to help prevent damaged to them and keep them operating smoothly. Zipper heads can also be repaired if they happen to spread apart by using pliers to gently squeeze the head back together