



Installation Instructions

G.E.A.R. Seat Cover

(Universal Fit)

Note: Carefully read the following installation instructions and tips for ease of installation.



STEP 1: Position the cover over the seat. Then begin to attach the Velcro straps together by sliding them through the plastic ring and then fold back. (Fig A, B) You can also adjust the width of the cover by adjusting the placement of the plastic ring on the inside Velcro strap. (Fig C)



Fig A



Fig B

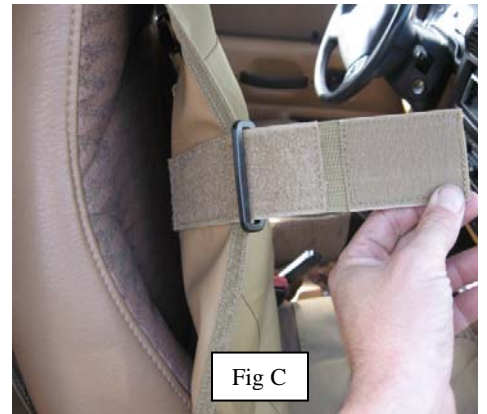


Fig C

STEP 2: Position the bottom portion of the cover across the seat bottom. Attach the hooks underneath the seat to a place that gives it a nice fit. Be sure the position does not hinder any sliding or folding features of the factory brackets. (Fig D,E, F)



Fig D

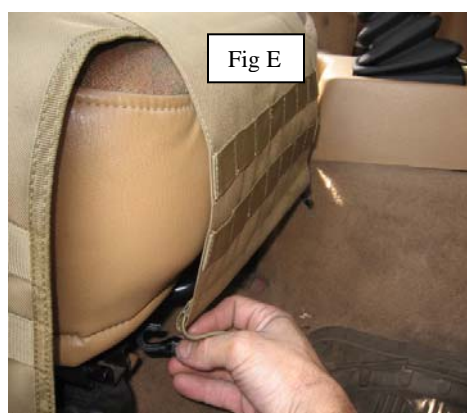


Fig E



Fig F



Installation Instructions

G.E.A.R. Seat Cover

(Universal Fit)

STEP 3: After the cover is completely on you may adjust the straps in order to get a better fit. You can adjust the cover and straps accordingly to access any special seat features like levers or knobs. You also can tuck and fold the straps behind the cover in order not to hinder Air Bag use or if your seat has a high headrest. (Fig G, H, I)



STEP 4: You may now install your pouches. What makes this cover even more versatile is that you may install the pouches wherever you like. After determining the proper place slide the pouch straps through the webbing on the seat cover (Fig J), secure the pouch by fastening the snaps together. Installation is now complete. You may now make final fitment adjustments to your cover. Make sure all straps are secured and not obstructing seat functions

