



# FORD 6F50, 6F55 ZIP KIT®

PART NUMBER 6F50-ZIP


QUICK GUIDE

Parts are labeled here in order of installation. See other side of sheet for details on kit contents.

## INSTALLATION DIAGRAM




**CAUTION:** Ensure shuttle valve is installed with blind bore facing inboard and rounded, closed end facing the end plug.

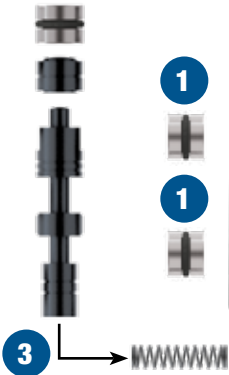

1

1

3

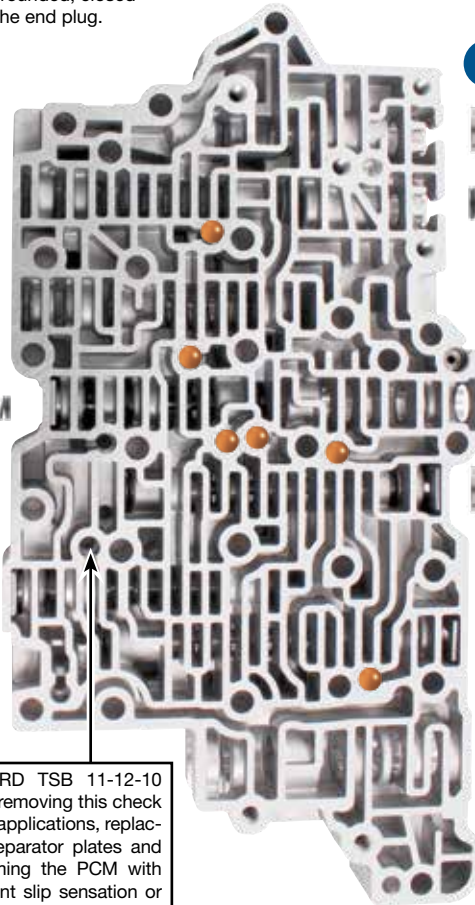

1

1

6F50 Upper Valve Body

2

6

Replace six OE checkballs



1

1

4


6F50 Lower Valve Body

1



**CAUTION:** FORD TSB 11-12-10 recommends removing this check ball in some applications, replacing both separator plates and reprogramming the PCM with latest updates to prevent slip sensation or sluggish acceleration from a stop.

### 6F50 Separator Plate

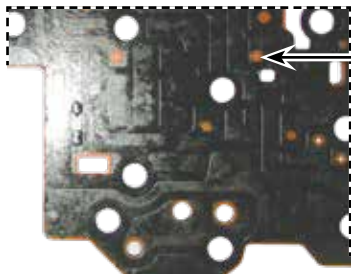

5



**CAUTION:** Failure to block orifice will result in no movement of vehicle.

Block AFL balance port by drilling and plugging separator plate where indicated using drill bit and aluminum plug provided (not shown).



**NOTE:** O-Ringed end plug not applicable here in some instances.

In addition to general rebuilding tips and technical information, the technical booklet included in this kit contains vacuum testing and additional repair options for higher mileage units or for repairing specific complaints which are beyond the scope of this kit.

## Kit Contents & Installation Steps

### Step 1 Replace Seven OE End Plugs



**NOTE:** O-Ringed end plug should not be used on later 6F50 applications without short shuttle valve, and that have long (approximately .940") end plugs. Reference page 6 for exploded view.

Place O-ring into end plug groove. Lubricate with Sonnax Slippery Stick **O-LUBE** and roll on bench to size.

#### Packaging Pocket 1

- End Plugs (7)
- O-Rings (11) 4 extra

### Step 2 Replace OE Isolator Valve & Spring

Remove and discard all OE components except the end clip. Save OE end clip for reuse. Place one O-ring into plug groove and one O-ring into isolator valve groove. Lubricate with Sonnax Slippery Stick **O-LUBE** and roll on bench to size.

#### Packaging Pocket 2

- End Plug
- Valve
- Spring
- O-Rings (3) 1 extra

### Step 3 Replace OE TCC Regulator Apply Valve Bore Lineup

Remove and discard all OE components except the end clip. Save OE end clip for reuse.



**CAUTION:** Ensure shuttle valve is installed with blind bore facing inboard and rounded, closed end facing the end plug.

#### Packaging Pocket 3

- TCC Regulator Valve
- Spring
- Shuttle Valve
- End Plug
- O-Rings (2) 1 extra

### Step 4 Replace OE Solenoid Pressure Regulator Valve Lineup

Remove and discard OE valve and spring. Keep outboard OE retainer for reuse. Install Sonnax sleeve and valve as illustrated. Secure sleeve into bore by installing Sonnax clip into sleeve groove at inboard port. Install Sonnax spring and secure all components into the bore with OE retainer.

#### Packaging Pocket 4

- Sleeve
- Valve
- Spring
- Clip

### Step 5 Block Solenoid Pressure Regulator Balance Port

Drill indicated separator plate orifice with included .062" diameter drill bit. Remove any burrs. Insert .062" diameter aluminum plug into drilled hole and peen in place on both sides of plate. Ensure plate will sit flush on both castings.



**CAUTION:** Ensure supplied retainer clip is fully seated in AFL sleeve groove after installation.

#### Packaging Pocket 5

- Drill Bit (.062" dia.)
- Aluminum Plugs (2) 1 extra

### Step 6 Replace OE Checkballs



**CAUTION:** OE valve body may contain 7 checkballs. Reference Ford TSB 11-12-10 for recommended removal of one check ball and replacement of separator plates for some vehicles.

#### Packaging Pocket 6

- Checkballs (7) 1 extra



# FORD 6F50, 6F55 ZIP KIT®

PART NUMBER **6F50-ZIP**

**INSTALLATION & TESTING BOOKLET**

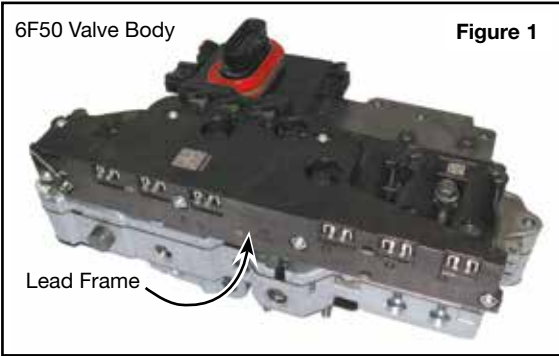


Figure 1

## 6F50 Valve Body ID & Tech Tips

### Reprogramming

Many transmission performance concerns both prior to and after an overhaul can be addressed by reflashing or reprogramming the PCM. Refer to OE reflashing procedures.

### Part Updates

Ford has made numerous part updates to deal with drivability complaints, including changes to the range sensor, TSS and OSS. Ensure the latest updates are made.

### Solenoid Body Identification & Strategy

The solenoid body strategy is a file programmed into the PCM to control the various solenoids to prevent shift concerns. The original solenoid body tag on the transmission case indicates the solenoid strategy and solenoid body I.D. (Figure 2). These must match the numbers on the lead frame attached to the valve body (Figure 3).

Anytime a new solenoid body is installed, a new strategy file is downloaded into the PCM with a scan tool. A replacement tag (Figure 4) must be placed on the case as well.

**NOTE:** The solenoid strategy is always 13 numeric digit. The solenoid body ID is a combination of numeric digits and any letters A–F.

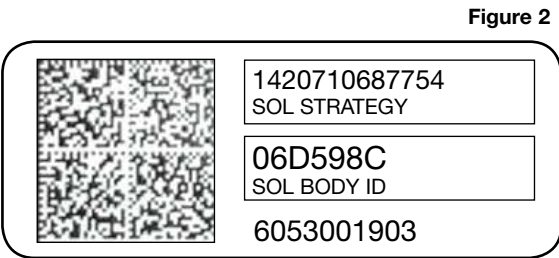


Figure 2

Identification: The original solenoid body tag on transmission case will look like this.

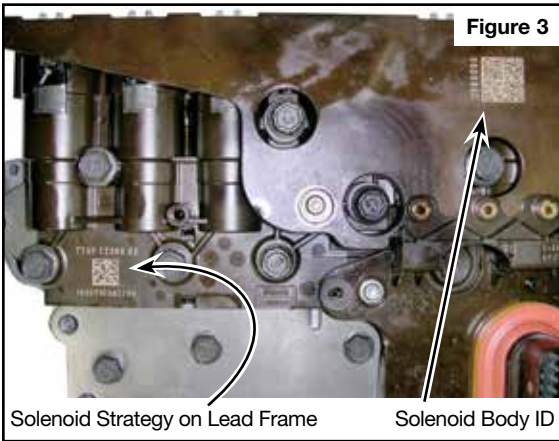


Figure 3

### Clutch Apply Chart

Figure 5

Gear	Direct Clutch	Overdrive Clutch	Forward Clutch (Brakes)	Low/Reverse Clutch (Brake)	Intermediate Clutch (Brake)	One-Way
Drive	1st		X	X		X
	2nd		X		X	Overrunning
	3rd	X		X		Overrunning
	4th		X	X		Overrunning
	5th	X	X			Overrunning
	6th		X			X
Reverse	X			X		

### Solenoid Apply Chart

Figure 6

PCM Commanded Gear	Shift Solenoid					TCC (VFS) NL	
	SSA (VFS) NL	SSB (VFS) NH	SSC (VFS) NL	SSD (VFS) NH	SSE (on/off) NC		
Park		X			X		
Reverse					X		
Neutral		X		*	X*		
Drive	1st	X	X		X*		
	2nd	X	X	X	X		
	3rd	X			X		
	4th	X	X				on/off
	5th						on/off
	6th		X	X			on/off
Low	X	X		*	X*		

KEY: X = On/Applied \* = Modulating

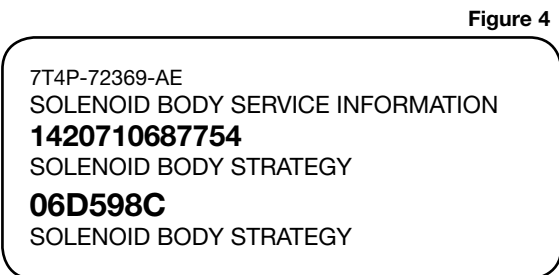


Figure 4

7T4P-72369-AE  
SOLENOID BODY SERVICE INFORMATION  
**1420710687754**  
SOLENOID BODY STRATEGY  
**06D598C**  
SOLENOID BODY STRATEGY

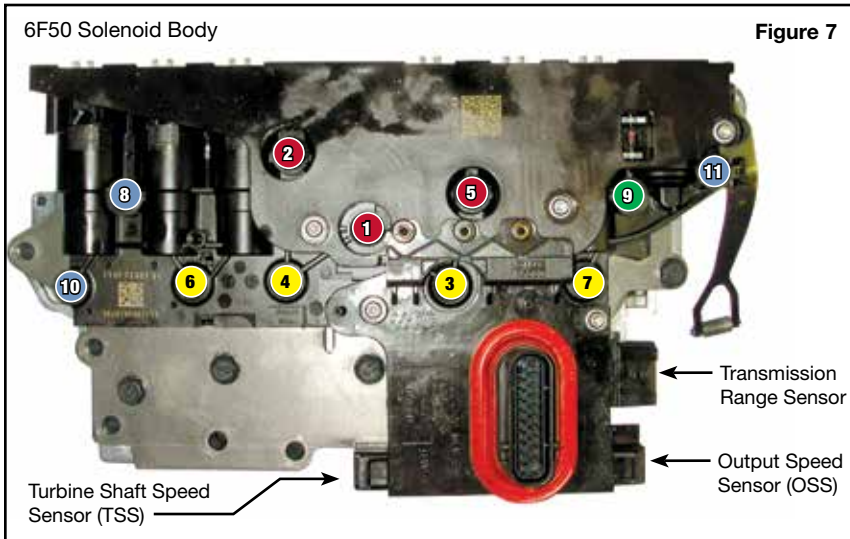


Figure 7

**1. Valve Body Removal from Case (Figure 7)**

- a. Disconnect transmission range sensor.
- b. Disconnect output speed sensor (OSS).
- c. Disconnect turbine shaft speed sensor (TSS).
- d. Remove 11 bolts and solenoid body. Handle solenoid body with care to prevent damage.

**2. Disassembly (Figures 9 & 10)**

- a. Remove the solenoid filter plate (Figure 9) from the back of the solenoid body. Discard and replace as the seals will leak if reused.
- b. Remove the 10 (blue) 62mm bolts, transmission range sensor detent spring and main control valve body (Figure 10).
- c. Remove the three (orange) 35mm bolts and seven (purple) 62mm bolts to disassemble the valve body (Figure 10).

**3. Installation**

Install Zip Kit parts as shown on diagram of separate quick guide sheet included in this Zip Kit. Sonnax recommends vacuum testing critical wear areas not covered by this kit to determine whether additional Sonnax parts are required (see page 3 and 4).

**4. Separator Plate Update**

Reference Ford TSB 11-9-11. Some vehicles 2009–2011 using MERCON LV (indicated on dipstick) require a separator plate and checkball update to eliminate drivability issues.

**5. Reassembly**

Install the three (orange) 35mm bolts and seven (purple) 62mm bolts (Figures 8 and 10). Torque to 106 in-lb.

**6. Valve Body Reinstall to Case**

- a. Install valve body into transmission using 10 (blue) 62mm bolts. Hand tighten first, then tighten in indicated sequence to 106 lb-in (Figure 10).
- b. Install a new solenoid filter plate (Figure 9).
- c. Install solenoid body and secure with 11 bolts (Figure 7). Hand tighten, then tighten in the sequence shown to 106 lb-in.
- d. Reconnect transmission range sensor.
- e. Reconnect output speed sensor (OSS).
- f. Reconnect turbine shaft speed sensor (TSS).

**6F50 Disassembly & Reassembly Bolts**

Figure 8

Bolt Color Code	Bolt Length	Torque
Purple	62mm	106 in-lb
Orange	35mm	
Green	42mm	
Blue	62mm	
Red	95mm	
Yellow	80mm	



Figure 9

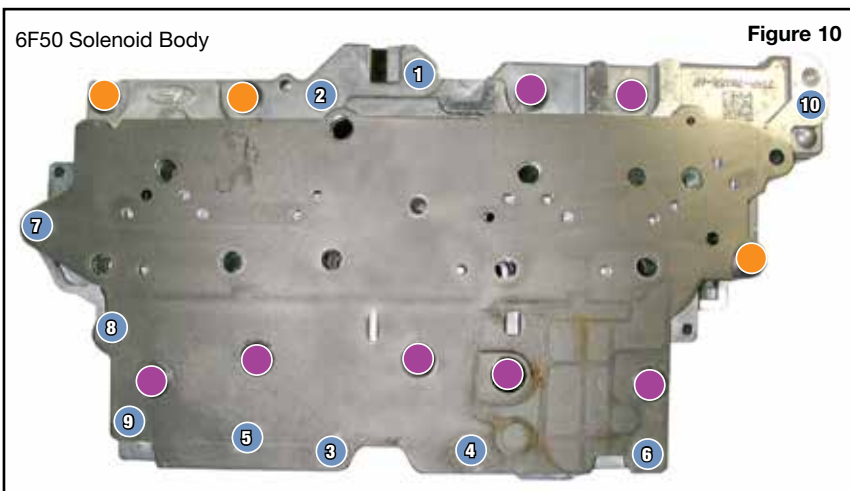


Figure 10

# Critical Wear Areas & Vacuum Test Locations



**NOTE:** OE valves are shown in rest position and should be tested in rest position unless otherwise indicated. Test locations are pointed to with an arrow. Springs are not shown for visual clarity. Low vacuum reading indicates wear and Sonnax parts noted for replacement. For specific vacuum test information, refer to individual part instructions included in kits and available at [www.sonnax.com](http://www.sonnax.com).

## Upper Valve Body • 6F50 Shown

### Direct Clutch Regulator Valve

- 2-3 & 4-5 Flare
- Delayed Reverse
- Reverse slip
- 3-5 Reverse clutch burned
- Ratio Codes
- Bind-up

Replace with Sonnax Part No.

**124740-26K** (1.35 Ratio) Requires F-124740-TL26 & VB-FIX

**124740-21K** (1.83 Ratio) Requires F-124740-TL21 & VB-FIX

### Intermediate Clutch Regulator & Gain Valve

- 1-2 & 5-6 Flare
- 2nd & 6th Slip
- No 2nd or 6th
- Ratio codes
- 2-6 Clutch burned
- Erratic shift timing

Replace with Sonnax Part No.

**124740-17K**

Requires F-124740-TL17 & VB-FIX

### TCC Regulator Apply Valve

- Code P0741, 742
- TCC slip
- Harsh TCC apply
- Loss of fuel economy
- Low TCC apply pressure
- Overheated fluid & TCC lining

Replace with Sonnax Part No.

**124740-24K**

Requires F-124740-TL24 & VB-FIX

### L/R Overdrive Clutch Regulator Valve

- Burnt L/R and/or Overdrive clutch
- 4-5-6 Shift concerns
- Delayed Reverse
- 3-4 Flare

### O-Ringed End Plug Kit

- Pressure loss
  - Shift concerns
  - Burnt clutches
  - TCC apply concerns
- NOTE:** Vacuum test end plugs at outboard port while sealing bore opening with thumb.

Replace with Sonnax Part No.

**124740-02K\***

**NOTE:** Several Locations = ★

### Pressure Regulator Valve

- Erratic line pressure
- Poor shift quality
- Burnt clutches
- Low converter & lube flow
- Overheating
- TCC apply & release concerns

Replace with Sonnax Part No.

**124740-12K** Requires F-124740-TL12 & VB-FIX

### Isolator Valve

- Low line pressure
- No line rise
- Line pressure instability
- Burnt clutches
- Harsh shifts
- Shift concerns

Replace with Sonnax Part Nos.

**124740-16** (Spring Only)

**124740-03K\*** (Isolator Valve Kit)

### TCC Control Valve

- Excess TCC slip
- Overheating
- Low cooler flow
- TCC apply & release concerns
- Low converter & lube flow
- TCC apply codes
- TCC lining failure

Replace with Sonnax Part No.

**124740-14K**


Requires F-124740-TL14 & VB-FIX

### Multiplex Manual Valve

- Various shift concerns
- Shift codes

### Multiplex Shift Valve

- Various shift concerns
- Shift codes

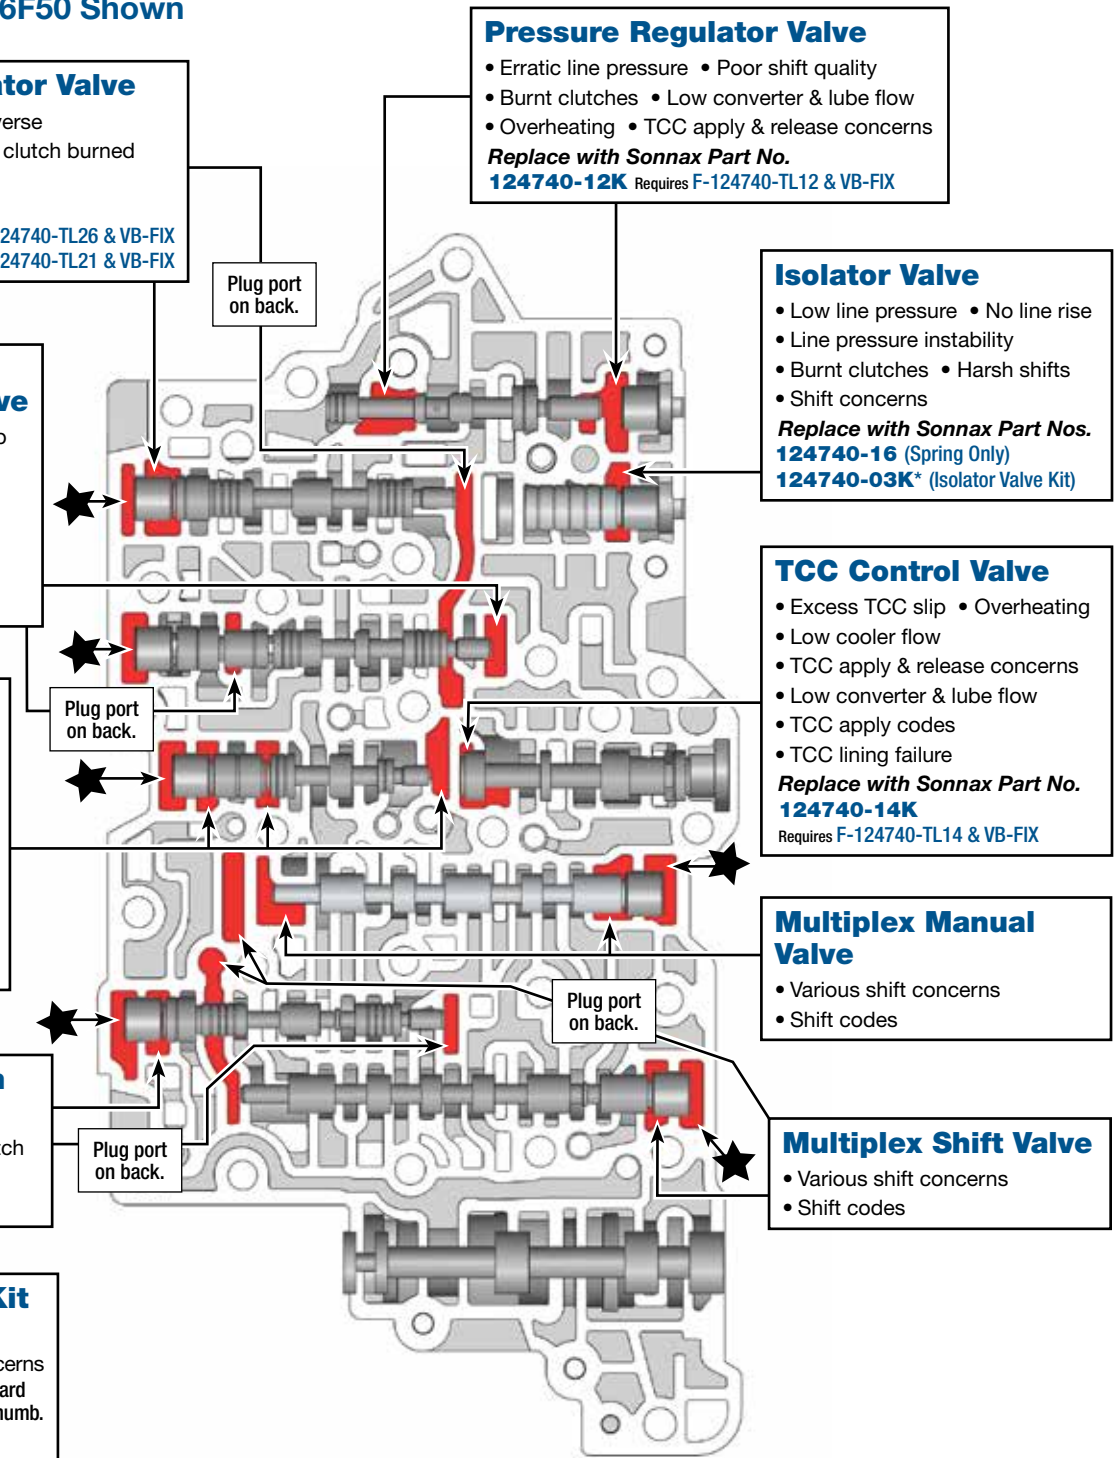


\*Part numbers with an asterisk (\*) are included in this Zip Kit.

# Critical Wear Areas & Vacuum Test Locations



**NOTE:** OE valves are shown in rest position and should be tested in rest position unless otherwise indicated. Test locations are pointed to with an arrow. Springs are not shown for visual clarity. Low vacuum reading indicates wear and Sonnax parts noted for replacement. For specific vacuum test information, refer to individual part instructions included in kits and available at [www.sonnax.com](http://www.sonnax.com).

## Lower Valve Body • 6F50 Shown

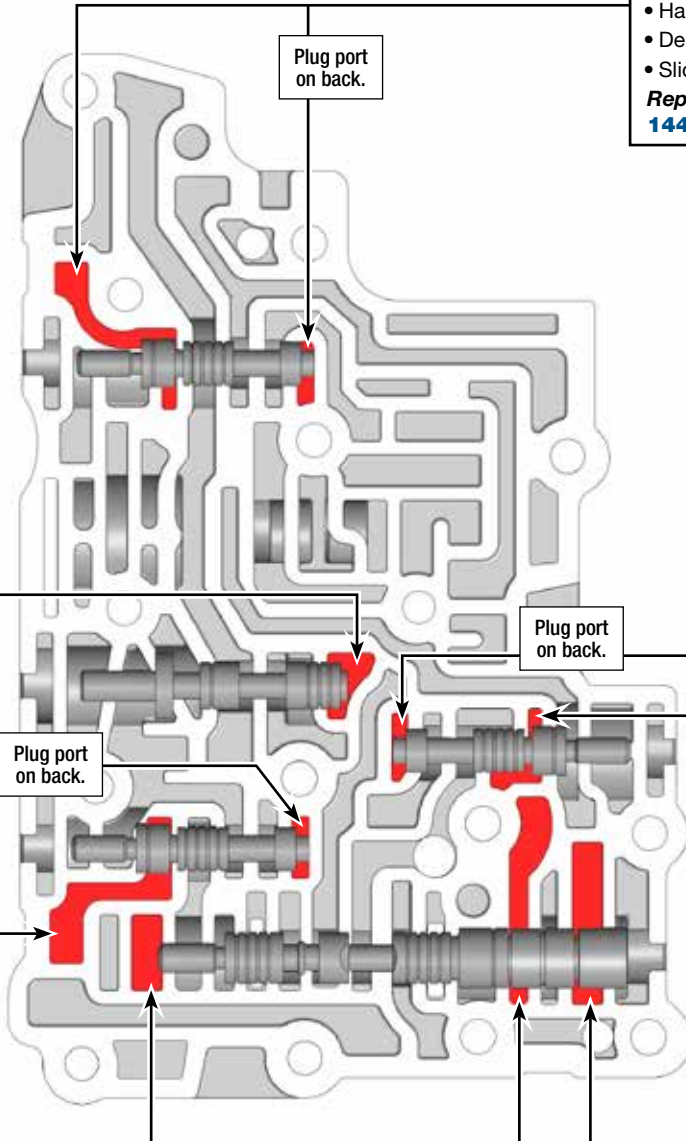

### Direct Clutch Latch Valve

- Shift quality is not load sensitive
  - Harsh shifts • Slips & flares
  - Delayed engagement • Burnt clutches
  - Slide shifts • Slip codes
- Replace with Sonnax Part No. 144740-23** Requires F-144740-TL22 & VB-FIX

### AFL (Actuator Feed Limit) Valve

- Solenoid performance codes
  - Wrong gear starts
  - Clutch failure
- Replace with Sonnax Part No. 124740-01**  
Requires F-104740-TL12 & VB-FIX

### Forward Clutch Latch Valve

- Shift quality is not load sensitive
  - Harsh shifts • Slips & flares
  - Delayed engagement
  - Burnt clutches
  - Slide shifts • Slip codes
- Replace with Sonnax Part No. 144740-23**  
Requires F-144740-TL22 & VB-FIX

### L/R Overdrive Clutch Latch Valve


- Shift quality is not load sensitive
  - Harsh shifts • Slips & flares
  - Delayed engagement
  - Burnt clutches
  - Slide shifts • Slip codes
- Replace with Sonnax Part No. 144740-23**  
Requires F-144740-TL22 & VB-FIX

### Forward Clutch Regulator Valve

- Burnt Forward clutch
  - Delayed Forward
  - 1-2-3-4 Shift concerns
- NOTE:** Vacuum locations are the same regardless of OE end plug design and inclusion of short shuttle valve.

## OE Exploded View

### Upper Valve Body • 6F50 Shown

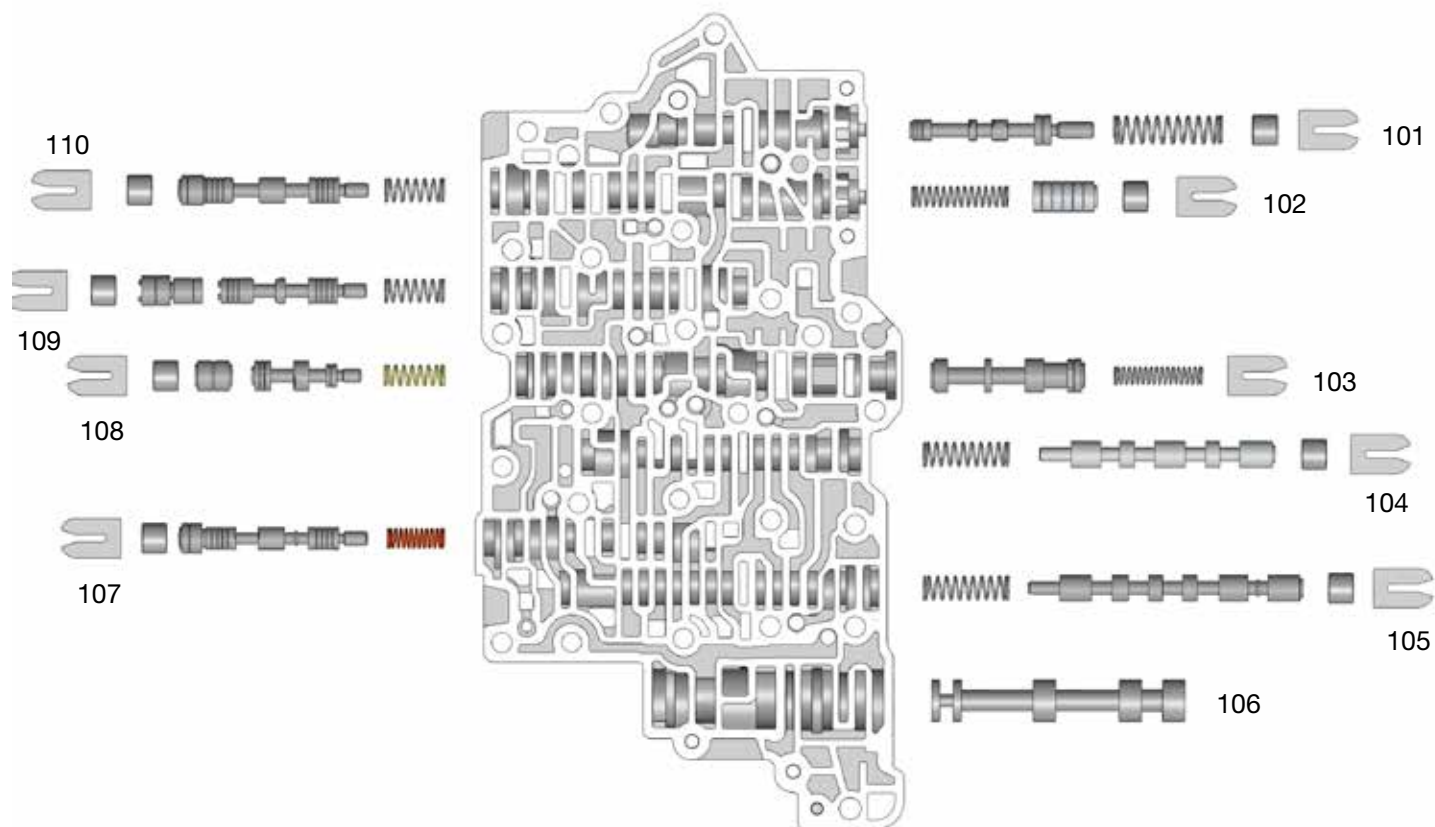


#### Upper Valve Body Descriptions

I.D. No.	6F50 Description
101	Pressure Regulator Valve
102	Isolator Valve
103	TCC Control Valve
104	Multiplex Manual Valve
105	Multiplex Shift Valve
106	Manual Valve
107	L/R Overdrive Clutch Regulator Valve
108	TCC Regulator Apply Valve
109	Intermediate Clutch Regulator & Gain Valve
110	Direct Clutch Regulator Valve

## OE Exploded View

Lower Valve Body • 6F50 Shown

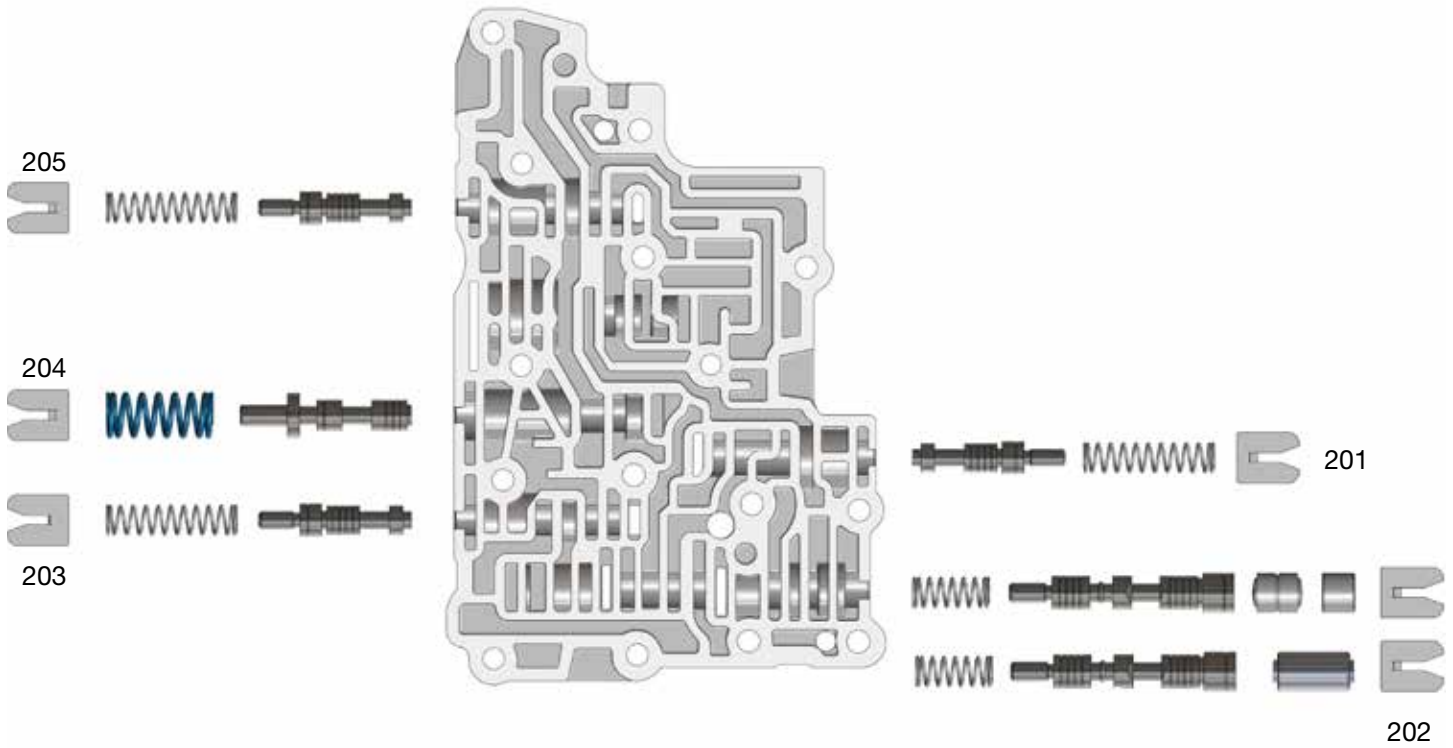

<b>Lower Valve Body Descriptions</b>	
<b>I.D. No.</b>	<b>6F50 Description</b>
201	Forward Clutch Latch Valve
202	Forward Clutch Regulator Valve
203	L/R Overdrive Clutch Latch Valve
204	Solenoid Pressure Regulator Valve
205	Direct Clutch Latch Valve



# sonnax®

## YOUR #1 SOURCE

# for Vacuum Testing Tools & Guides

### Vacuum Test Stand Kit Part No. VACTEST-01K

- Quick & Easy Setup
- Accurate, Repeatable Tests
- Guaranteed Sonnax Quality

Good equipment is essential for quality valve body repair and the Sonnax vacuum test stand kit is an easy, affordable alternative to building your own rig.



### Vacuum Test Plates

#### Find Valve Body Problems 2X FASTER

Each plate seals over the entire valve body, leaving ports open at key test areas. Easy-to-follow instruction guides identify valves, symptoms of wear and the right Sonnax parts for repair.

**GM 4L60-E, 4L65-E, 4L70-E** Part No. 77754-VTP

**ZF6HP19/24/26 (Gen.1), Ford 6R60/80** Part No. 95740-VTP1

**Ford 5R55N/S/W** Part No. 56947J-VTP

### ZF6 Solenoid Manifold Test Kit Part No. 95430-VTK

#### Identify Problem Solenoids Quickly & Cost-Effectively

For use with the Sonnax vacuum test stand, this test kit is a quick, easy and affordable way to verify the internal sealing integrity of ZF6 Gen. 1 and Gen. 2 solenoids.

### FREE Vacuum Test Guides

- Learn Locations to Test on 25+ Units
- Identify Common Problems
- Select Parts for Repairs





Choose from  
**18 KITS**

**Aisin AW**

55-50/51SN *Also Fits AF 23/33 & RE5F22A*

60-40LE (AF-13)

60-41SN (AF-17)

**Ford**

4/5R44E, 4/5R55E

6F35

6F50, 6F55

**New! 6R140**

**GM**

6L45, 6L50, 6L80, 6L90

First Gen. 6T40/45/50

First Gen. 6T70/75

**Toyota/Lexus**

A340E/F '00-Later V6 & V8

A750E/F, A760E/F/H, A761E, A960E/F

U140E/F, U240E, U241E

U151E/F, U250E

U660E/F

U760E/F

**ZF**

ZF6HP19/26/32 (Gen. 1), Ford 6R60/80

ZF6HP21/28/34 (Gen. 2)



**sonnax®**  
**ZIP**  
**KIT®**

**THE FIRST STEP**  
**IN CORRECTING COMMON SHIFT PROBLEMS**

**No Reaming Required**

**Stops Hydraulic Leaks**

**In-Depth Tech Booklet**

Learn more about performance transmission parts we have.