SPAL AUTOMOTIVE

30100385 VA08-AP10/C-23A
30100382 VA08-AP10/C-23S

12V C.C. - D.C.

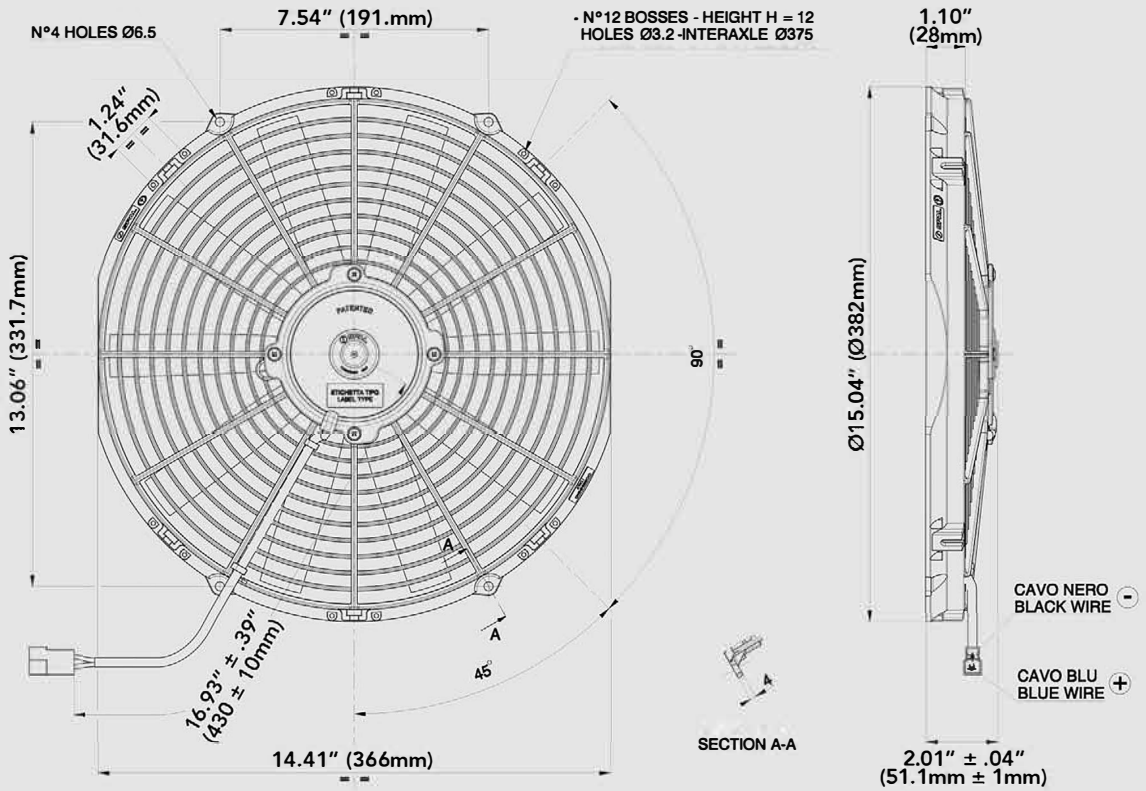

⌀ 350 mm

⌀ 14"

AMP connector Code 180908
AMP terminal Code 42098-2
Suggested mounting torque: 3(+1/-0) Nm with screw M5
Weight 1,3 Kg. approx.

PRODUCT FEATURES

Waterproof motor, IP 68 *Motore chiuso, IP 68*	✓
Long life / *Lunga durata*	✓
LL and VLL version* *Versione LL e VLL**	✓
Waterproof connector *Connettori a tenuta stagna*	✓
Accessories: all the fixing kits *Accessori: tutti i kit di fissaggio*	✓

	suction			blowing			
Static pressure **mm H_2O**	Airflow *Portata* **m³/h**	Current input *Corrente assorbita* **A**	Airflow *Portata* **CFM**	Airflow **m³/h**	Current input **A**	Airflow **CFM**	**Static pressure** **inH_2O**
0	1620	6,5	956	1620	5,5	956	0
2,5	1440	6,9	850	1420	5,8	838	0,1
5	1220	7,2	720	1190	6,0	702	0,2
7,5	820	6,8	484	810	6,1	478	0,3
10	500	6,9	295	370	5,8	218	0,4
15	0	6,8	0	0	5,8	0	0,6

* for OEM applications only.

✓ = Standard feature

✓ = Avaliable upon request

Test voltage 13 V. d.c.

Learn more about engine cooling on our website.