


12V C.C. - D.C.

VA10-AP50/C-25A  
VA10-AP50/C-25S

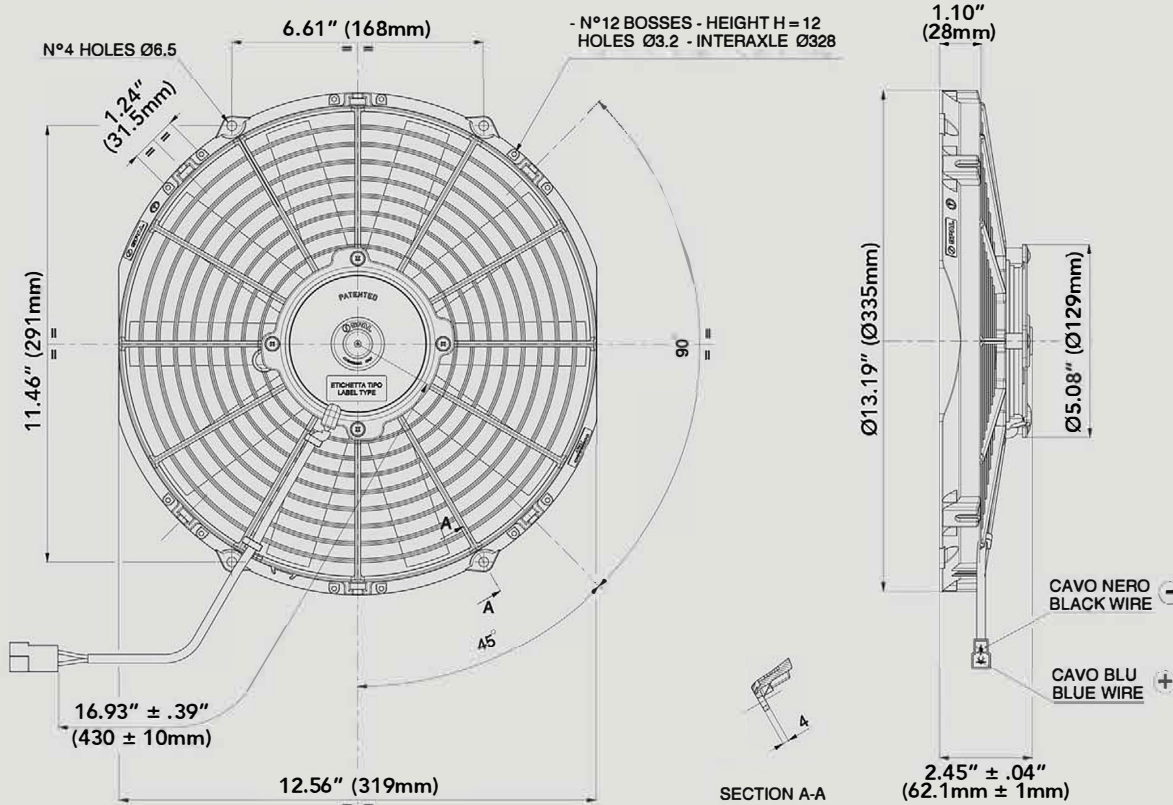

AMP connector Code 180908  
AMP terminal Code 42098-2  
Suggested mounting torque: 3(+1/-0) Nm with screw M5  
Weight 1,5 Kg. approx.

Ø 305 mm  
Ø 12"

suction

blowing

PRODUCT FEATURES

Static pressure Pressione statica mm H <sub>2</sub> O	suction			blowing			Static pressure Pressione statica inH <sub>2</sub> O
	Airflow Portata m <sup>3</sup> /h	Current input Corrente assorbita A	Airflow Portata CFM	Airflow Portata m <sup>3</sup> /h	Current input Corrente assorbita A	Airflow Portata CFM	
0	1860	10,0	1097	1710	8,2	1009	0
2,5	1750	10,2	1033	1590	8,5	938	0,1
5	1610	10,6	950	1470	9,3	867	0,2
7,5	1490	10,6	879	1330	9,0	785	0,3
10	1300	10,7	767	1200	9,6	708	0,4
12,5	1150	10,7	679	1050	9,8	620	0,5
15	800	10,3	472	820	9,6	484	0,6
17,5	700	10,5	413	550	9,5	325	0,7
20	490	10,5	289	380	9,3	224	0,8
25	350	10,8	207	0	8,9	0	1
30	0	10,7	0				1,2

Waterproof motor, IP 68	✓
Long life	✓
LL and VLL version*	✓
Waterproof connector	✓
Accessories: all the fixing kits	✓

\* for OEM applications only. ✓ = Standard feature  
✓ = Available upon request

Test voltage 13 V. d.c.