


12V C.C. - D.C.

VA08-AP51/C-23A
VA08-AP51/C-23S

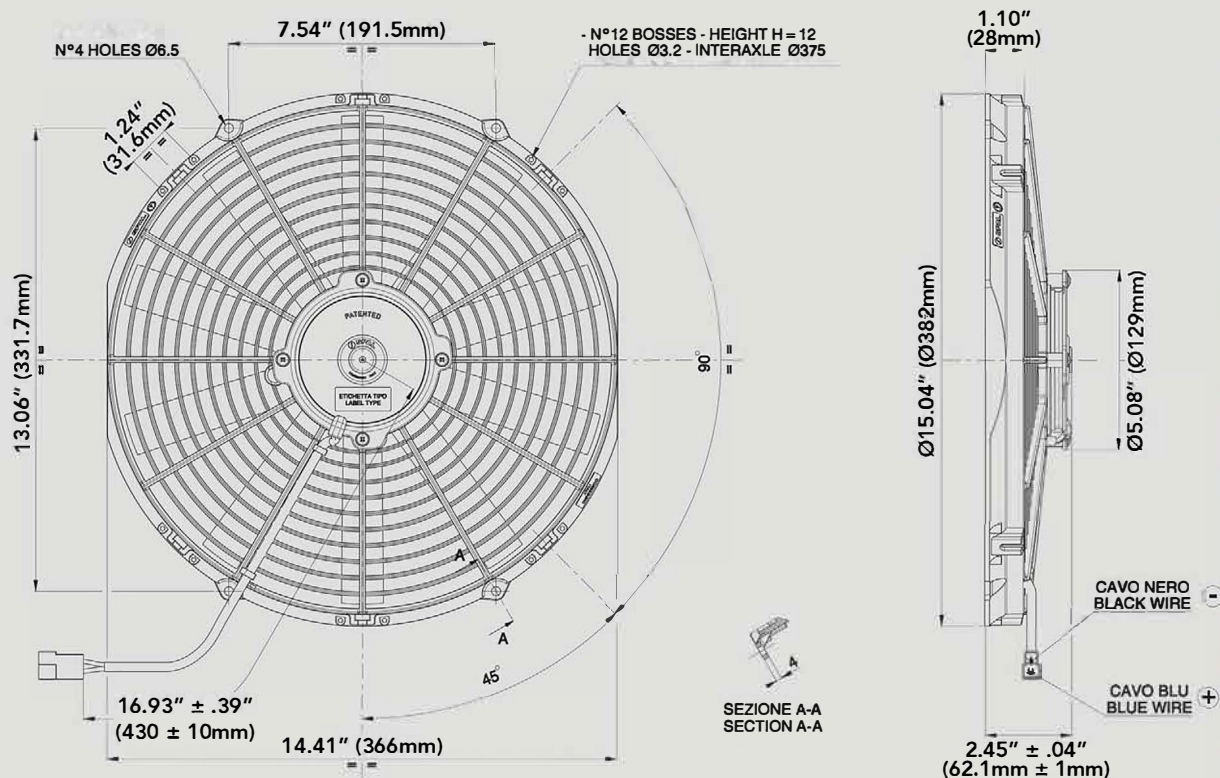

AMP connector Code 180908
AMP terminal Code 42098-2
Suggested mounting torque: 3(+1/-0) Nm with screw M5
Weight 1,7 Kg. approx.

Ø 350 mm

Ø 14"

suction

blowing

PRODUCT FEATURES

Static pressure mm H ₂ O	Airflow Portata m ³ /h	Current input Corrente assorbita A	Airflow Portata CFM	Airflow m ³ /h	Current input A	Airflow CFM	Static pressure inH ₂ O
0	2220	9,5	1310	2140	8,7	1263	0
2,5	2020	9,8	1192	1970	9,2	1162	0,1
5	1810	10,2	1068	1810	9,5	1068	0,2
7,5	1590	10,4	938	1640	9,7	968	0,3
10	1370	10,1	808	1430	9,8	844	0,4
12,5	1140	9,9	673	1120	10,1	661	0,5
15	820	9,8	484	770	10,0	454	0,6
17,5	550	9,9	325	340	9,3	201	0,7
20	300	9,9	177	150	9,5	89	0,8
25	0	9,7	0	0	9,6	0	1

Waterproof motor, IP 68



Long life



LL and VLL version*



Waterproof connector



Accessories: all the fixing kits



* for OEM applications only. ✓ = Standard feature

✓ = Available upon request

Test voltage 13 V. d.c.

Learn more about engine cooling on our website.