


12V C.C. - D.C.

VA10-AP70/LL-61A  
VA10-AP70/LL-61S

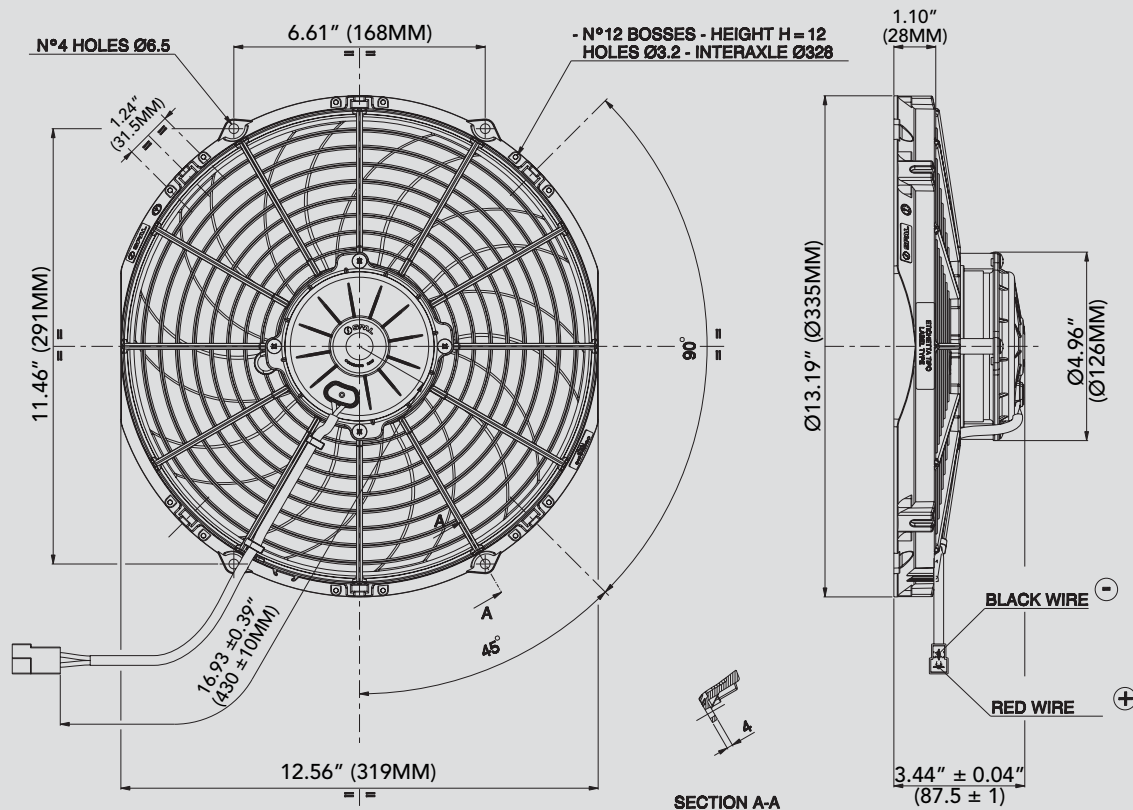

AMP connector Code 180908  
AMP terminal Code 42098-2  
Suggested mounting torque: 3(+1/-0) Nm with screw M5  
Weight 2,33 Kg. approx.

Ø 305 mm

Ø 12"

suction

blowing

PRODUCT FEATURES

Static pressure mm H <sub>2</sub> O	suction			blowing			Static pressure inH <sub>2</sub> O
	Airflow m <sup>3</sup> /h	Current input A	Airflow CFM	Airflow m <sup>3</sup> /h	Current input A	Airflow CFM	
0	2250	13,5	1328	2190	12,6	1292	0
5	1950	14,2	1151	1910	13,1	1127	0,2
10	1570	13,7	926	1590	13,4	938	0,4
12,5	1260	13,6	743	1460	14,3	861	0,5
15	950	13,2	561	1200	13,7	708	0,6
17,5	770	13,6	454	820	13,9	484	0,7
20	580	13,6	342	470	13,2	277	0,8
22,5	430	13,5	254	320	13,4	189	0,9
25	220	13,6	130	120	13,6	71	1
30	0	14,1	0	0	14,3	0	1,2

Waterproof motor, IP 68	✓
Low noise	✓
Long life	✓
VLL version*	✓
Waterproof connector	✓
Accessories: all the fixing kits	✓

\* for OEM applications only. ✓ = Standard feature

✓ = Available upon request

Test voltage 13 V. d.c.

Learn more about engine cooling on our website.