


12V C.C. - D.C.

VA01-AP70/LL-36A
VA01-AP70/LL-36S

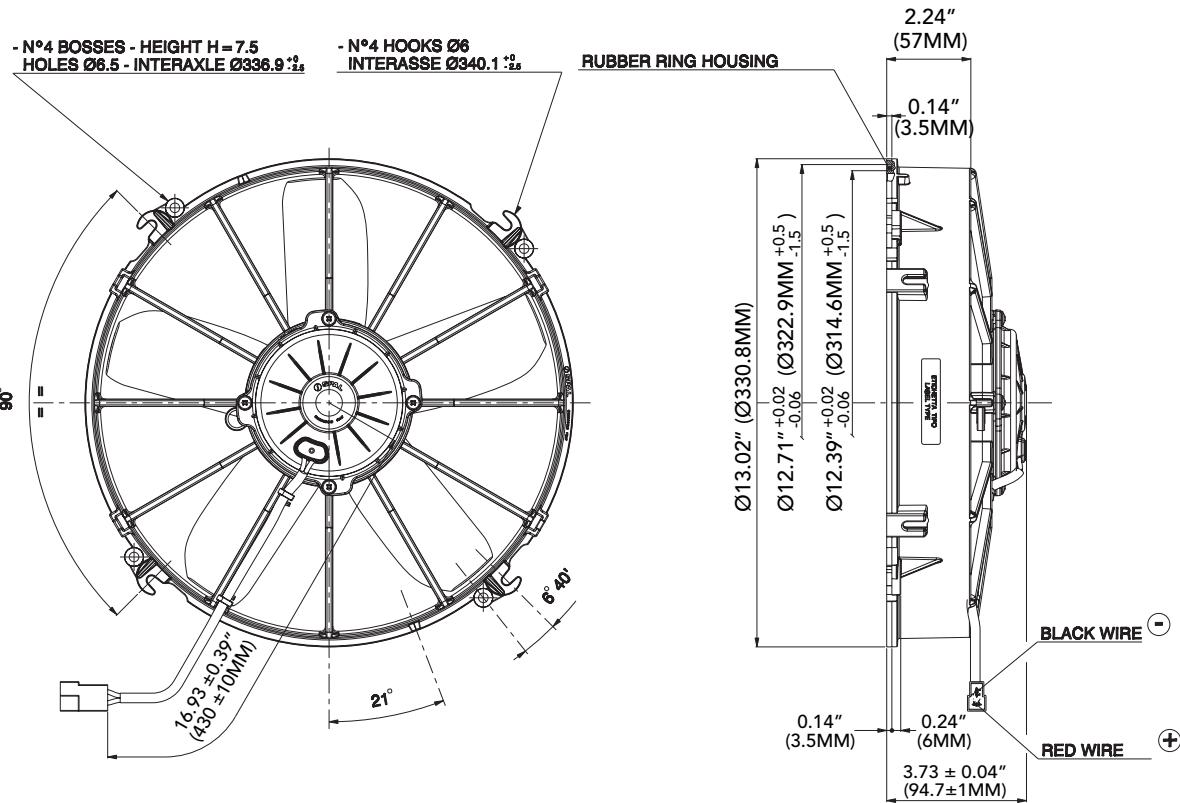

AMP connector Code 180908
AMP terminal Code 42098-2
Suggested mounting torque: 3(+1/-0) Nm with screw M5
Weight 2,35 Kg. approx.

Ø 305 mm
Ø 12"

suction				blowing			
Static pressure mm H ₂ O	Airflow m ³ /h	Current input A	Airflow CFM	Airflow m ³ /h	Current input A	Airflow CFM	Static pressure inH ₂ O
0	2780	13,9	1640	2860	13,9	1687	0
5	2490	15,2	1469	2560	14,8	1510	0,2
10	2120	16,0	1251	2280	15,8	1345	0,4
15	1600	15,9	944	1920	16,6	1133	0,6
20	1020	16,7	602	1360	17,1	802	0,8
25	730	18,0	431	890	17,8	525	1
30	510	18,9	301	500	18,5	295	1,2
35	160	20,5	94	0	21,0	0	1,4
40	0	21,8	0				1,6

PRODUCT FEATURES	
Waterproof motor, IP 68	✓
Long life	✓
VLL version*	✓
Waterproof connector	✓
Accessories: all the fixing kits	✓

* for OEM applications only. ✓ = Standard feature
✓ = Available upon request

Test voltage 13 V. d.c.