
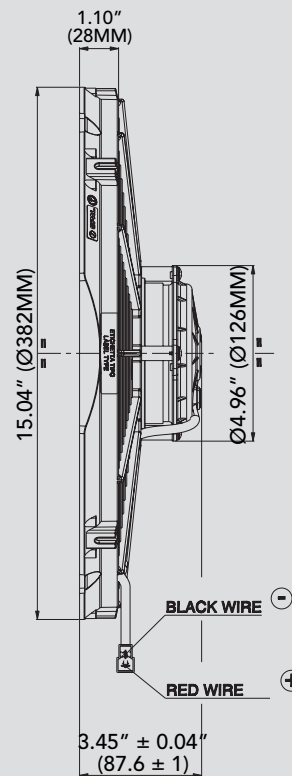


12V C.C. - D.C.

VA08-AP71/LL-53A
VA08-AP71/LL-53S

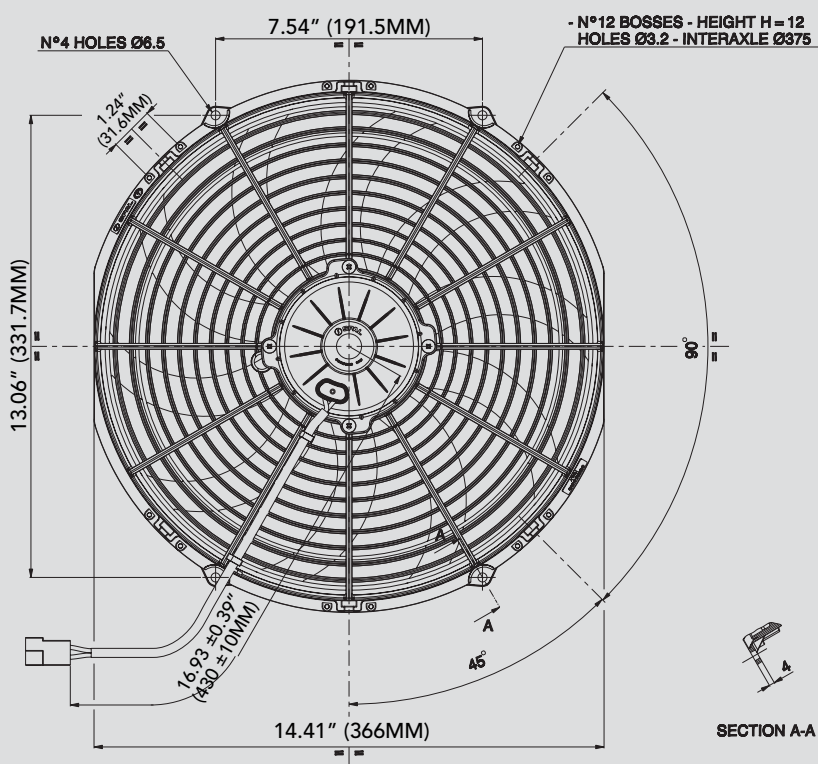

AMP connector Code 180908
AMP terminal Code 42098-2
Suggested mounting torque: 3(+1/-0) Nm with screw M5
Weight 2,35 Kg. approx.

Ø 350 mm

Ø 14"

suction

blowing

PRODUCT FEATURES

Static pressure mm H ₂ O	suction		blowing			Static pressure inH ₂ O	
	Airflow m ³ /h	Current input A	Airflow CFM	Airflow m ³ /h	Current input A		
0	3160	19,5	1864	3120	21,1	1841	0
2,5	2970	20,1	1752	2980	21,2	1758	0,1
5	2750	20,5	1623	2760	21,3	1628	0,2
7,5	2500	20,5	1475	2340	21,0	1381	0,3
10	2010	19,6	1186	2110	21,0	1245	0,4
12,5	1650	18,7	974	1.680	20,4	991	0,5
15	1380	19,1	814	1200	19,8	708	0,6
17,5	1050	19,8	620	310	19,9	183	0,7
20	820	21,1	484	390	20,5	230	0,8
22,5	420	21,4	248	0	20,8	0	0,9
25	0	21,5	0				1

Waterproof motor, IP 68



Low noise



Long life



VLL version*



Waterproof connector



Accessories: all the fixing kits



* for OEM applications only. ✓ = Standard feature

✓ = Available upon request

Test voltage 13 V. d.c.

Learn more about engine cooling on our website.