

SPEC-D *Turning*

2002-2004 ACURA RSX **PROJECTOR HEADLIGHTS** INSTALLATION INSTRUCTIONS



If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.
Please wear protection before you work on your vehicle.
An assistant is helpful when removing the front bumper.
Please be careful while working with the bumper or body part to avoid scratching.
Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

Trim Pad Remover

1/4" Drive Extensions (6 to 12 inches)

Phillips Screwdriver

1/2" Drive Ratchet

10mm Socket

If your Headlight is Halo type, you also need:

Wire Stripper

Wire Crimper

4 Blue Quick Splice Wire Connectors

4 Blue Male Quick Wire Connectors

4 Blue Female Quick Wire Connectors

2 Red Wires (8 inch)

2 Black Wires (8 inch)

Product Part Numbers:

2LHP-RSX02-TM

2LHP-RSX02JM-TM

2LHP-RSX02B-TM

2LHP-RSX02JMB-TM




2002-2004

ACURA RSX PROJECTOR HEADLIGHTS

INSTALLATION INSTRUCTIONS



If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.
Please wear protection before you work on your vehicle.
An assistant is helpful when removing the front bumper.
Please be careful while working with the bumper or body part to avoid scratching.
Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

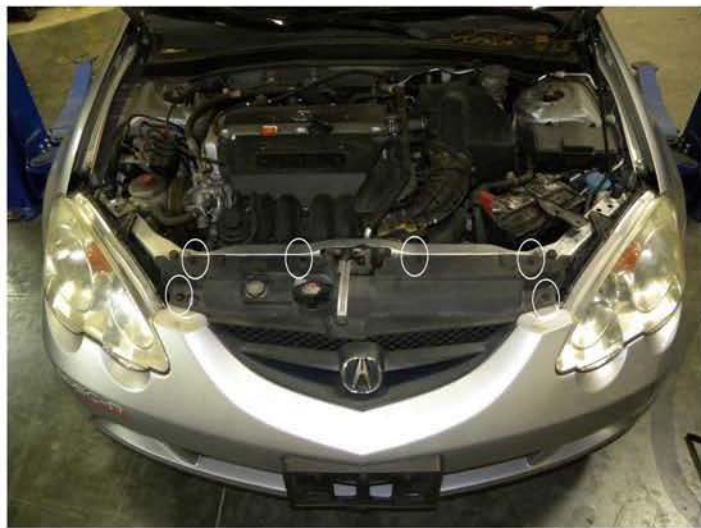

1. Remove six clips



2. Remove eight clips and four screws



3. Remove one screw



4. Pull out the bumper (Both side)



5. Remove the front bumper



6. Remove four 10mm headlight bolts around the headlight



7. Disconnect all the headlight harnesses



8. Remove the headlight



9. Remove the bracket from OEM the headlight



10. Remove two sockets from OEM the headlight



11. Install the bracket on the TM projector headlight



12. Install two sockets on the TM projector headlight



13. Connect all the headlight connectors
Please see the "Halo and L.E.D installation instructions"
If your headlights don't have HALO or L.E.D. You can skip this step



14. Install the headlight



15. Install four 10mm headlight bolts



16. Install the front bumper



17. Install one screw (BOTH SIDE)



18. Install eight clips and four screws



19. Install six clips



20. Please repeat the picture order from 1 to 19 for the opposition side



21. The installation is now complete

