

# SPEC-D *Turning*

## 2002-2003 SUBARU WRX **PROJECTOR HEADLIGHTS** INSTALLATION INSTRUCTIONS

\*If you experience any difficulties that the instructions did not cover, Please seek assistance at local automotive shop.

\*Please wear protection before you work on your vehicle.

\*An assistant is useful when removing the front bumper from your vehicle.

\*Please be cautious when working with the bumper or any parts belonging to the vehicles' body prevent scratching.

\*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



### TOOLS AND SUPPLIES REQUIRED

1/2" Drive Ratchet

Phillips Screwdriver

10mm Socket

Trim Pad Remover

Phillips Screwdriver

Trim Pad Remover

If your Headlight is Halo type, you also need:

Wire Stripper

Wire Cimper

4 Blue Quick Splice Wire Connectors

4 Blue Male Quick Wire Connectors

4 Blue Female Quick Wire Connectors

2 Red Wires (8 inch)

2 Black Wires (8 inch)

### Product Part Numbers:

LHP-WRX02JM-TM

LHP-WRX02-TM



## 2002-2003 SUBARU WRX PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

- \*If you experience any difficulties that the instructions did not cover, Please seek assistance at local automotive shop.
- \*Please wear protection before you work on your vehicle.
- \*An assistant is useful when removing the front bumper from your vehicle.
- \*Please be cautious when working with the bumper or any parts belonging to the vehicles' body prevent scratching.
- \*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



1. (4) plastic clips location



2. Remove the (4) plastic clips



3. (2) 10mm bolts location



4. Remove the (2) 10mm bolts



5. Remove the front grill




6. Remove the 10mm bolt



7. Remove the (2) 10mm bolts



8. Remove the headlight

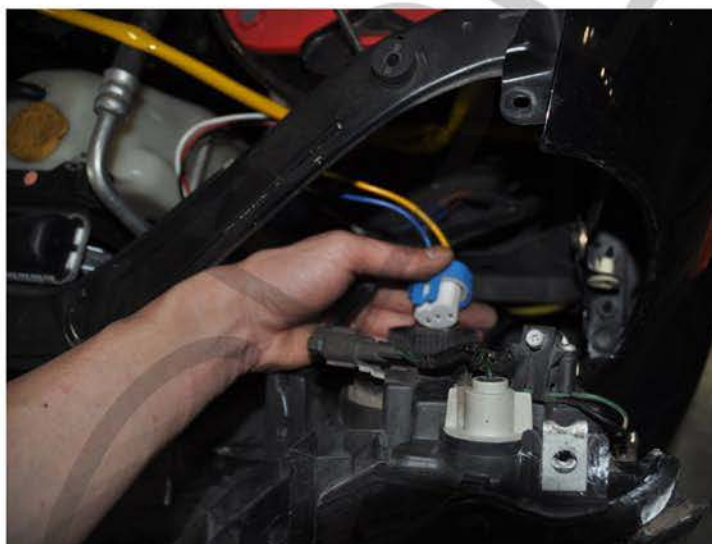

9. Disconnect the headlight harness



10. Disconnect the headlight harness



11. Remove the phillips head screw



12. Remove the headlight harness




13. Remove the headlight harness



14. Connect the headlight harness to the new light



15. Connect the light socket in the new light  
Please see the "Halo and L.E.D installation instructions"  
If your headlights don't have HALO or L.E.D. You can skip this step

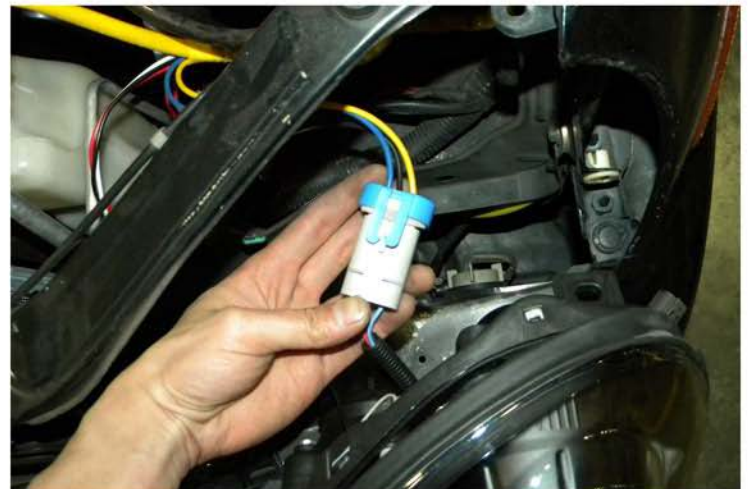

16. Connect the headlight harness to the new headlight



17. Place the new headlight in the stock location



18. Tighten the 10mm bolt



19. Tighten the (2) 10mm bolts



20. Replace the front grill



21. Replace the (4) plastic clips



22. Tighten the (2) 10mm bolts



23. The installation is now complete  
Please repeat the steps in order from 1 to 22 for the opposite side

