

SPEC-D *Tuning*

2007-2009 CHEVY AVALANCHE PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS



If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise. Please wear protection before you work on your vehicle.

An assistant is helpful when removing the front bumper.

Please be careful while working with the bumper or body part to avoid scratching.

Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

Trim Pad Remover

10mm Socket

If your Headlight is Halo type, you also need:

4 Blue Male Quick Wire Connectors

¼" Drive Ratchet

Wire Stripper

4 Blue Female Quick Wire Connectors

¼" Drive Extensions (4 to 6 inches)

Wire Crimper

2 Red Wires (8 inch)

7mm Socket

4 Blue Quick Splice Wire Connectors

2 Black Wires (8 inch)

Product Part Numbers:

2LHP-AVA07JM-TM

2LHP-AVA07B-TM

2LHP-AVA07-TM

2LHP-AVA07B-TM



2007-UP CHEVY AVALANCHE PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS



If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.
Please wear protection before you work on your vehicle.
An assistant is helpful when removing the front bumper.
Please be careful while working with the bumper or body part to avoid scratching.
Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



1. Open the hood first




2. Under the wall wheel , there are 2 screws and 2 clips need to be removed



3. After remove 4 clips, pull out the plastic cover slightly



4. There is one bolt need to be remove which is behind the plastic cover

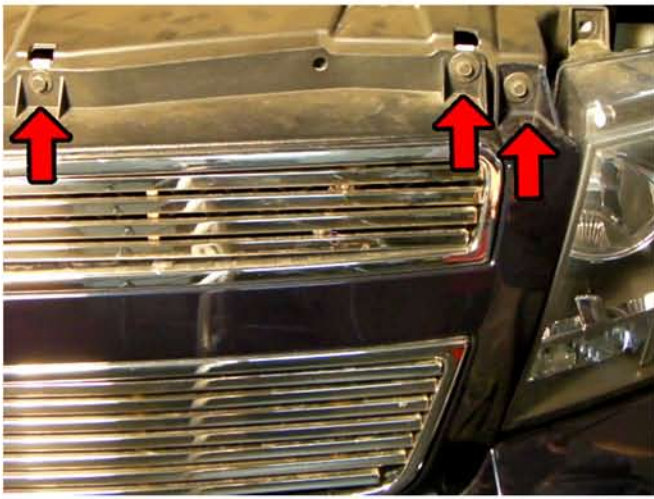

5. There are three bolts need to remove on the grill



6. There is one screw need to be remove which hidden in the front bumper



7. Remove two headlight screws



8. Gently pull out the headlights



9. Disconnect the hardness from headlights



10. Take out all original headlight harness from headlight and signal light and replace with new headlight harness



11. Connect with the new headlight harness



12. Connect all the connectors with vehicle
Please see the "Halo and L.E.D installation instructions"



13. Install the new headlight to the original spot




14. Install the two screws from the top of the headlight to fasten the new headlight



15. Install one screw which hidden in the front bumper



16. Install 1 bolt which is behind the plastic cover

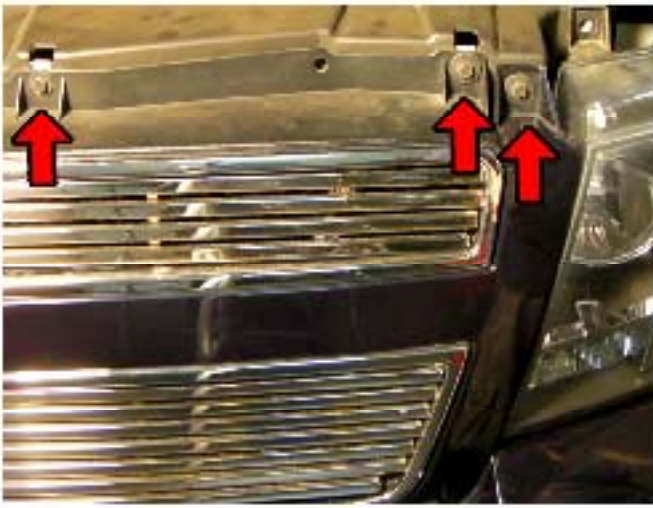

17. Install three screws from the top of the grill



18. Install the 2 screws and 2 clips, under the wall wheel



19. The installation now is complete
(please repeat the picture order from 1 to 18 for the opposite side)