

# Installation & CARE

## 2007-2011 HONDA CR-V PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

### BEFORE INSTALLATION :

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	Plastic Pry bar	10 mm socket	#1 Phillips head screwdriver
			

### PRODUCT NUMBER

2LHP-CRV07-TM  
2LHP-CRV07JM-TM  
2LHP-CRV07G-TM




### LET'S START THE INSTALLATION




**STEP 1**

Pull hood latch

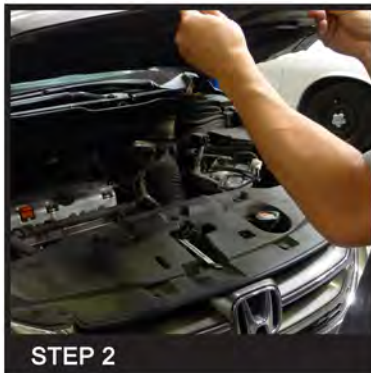

**STEP 2**

Raise hood

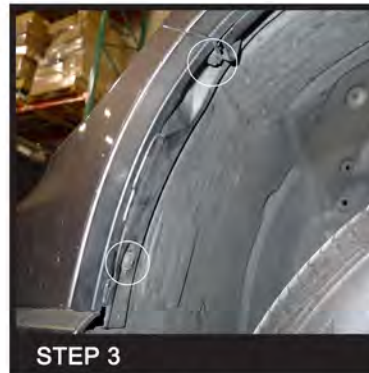

**STEP 3**

Remove two Phillip's head screws



**STEP 4**

Remove seven radiator cover fasteners



**STEP 5**

Remove radiator cover




**STEP 6**

Remove side cover fastener



**STEP 7**

Remove side cover

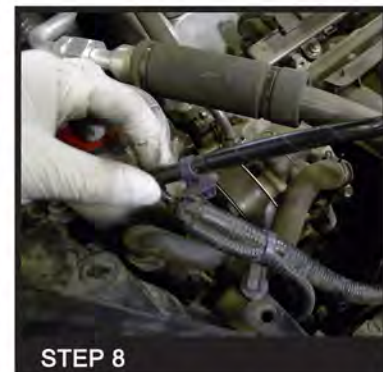

**STEP 8**

Disconnect all bulb connectors and disconnect wire harness clips from headlight



**STEP 9**

Disconnect four lower bumper fasteners



**STEP 10**

Reinstall radiator cover



**STEP 11**

Remove two wheel well inner screws and remove one bumper fastener



**STEP 12**

Remove bumper



**STEP 13**

Remove one front headlight fastener



**STEP 14**

Remove two top 10mm bolts



**STEP 15**

Remove one side 10mm bolt



**STEP 16**

Remove one 10mm front headlight bolt



**STEP 17**

Remove headlight housing




**STEP 18**

Remove one 10mm bolt to remove headlight bracket



**STEP 19**

Install one 10mm bolt to Install Headlight Bracket on Projector headlight

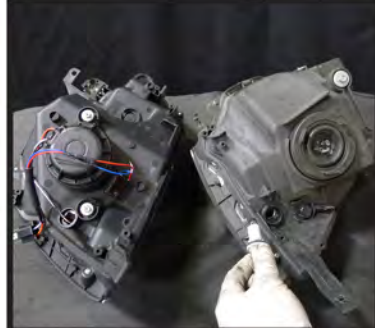

**STEP 20**

Remove parking light socket and bulb and install to new headlight



**STEP 21**

Reinstall front 10mm headlight bolt and one headlight fastener




**STEP 22**

Reinstall one side 10mm bolt



**STEP 23**

Reinstall two top 10mm bolts and reconnect all bulb connectors

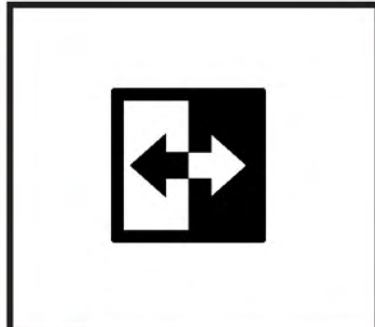

**STEP 24**

Repeat the step from 13-23 for opposite side




**STEP 25**

Reinstall bumper




**STEP 26**

Reinstall radiator cover

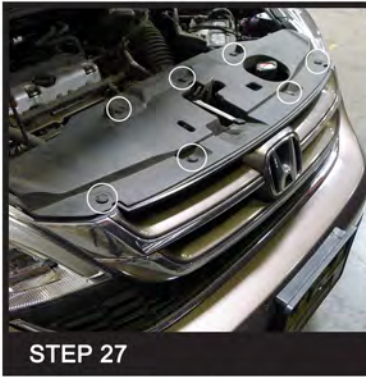


**STEP 27**

Reinstall seven cover fastener

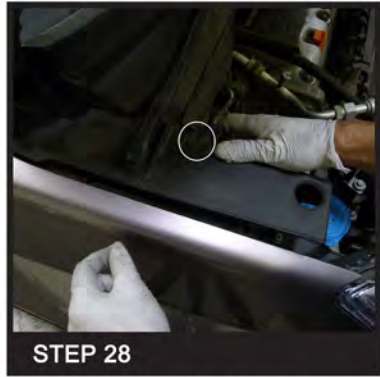

**STEP 28**

Reinstall side cover and fastener

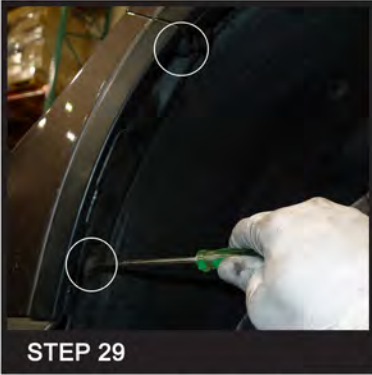


**STEP 29**

Reinstall two wheel well inner screws and reinstall one bumper fastener




**STEP 30**

Reinstall four lower bumper fasteners

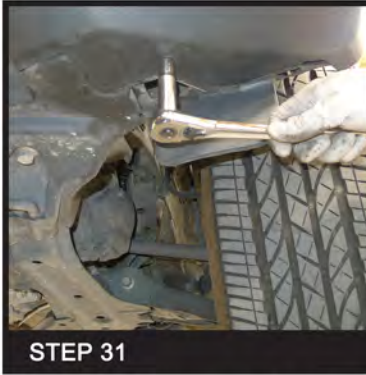

**STEP 31**

Reinstall one wheel well lining 10mm bolt per side

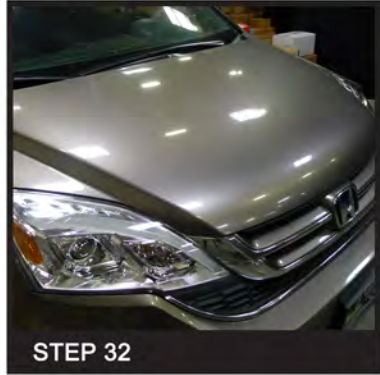

**STEP 32**

Close hood

## 2007-2011 HONDA CR-V PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTION

### BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

## 2007-2011 HONDA CR-V PROJECTOR HEADLIGHTS BACK VIEW

