

SPEC-D *Tuning*

2012-2013 HONDA CIVIC PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

1/2" Drive Ratchet
10mm Socket
7mm Socket
Trim Pad Remover

If your Headlight is Halo type, you also need:

Wire Stripper
Wire Crimper
4 Blue Quick Splice Wire Connectors
4 Blue Male Quick Wire Connectors
4 Blue Female Quick Wire Connectors
2 Red Wires (8 inch)
2 Black Wires (8 inch)

Product Part Numbers:

2LHP-CV12JM-8V2-TM

2LHP-CV12-8V2-TM

2LHP-CV12G-8V2-TM



2012 AND UP CIVIC 2DR 4DR PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop


Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

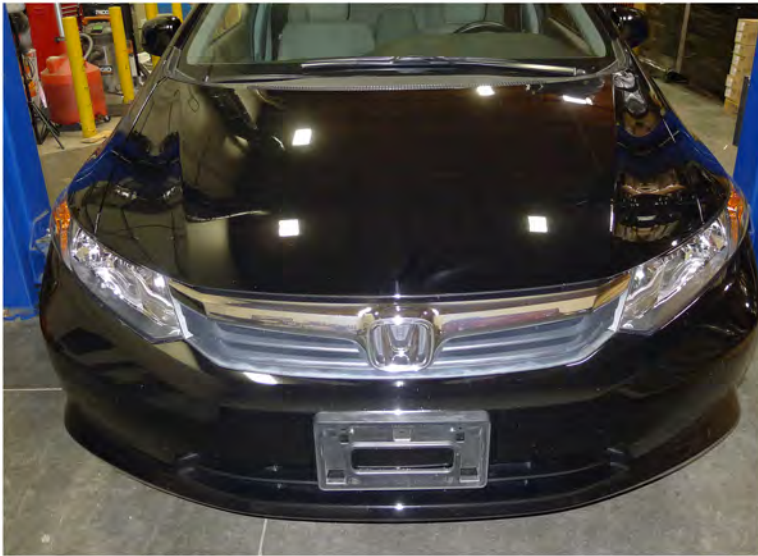

1. Before



2. (12) plastic clips location



4. Remove the (12) plastic clips



5. Remove the phillips head screw



5. (2) 5mm allen bolt location



6. Remove the (2) 5mm allen bolts



7. (2) plastic clips location




8. Remove the (2) plastic clips



9. Remove the front bumper



10. Remove the impact absorbing foam

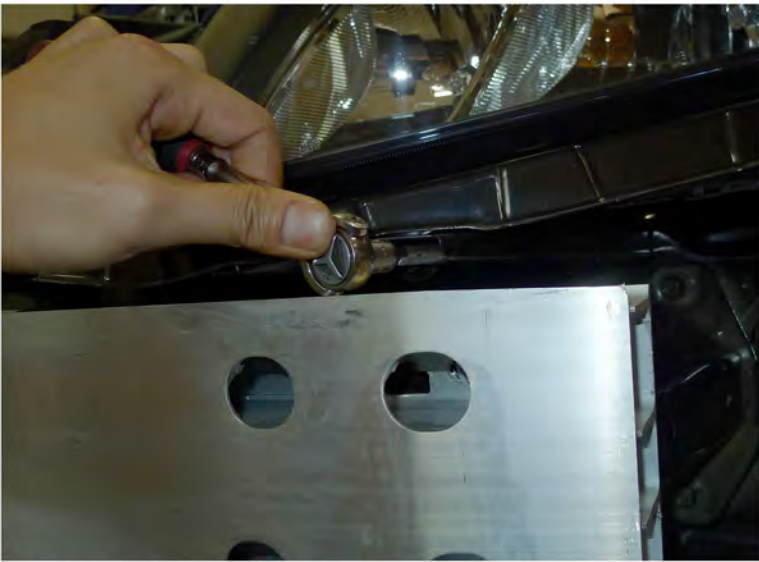


11. Remove the 10mm bolt



12. Remove the 10mm bolt



13. Remove the 10mm bolt

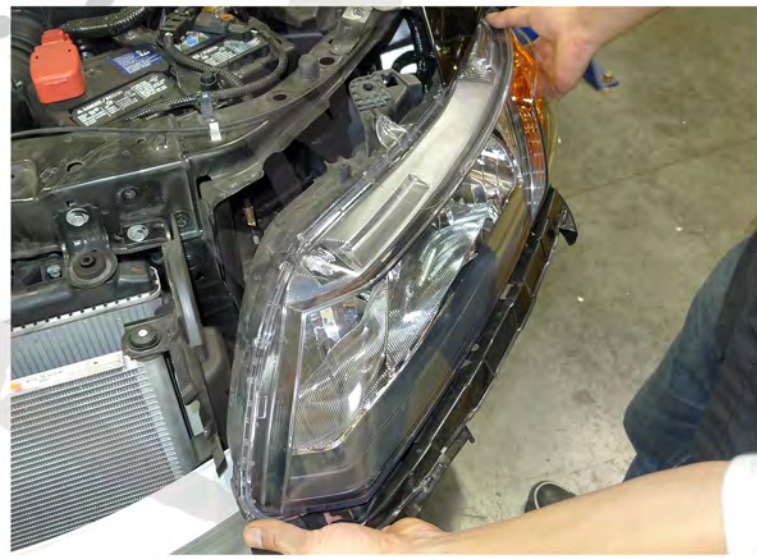


14. Remove the headlight



15. Disconnect the headlight harness



16. Disconnect the headlight harness

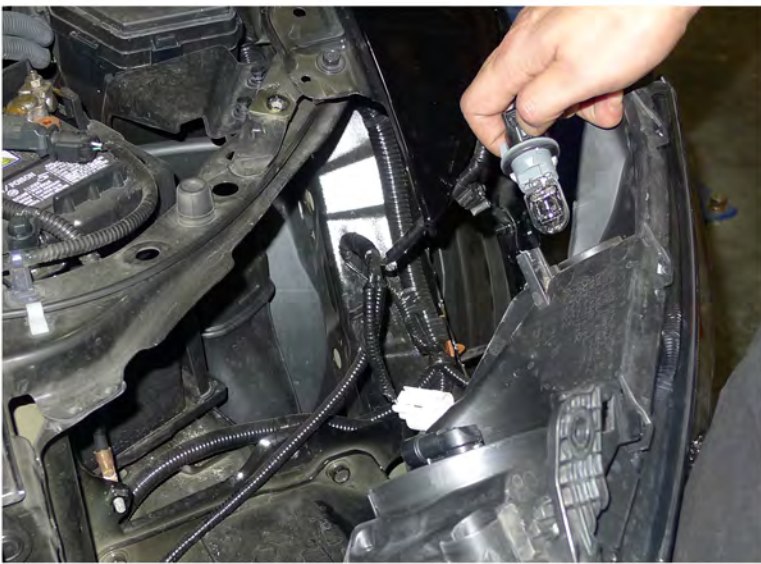

17. The 10mm bolt location



18. Remove the 10mm bolt



19. Remove the headlight bracket



20.. Install the headlight bracket on the new headlight



21. Connect the headlight harness to the new headlight
Please see the " L. E. D. headlights installation instructions"
If your headlights don't have L.E.D. You can skip the installation instruction.



22. Connect the headlight harness to the new headlight



23. Connect the headlight harness to the new headlight



24. Place the new headlight in the stock location



25. Tighten the 10mm bolt



26.. Tighten the 10mm bolt



27. Tighten the 10mm bolt



28. Replace impact absorber and place the front bumper



29. Replace the (2) 5mm allen bolts



30. Replace the (2) plastic clips



31. Replace the (2) phillips head screws



32. Replace the (12) plastic clips



33. Replace the (12) plastic clips
Please repeat the steps from 1 to 33 for the opposite side



34. The installation now is complete