

# INSTALLATION & CARE

## 2007-2014 GMC YUKON PROJECTOR HEADLIGHT INSTALLATION INSTRUCTION

### BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	10 mm Socket	7 mm Socket	6" Socket Extension
			
Plastic Fastener Remover			
			

### PRODUCT NUMBER

2LHP-DEN07-V2-TM  
2LHP-DEN07BK-V2-TM  
2LHP-DEN07JM-V2-TM



### LET'S START THE INSTALLATION



#### STEP 1

Remove the six 10mm bolts on top of the front grille



#### STEP 2

Remove the six clips and the 7mm bolt on the wheel fender liner



#### STEP 3

Remove the two 10mm front bumper mounting bolts



#### STEP 4

Remove the 10mm headlight bolt at the bottom of the headlight



#### STEP 5

Remove the two 10mm headlight bolts at the top of the headlight



#### STEP 6

Unseat the factory headlight housing



**STEP 7**

Disconnect the headlight harness and remove the factory headlight housing



**STEP 8**

Remove the headlight harness from the factory headlight housing



**STEP 9**

Remove the parking light bulb from the socket



**STEP 10**

Insert the parking light connector from the new headlight housing to the socket, (+) and (-) to (-)



**STEP 11**

Install the headlight harness to the new headlight housing



**STEP 12**

Connect the headlight harness




**STEP 13**

Seat the new headlight assembly in place



**STEP 14**

Reinstall the two 10mm headlight bolts at the top of the headlight

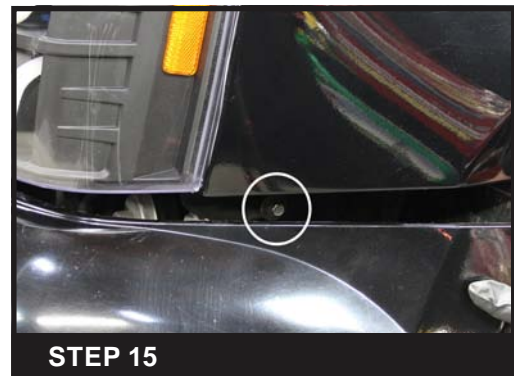


**STEP 15**

Reinstall the 10mm headlight bolt at the bottom of the headlight




**STEP 16**

Reinstall the two 10mm front bumper mounting bolts

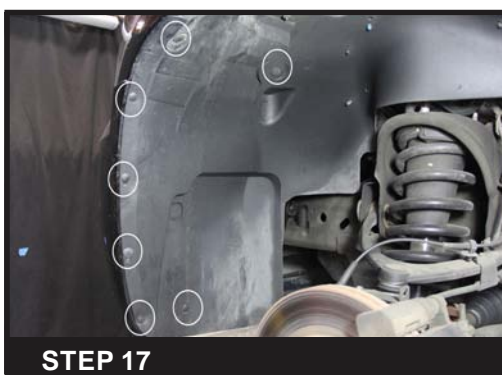

**STEP 17**

Reinstall the six clips and the 7mm bolt on the wheel fender liner

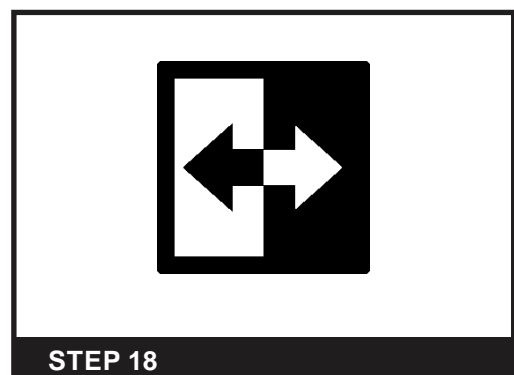

**STEP 18**

Please repeat the steps from 2 to 17 for the opposite side



**STEP 19**

Reinstall the six 10mm bolts on top of the front grille



**STEP 20**

Close the hood to complete the installation




## 2007-2014 GMC YUKON PROJECTOR HEADLIGHT INSTALLATION INSTRUCTION

### BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

## 2007-2014 GMC YUKON PROJECTOR HEADLIGHT INSTALLATION INSTRUCTION

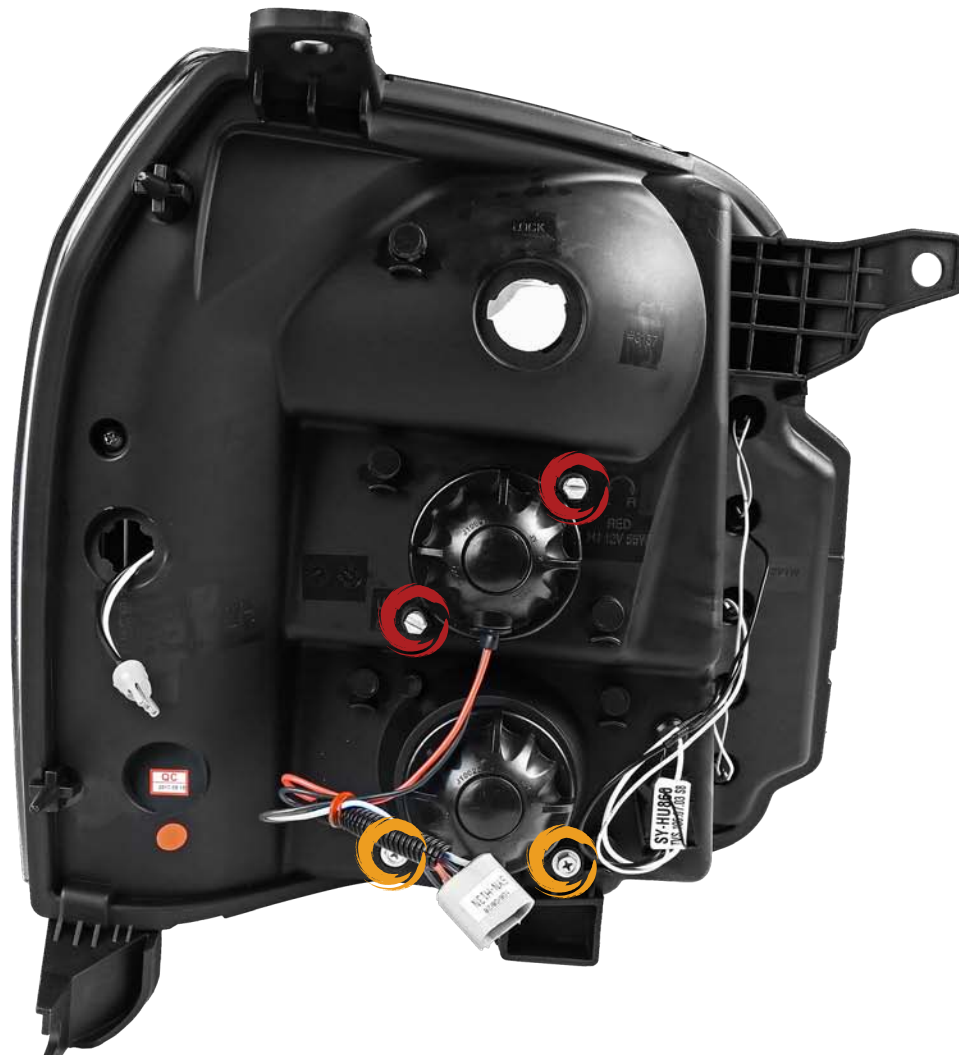

LOW BEAM ADJUSTER



HIGH BEAM ADJUSTER