

# SPEC-D *Tuning*

## 1999-2004 FORD F250 PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED



Phillips Screwdriver



Needle Nose Pliers

If your Headlight is Halo type, you also need:



Wire Stripper



Wire Crimper



4 Blue Quick Splice Wire Connectors



4 Blue Male Quick Wire Connectors



4 Blue Female Quick Wire Connectors



2 Red Wires (8 inch)



2 Black Wires (8 inch)

### Product Part Numbers:

2LHP-F25099BK-TM

2LHP-F25099JM-TM

2LHP-F25099G-TM

2LHP-F25099-TM





# 1999-2004 FORD F250 PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.



1. Before



2. Phillips head screw location



3. Remove the (2) phillips head screws



4. Remove the bumper corner light






5. Remove the light socket



6. Remove the light socket

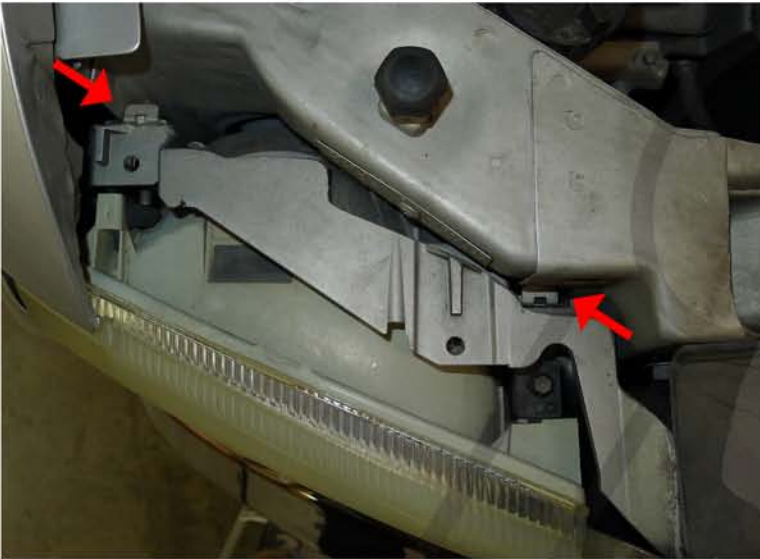

8. (2) metal retaining clip location



9. Remove the (2) metal clips



10. Remove the headlight



10. Remove the headlight bulb and harness





11. Connect the headlight harness to the new headlight

Please see the " HALO and L. E. D. head lights installation instructions"  
If your head lights don't have HALO and L.E.D. You can skip the installation instruction.



12. Install the light socket



13. Install the light sockets



14. Place the new headlight in the stock location



15. Install the metal retaining clip



16. Tighten the (2) phillips head screws



17. Tighten the (2) phillips head screws  
Please repeat the steps from 1 to 17 for the opposite side



18. The installation is now complete

SPEC  
TUNING