

INSTALLATION & CARE

SPEC-D
Tuning

INNOVATE

PROFESSIONAL

SERVICE

2015-2018 FORD FOCUS PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

3/4" Ratchet	ST20 Torx 3/4" Bit Socket		
			

PRODUCT NUMBER

2LHP-FOC15-SQ-TM
2LHP-FOC15JM-SQ-TM
2LHP-FOC15BK-SQ-TM
2LHP-FOC15G-SQ-TM




LET'S START THE INSTALLATION



Remove the two T30 torx screws



Unseat the factory headlight housing

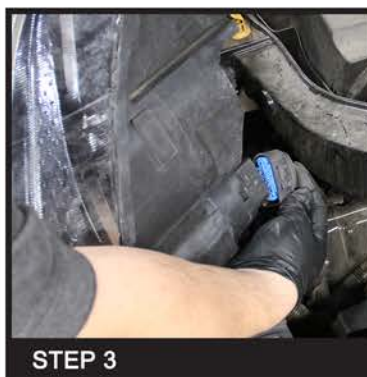

Disconnect the headlight harness and
remove the factory headlight housing



Connect the new headlight harness



Seat the new headlight assembly in
place



Reinstall the two T30 torx screws



Please repeat the steps from 1 to 6 for
the opposite side



Close the hood to complete the
installation

INSTALLATION & CARE

SPEC-D
Tuning

INNOVATE

PROFESSIONAL

SERVICE

2015-2018 FORD FOCUS PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

2015-2018 FORD FOCUS PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS



LOW BEAM ADJUSTER



HIGH BEAM ADJUSTER