

SPEC-D *Tuning*

1999-2005 PONTIAC GRAND-AM HEADLIGHTS INSTALLATION INSTRUCTIONS



- *If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.
- *Please wear protection before you work on your vehicle.
- *An assistant is helpful when removing the front bumper.
- *Please be careful while working with the bumper or body part to avoid scratching.
- *Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

Phillips Screwdriver	4 Blue Quick Splice Wire Connectors	Dremel Rotary Tools
Trim Pad Remover	4 Blue Male Quick Wire Connectors	
Flat Tip Screwdriver	4 Blue Female Quick Wire Connectors	
Pliers	2 Red Wires (8 inch)	
Wire Crimper	2 Black Wires (8 inch)	
Wire Stripper	Drill with 3/8 Drill Bit	

Product Part Numbers:

2LHP-GAM99JM-TM
2LHP-GAM99-TM
2LHP-GAM99JMB-TM
2LHP-GAM99B-TM



PONTIAC GRAND-AM HEADLIGHTS INSTALLATION INSTRUCTIONS

*If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.




*Please wear protection before you work on your vehicle.

*An assistant is helpful when removing the front bumper.

*Please be careful while working with the bumper or body part to avoid scratching.

*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

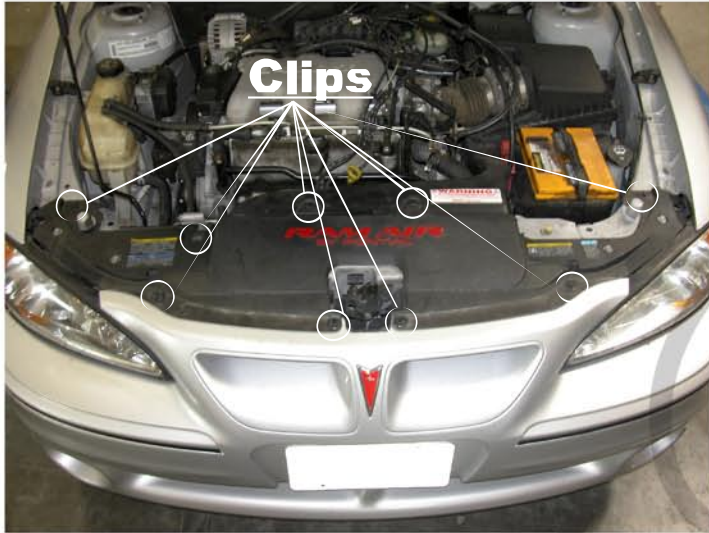

1. Open the hood



2. Remove the clips



3. Then remove the plastic cover



4. There are two latches



5. Pull the inner latch out first



6. Then pull the outer latch up




7. Gently pull out the headlight slightly, just enough to see the back of the light



8. Disconnect all the connectors and remove the headlight



9. After you remove the headlight, it should look the same as the picture shown above

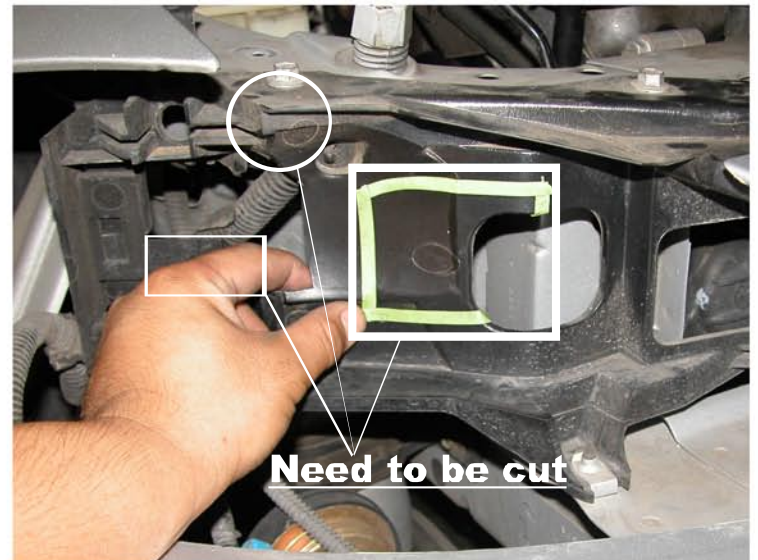

10. These locations need slight modification by cutting out the area shown above



17. After you modify the area, it should look same as the picture shown above



18. Connect the harness from the headlight please see the "Halo and L.E.D. installation instructions" If your headlights don't have HALO or L.E.D. You can skip the installation instructions.



19. Gently install the headlight to its original spot



20. Push the outer latch back into place



21. Then push the inner latch back into place



22. Gently put the plastic back
(Please repeat the picture order from 1 to 22 for the opposite side)



23. The installation is now complete

SPEC TUNING