

# Installation & CARE

## 1999-2004 JEEP GRAND CHEROKEE HALO LED PROJECTOR HEADLIGHTS

### BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED


1/4" Ratchet	6" Extension	7mm Socket	Handy Remover
			

### PRODUCT NUMBER

2LHP-GKEE99JM-TM  
2LHP-GKEE99G-TM  
2LHP-GKEE99-TM



### LET'S START THE INSTALLATIONS

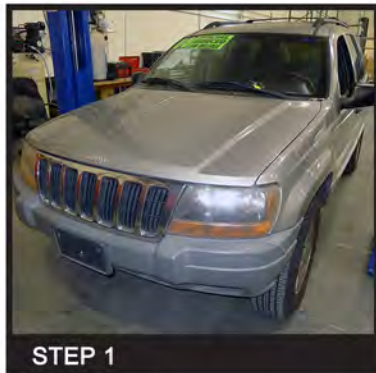


**STEP 1**

Before installation



**STEP 2**

Remove the 7mm bolt

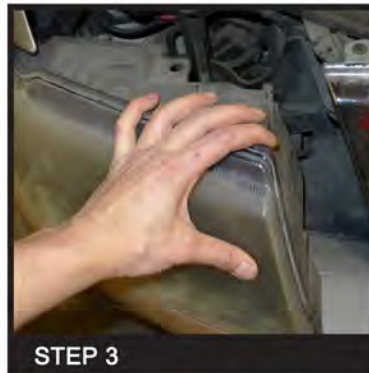

**STEP 3**

Pull forward to remove the headlight




**STEP 4**

Disconnect the headlight harness




**STEP 5**

Disconnect the headlight harness

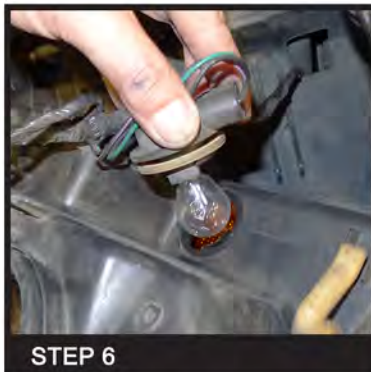


**STEP 6**

Remove the light sockets

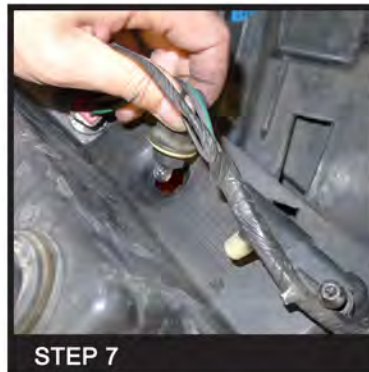

**STEP 7**

Remove the light sockets

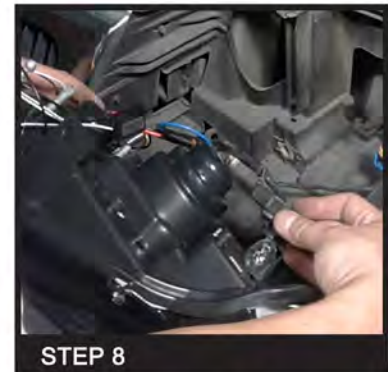

**STEP 8**

Install the light sockets to the new headlight



**STEP 9**

Install the light sockets to the new headlight



**STEP 10**

Connect the headlight harness. Please see the "Halo & LED headlights installation instructions" If your headlights don't have Halo and led, you can skip the instruction



**STEP 11**

Connect the headlight harness



**STEP 12**

Press the headlight into the position



**STEP 13**

Secure the headlight with the 7mm bolt



**STEP 14**

Please repeat the steps from 1 to 13 for the opposite side



**STEP 15**

The installation now is complete