

# SPEC-D *Tuning*

## 1997-2003 CHEVY MALIBU PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS



\*If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.

\*Please wear protection before you work on your vehicle.

\*An assistant is helpful when removing the front bumper.

\*Please be careful while working with the bumper or body part to avoid scratching.

\*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED



\*Pliers



\*Flat-tip screwdriver



\*Diagonal cutter

### Product Part Numbers:

2LHP-MBU99JM-TM

2LHP-MBU99-TM



### CHEVY MALIBU PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

\*If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.



\*Please wear protection before you work on your vehicle.

\*An assistant is helpful when removing the front bumper.

\*Please be careful while working with the bumper or body part to avoid scratching.

\*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



1. Remove the bolt and pull out the clip from the top of the headlight



2. Remove the plastic from top of the headlight shielding



3. There are two clips that need to be pulled out



4. Pull out the outer clip




5. Then pull out the inner clip



6. Gently pull out the OEM headlight slightly, just enough to see the back of the light



7. Disconnect all the connector and remove all the socket from OEM headlight

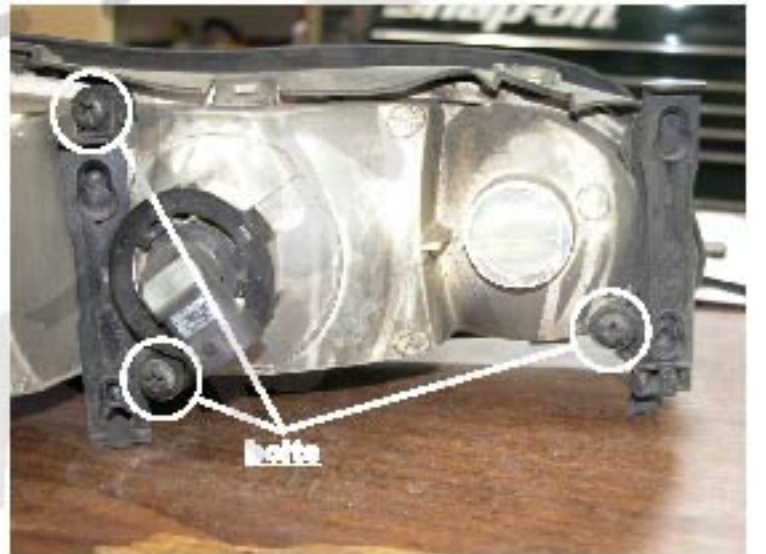

8. After you disconnect all the connectors from the headlight, it should look the same as the picture shown above, also there are three bolts in the back of the headlight



9. Remove the bolts from one side



10. Then remove the bolts from the other side



11. Take out the brackets from headlight



12. Install the brackets on the new headlight



13. Remove the light bulb from the socket



14. Plug the the connector into the socket from the vehicle



15. Connect the connector from the vehicle  
please see the "Halo and L.E.D. installation instructions"  
if your headlights don't have HALO or L.E.D. You can skip the installation instructions.



16. Gently install the projector headlight to its original spot



17. Push all the clips back to fasten the headlight  
(Please repeat the picture order from 1 to 17 for the opposite side)



18. The installation is now complete

SPEC TUNING