

# Installation & CARE

## 2007-2012 MINI COOPER VERSION 2 PROJECTOR HEADLIGHTS INSTALLATION

### BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

¼" Ratchet	10 mm socket		
			

### PRODUCT NUMBER

2LHP-MINI06JM-V2-TM  
2LHP-MINI06G-V2-TM  
2LHP-MINI06-V2-TM



### LET'S START THE INSTALLATIONS



STEP 1

Remove (2) 10mm bolts




STEP 2

Remove (2) 10mm bolts



STEP 3

Disconnect the headlight harness

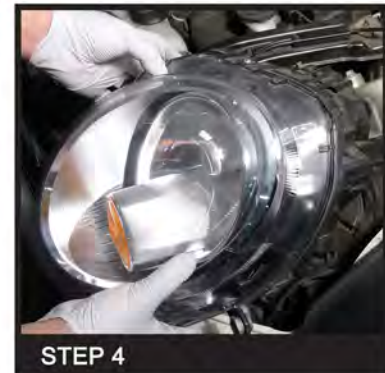

STEP 4

Remove the headlight housing



STEP 5

Different length bolt sleeve for the top mounting tab



STEP 6

Identify the bolt sleeve location



STEP 7

Install the bolt sleeve which matching the top mounting bolt length



STEP 8

Ensure quick disconnects are secured on the pictured wires. Please see the HALO & LED headlights installation instructions" If your head lights don't have HALO&LED You can skip the installation instruction.



**STEP 9**

Add the Quick Disconnects to pictured wires (White+Blue) (Black+Brown)



**STEP 10**

Zoomed in - (White+Blue) (Black+Brown)



**STEP 11**

Connect wires - (Green+White) (Black+Black)



**STEP 12**

Attach the headlight harness



**STEP 13**

Put the headlight housing in the place




**STEP 14**

Secure (2) 10mm bolts



**STEP 15**

Secure (2) 10mm bolts

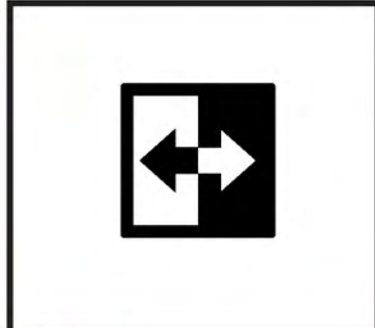

**STEP 16**

Please repeat the steps from 1 to 15 for the opposite side



**STEP 17**

The installation is now complete