

# SPEC-D *Tuning*

## 1994-1998 FORD MUSTANG PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

¼" Drive Ratchet

10mm Socket

Needle Nose Pliers

If your Headlight is a Halo type, you will also need:

Wire Stripper

Wire Crimper

4 Blue Quick Splice Wire Connectors

4 Blue Male Quick Wire Connectors

4 Blue Female Quick Wire Connectors

2 Red Wires (8 inch)

2 Black Wires (8 inch)

### Product Part Numbers:

2LHP-MST94-TM

2LHP-MST94JM-TM



## 1994-1998 FORD MUSTANG PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS



If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.  
Please wear protection before you work on your vehicle.  
An assistant is helpful when removing the front bumper.  
Please be careful while working with the bumper or body part to avoid scratching.  
Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



1. 10mm nut location



2. Remove the 10mm nut



3. Remove the corner light




4. Remove the light bulb socket





5. Mounting clips location

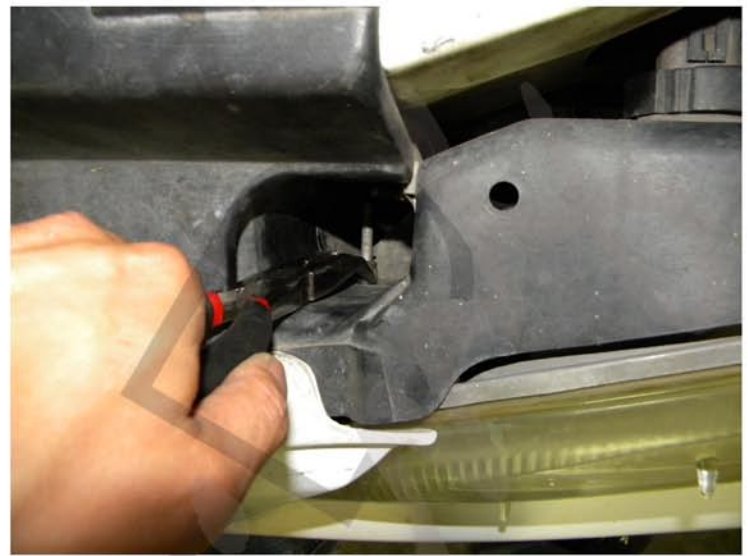

6. Detach the clips



7. Remove the headlight housing



8. Remove the headlight bulb and harness



9. Install the corner light into the projector headlight  
please see the "Halo and L.E.D installation instruction"  
If your headlights don't have HALO or L.E.D. You can skip the installation instruction.



10. Connect the projector headlights into the headlight harness





11. Press firmly to snap the headlight into position



12. Please repeat the steps in order from 1 to 11 for the opposite side



13. The installation is now complete

