

INSTALLATION & CARE

2006-2008 DODGE RAM PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

¼" Ratchet	¼" Drive Extension	10 mm Socket	Plastic Pry bar
			

PRODUCT NUMBER

2LHP-RAM06-G2-TM
2LHP-RAM06BK-G2-TM

2LHP-RAM06JM-G2-TM
2LHP-RAM06G-G2-TM



LET'S START THE INSTALLATION



STEP 1

Remove the rubber grommets on the wheel well



STEP 2

Remove the 10mm headlight mounting nut



STEP 3

Remove the two 10mm headlight mounting bolts from the side of the grille



STEP 4

Unseat the factory headlight housing



STEP 5

Disconnect the headlight harness and remove the factory headlight housing




STEP 6

Remove the signal light bulb from the light socket



STEP 7

Connect the connector to the signal light socket

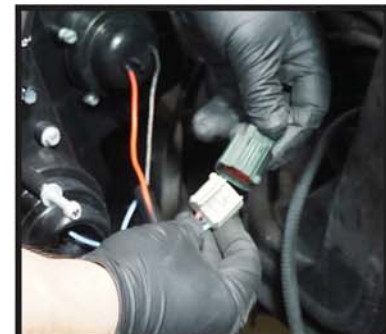

STEP 8

Connect the headlight harness



STEP 9

Seat the new headlight assembly in place



STEP 10

Reinstall the two 10mm headlight mounting bolts at the side of the grille




STEP 11

Reinstall the 10mm headlight mounting nut



STEP 12

Reinstall the rubber grommets on the wheel well

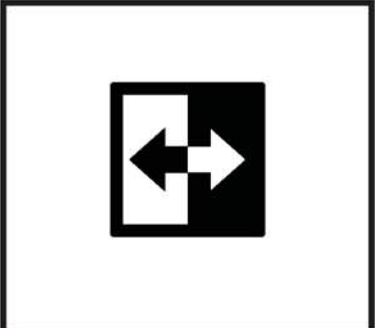

STEP 13

Please repeat the steps from 1 to 12 for the opposite side



STEP 14

Close the hood to complete the installation



INSTALLATION & CARE

2006-2008 DODGE RAM PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

2006-2008 DODGE RAM PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS



-  **LOW BEAM ADJUSTER**
-  **HIGH BEAM ADJUSTER**

