

SPEC-D *Tuning*

2003-2005 CHEVY SILVERADO 1PC PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

 Trim Pad Remover

If your Headlight is Halo type, you also need:

 Wire Stripper

Wire Stripper

 Wire Crimper


Wire Crimper

4 Blue Quick Splice Wire Connectors



4 Blue Male Quick Wire Connectors



 4 Blue Female Quick Wire Connectors

 2 Red Wires (8 inch)

 2 Black Wires (8 inch)

Product Part Numbers:

2LHP-SIV03JM-RS

2LHP-SIV03-RS

2LH-SIV03JM-RS

2LH-SIV03-RS

2LH-SIV03JM-ABM

2LH-SIV03-ABM

2LHP-SIV03JM-ABM

2LHP-SIV03-ABM



2003-2005 CHEVY SILVERADO 1PC PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.



1. Before



2. (7) plastic clips location



3. Remove (7) plastic clips



4. Remove the plastic cover




5. Headlight locking pin



6. Remove the headlight locking pin



7. Remove the headlight

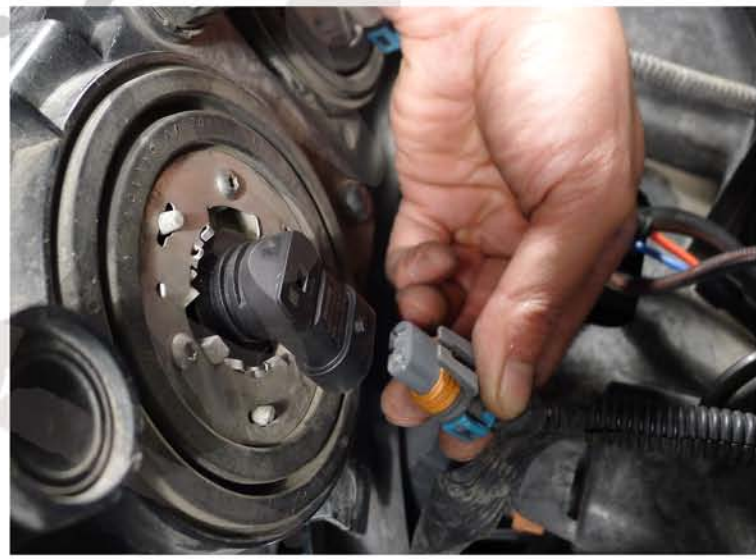

8. Disconnect the headlight harness



9. Release the bumper light mounting tab



10. Remove the bumper light



11. Remove the bumper light sockets



12. Release the (6) grill mounting clips



13. Release the (6) grill mounting clips




14. Release the (6) grill mounting clips



15. Release the (6) grill mounting clips



16. Release the (6) grill mounting clips

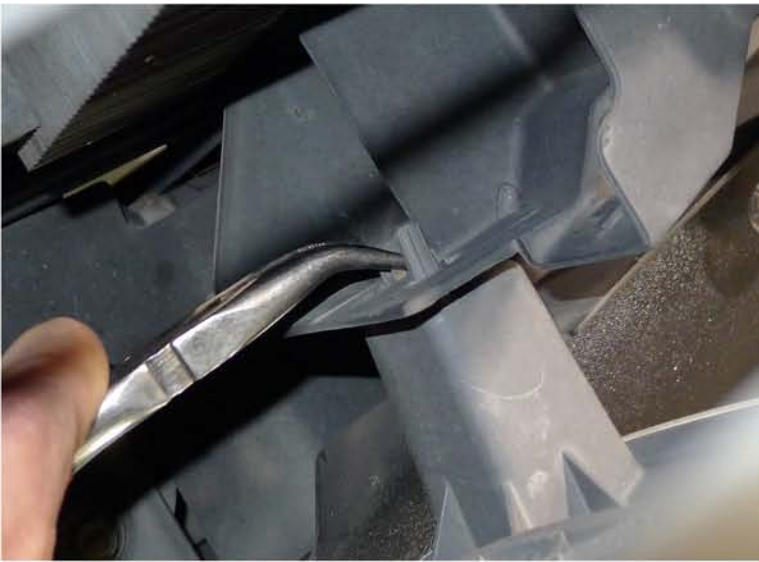

17. Release the (6)grill mounting clips



18. Remove the front grill



19. Install the bumper light socket into the new headlight



20. Connect the headlight harness to the new headlight
Please see the " Halo and L. E. D. headlights installation instructions"
If your headlights don't have Halo and L. E. D. You can skip the installation instruction.



21. Position the 1 peice headlight



22. Install the headlight locking pin



23. Install « front grill



24. Replace « plastic over



25. Replace the (7) plastic clips



26. Replace the (7) plastic clips



27. The installation now is complete