



- *If you experienced any difficulties that the instruction did not cover, Please seek local auto shop for advise.
- *Please wear protection before you work on your vehicle.
- *An assistant is helpful when removing the front bumper.
- *Please be careful while working with the bumper or body part to avoid scratching.
- *Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED







General 3RD BRAKE LIGHT

INSTALLATION INSTRUCTION

 \bigwedge

- *If you experienced any difficulties that the instruction did not cover, Please seek local auto shop for advise.
- *Please wear protection before you work on your vehicle.
- *An assistant is helpful when removing the front bumper.
- *Please be careful while working with the bumper or body part to avoid scratching.
- *Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.




1. Remove both screws inside the ceiling of the vehicle (It is a sample)




2. Carefully loosen the OEM 3rd brake light from the roof of the vehicle



3. Pull out the OEM 3rd brake light

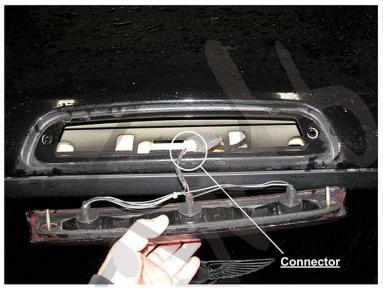

 After you pull out the 3rd brake light, you will see all the wires and connector harnesses

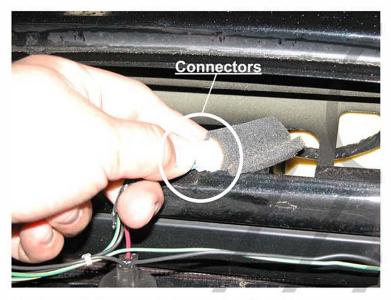

5. Disconnect the connector harness from the vehicle



7. Plug the connector harness with the new 3rd brake light



9. The installation is now complete



6. Bring out the new 3rd brake light



8. Reinstall both screws inside the ceiling of the vehicle (It is a sample)