

SPEC-D *Tuning*

2006-2009 FORD FUSION PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

Phillips Screwdriver	11mm Socket
Trim Pad Remover	¼" Ratchet
6" Extension	
7mm Socket	

If your Headlight is Halo type, you also need:	4 Blue Male Quick Wire Connectors
Wire Stripper	4 Blue Female Quick Wire Connectors
Wire Crimper	2 Red Wires (8 inch)
4 Blue Quick Splice Wire Connectors	2 Black Wires (8 inch)

Product Part Numbers:

LHP-FUS06JM-TM

LHP-FUS06-TM



2006-2009 FORD FUSION PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.


Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.




1. (10) 11mm bolts location




2. Remove the (10) 7mm bolts

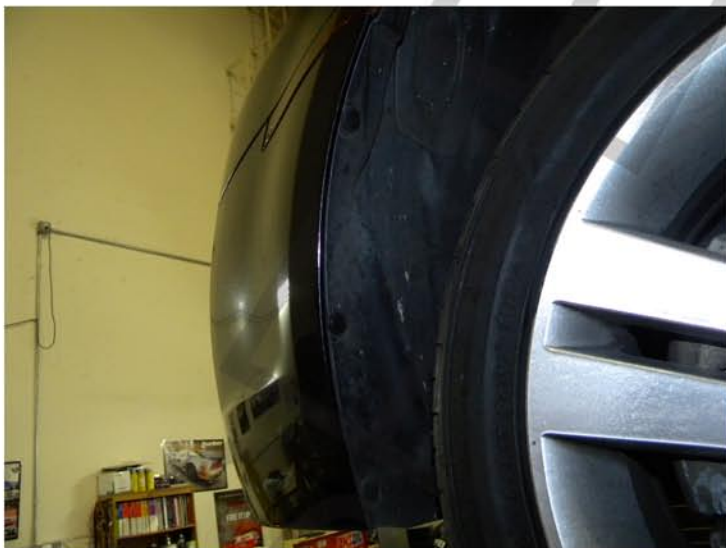

3. (3) plastic clips location

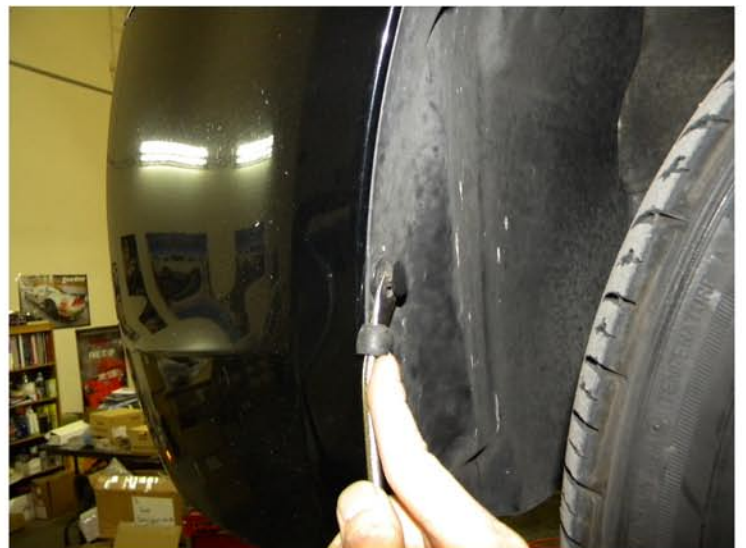

4. Remove (3) plastic clips

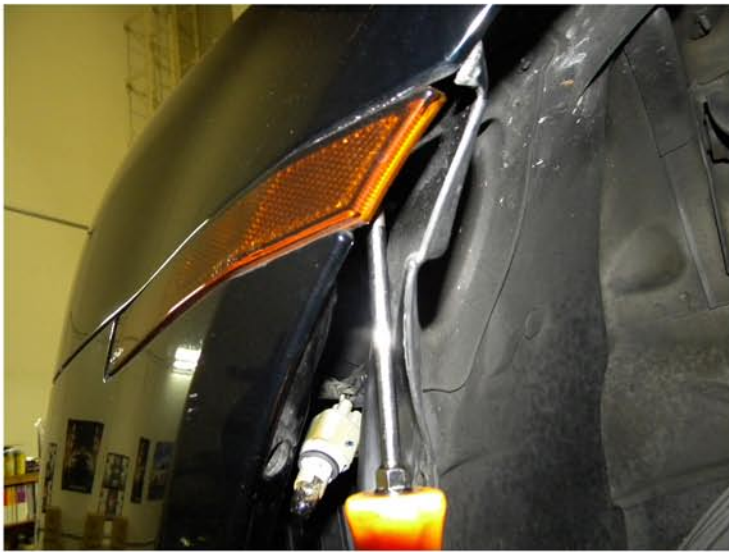

5. Remove the phillips head screw



6. (2) 11mm bolts and (2) plastic clips locations



7. Remove the (2) plastic clips



8. Unplug the fog light harness



9. Remove the front bumper



10. 11mm bolt location



11. (2) 11mm bolts and plastic clip locations



12. Remove the (2) 11mm bolts



13. Remove the plastic clip



14. 11mm bolt location



15. Remove the 11mm bolt



16. Pull out the headlight



17. Unplug the headlight harness




18. Unplug the light socket



19. Plug in the headlight harness into the new headlight
Please see the Halo and L.E.D installation instructions
If your headlights don't have HALO or L.E.D. You can skip it



20. Plug in the light socket

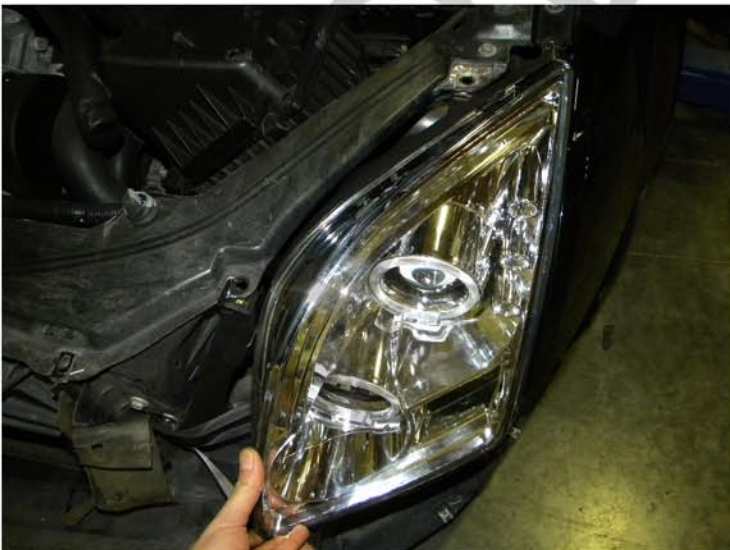

21. Place the new light in the stock location



22. Tighten the (2) 11mm bolts



23. Replace the plastic clip



24. Tighten the 11mm bolt



25. Tighten the 11mm bolt



26. Plug in the fog light harness




27. Replace the front bumper



28. Tighten the (2) 11mm bolts



29. Replace the (2) plastic clips

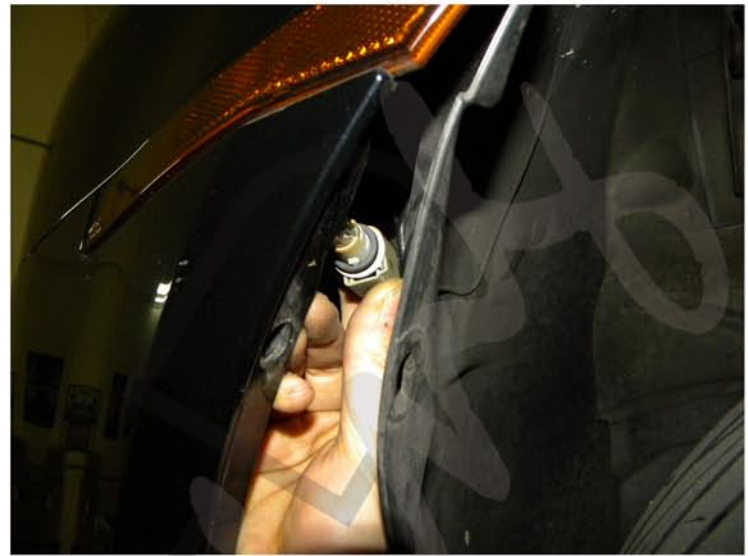


30. Plug the in bumper light socket



31. Tighten the phillips head screw



32. Replace the (3) plastic clips

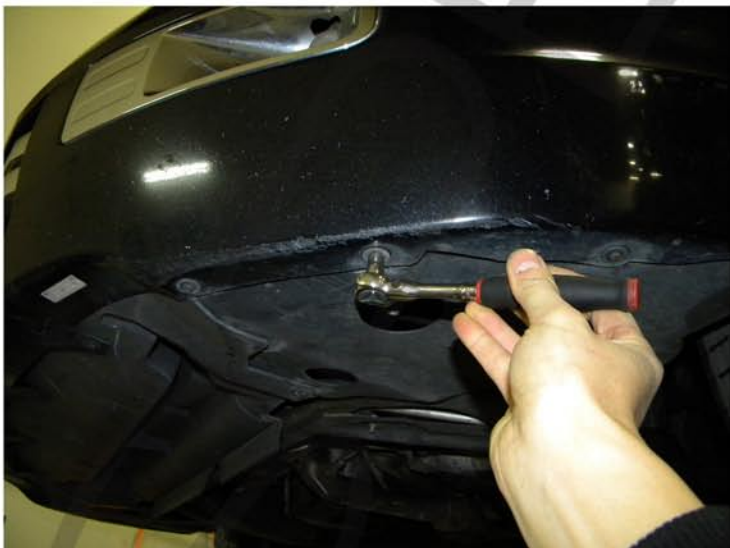

33. Replace the (10) 7mm bolts
Please repeat the steps in order from 1 to 33 for
the opposite side



34. The installation is now complete