

SPEC-D *Tuning*

2008-2009 PONTIAC G8 PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.


Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED



If your Headlight is Halo type, you also need:

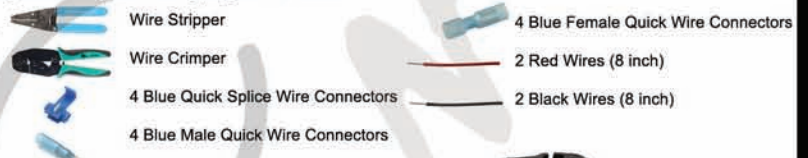

Product Part Numbers:

LHP-G808JM-TM

LHP-G808G-TM

LHP-G808-TM



2008-2009 PONTIAC G8 PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.




An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.



1. Before

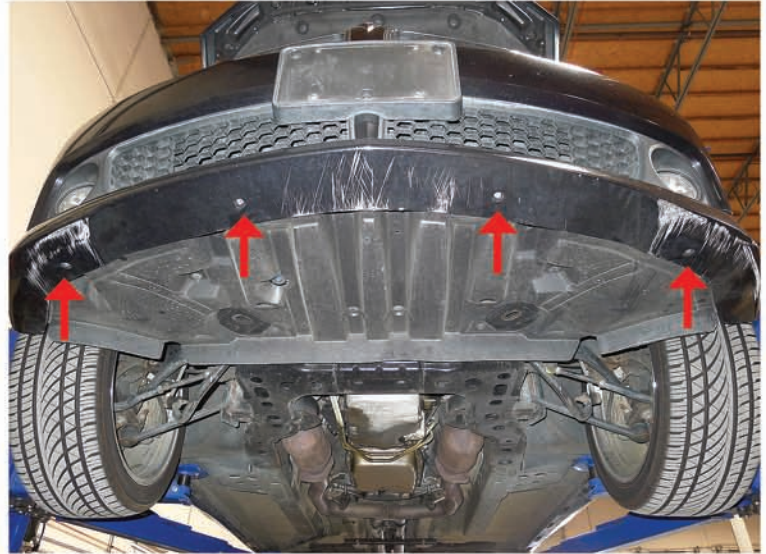


2. (4) 7mm bolts location



3. Remove the (4) 7mm bolts



4. (2) plastic clips location

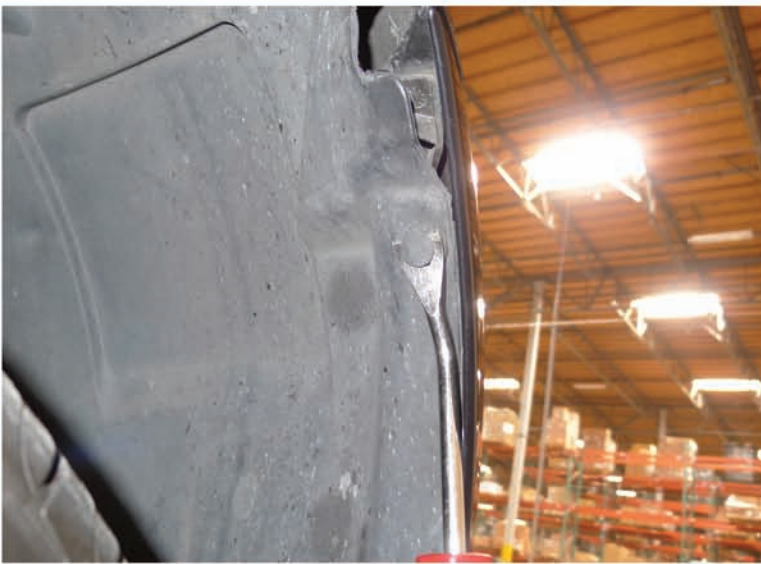


5. Remove the (2) plastic clips



6. Pull the fender liner aside



7. (2) 10mm bolts locaiton

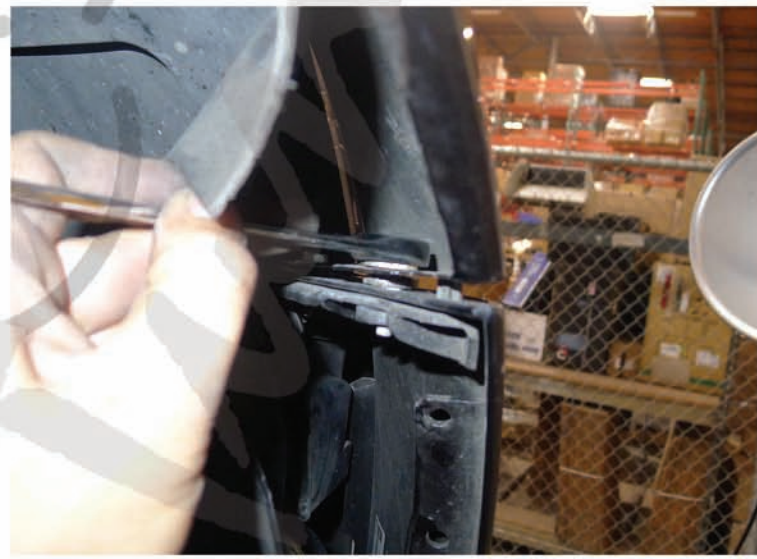

8. Remove the (2) 10mm bolts



9. (2) plastic clips and (2) 10mm bolts location



10. Remove the (2) 10mm bolts



11. Remove the (2) plastic clips



12. Remove the front bumper and set it to the one side



13. (2) 10mm bolts locaiton



14. Remove the impact absorber



15. Remove the impact absorber



16. Remove (2) 10mm bolts



17. Remove the plastic bracket



18. Remove the (2) 10mm bolts



19. Remove the (2) 10mm bolts



20. Remove the (2) 10mm bolts



21. Remove the (2) 10mm bolts



22. Remove the factory headlight



23. Disconnect the headlight harness



24. Disconnect the headlight harness



25. Connect the headlight harness to the new headlight



26. Place the new headlight in the position

Please see the " HALO and L. E. D. head lights installation instructions"
If your head lights don't have HALO and L.E.D. You can skip the installation instruction.



27. Tighten the (2) 10mm bolts



29. Tighten the (2) 10mm bolts



29. Replace the plastic bracket



30. Tighten the (2) 10mm bolts



31. Replace the impact absorber



32. Replace the front bumper




33. Replace the (2) plastic clips



34. Tighten the (2) 10mm bolts




35. Tighten the (2) 10mm bolts

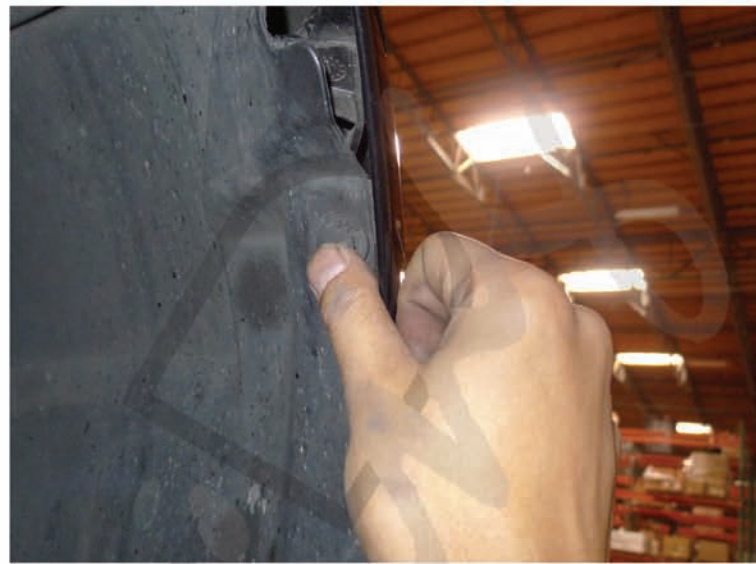

36. Replace the (2) plastic clips



37. Tighten the (4) 7mm bolts
Please repeat the steps from 1 to 37 for the opposite side

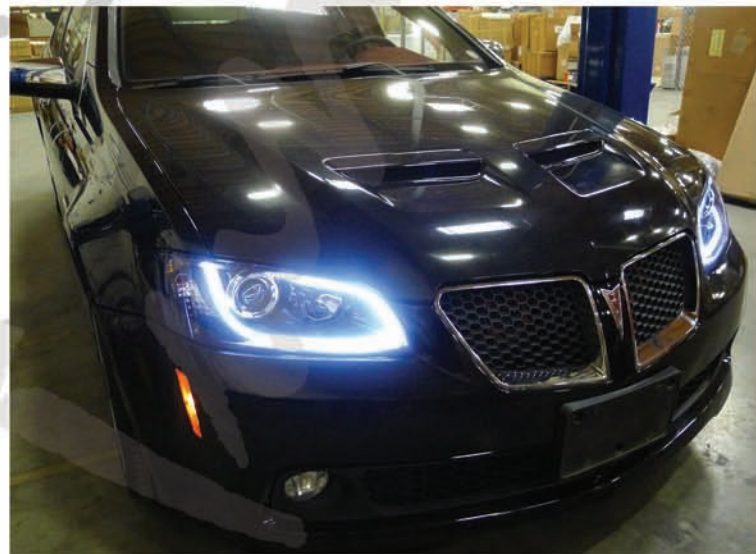

38. The installation is now complete