

# SPEC-D *Tuning*

## 2005-UP FORD MUSTANG HEADLIGHT INSTALLATION INSTRUCTION (V6 and GT)



\*If you experienced any difficulties that the instruction did not cover, Please seek local auto shop for advise.

\*Please wear protection before you work on your vehicle.

\*An assistant is helpful when removing the front bumper.

\*Please be careful while working with the bumper or body part to avoid scratching.

\*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED



\*Phillips Screwdriver



\*Flat-tip screwdriver



\*Diagonal cutter



\*Ratchet



\*Extension



\*10 mm Socket



\*10 mm Combination Wrench

### Product Part Number:

LHP-MST05-TM

LHP-MST05G-TM

LHP-MST05JM-TM

LHP-MST05B-TM

LHP-MST05G-TM

LHP-MST05JMB-TM




# FORD MUSTANG HEADLIGHT INSTALLATION INSTRUCTION



- \*If you experienced any difficulties that the instruction did not cover, Please seek local auto shop for advise.
- \*Please wear protection before you work on your vehicle.
- \*An assistant is helpful when removing the front bumper.
- \*Please be careful while working with the bumper or body part to avoid scratching.
- \*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



1. Remove the clips

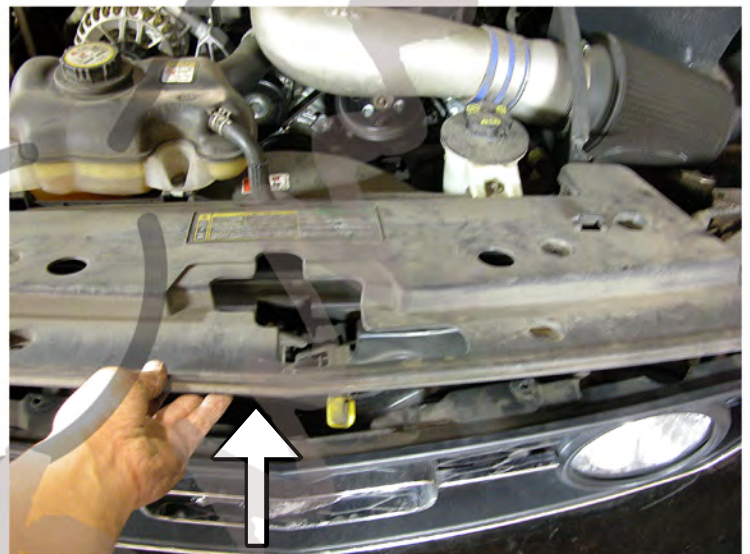


2. Take off the cover




3. Remove the bolts (BOTH SIDES)




4. Gently pull the plastic cover (BOTH SIDES)

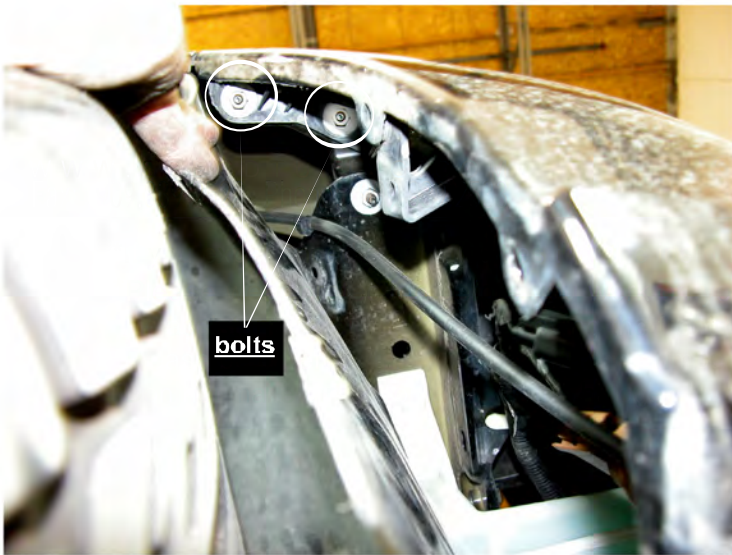

5. Remove the mounting bolts from bumper which is on the side (BOTH SIDES)

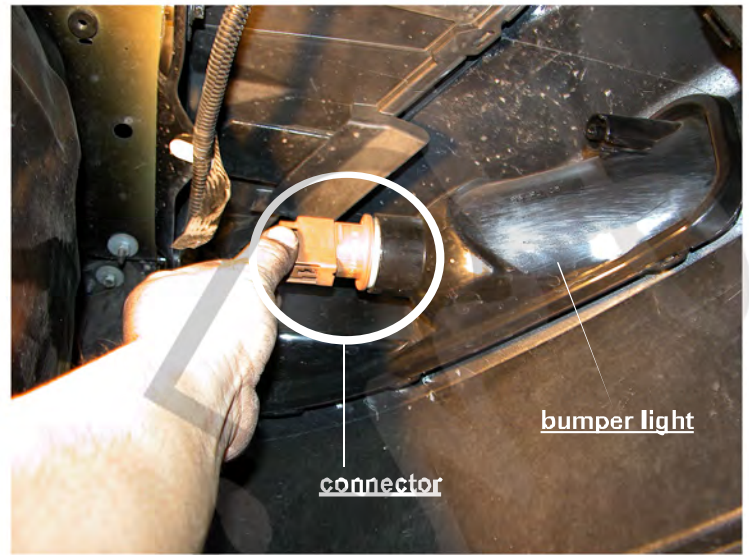

6. Remove connector from bumper light (BOTH SIDES)

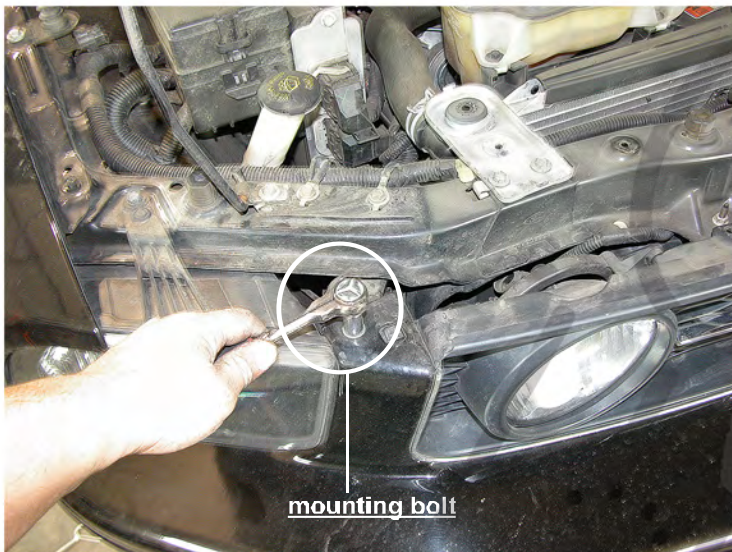

7. Remove the mounting bolts from the bumper which is on the top (BOTH SIDES)





8. Before you remove the bumper, pull the both side down first and then pull out the bumper ( Please disconnect your OEM fog light's connector before you remove the front bumper if equipped)



9. Remove the connector from the headlight (BOTH SIDES)



10. Remove the bolts from the headlight (BOTH SIDES)

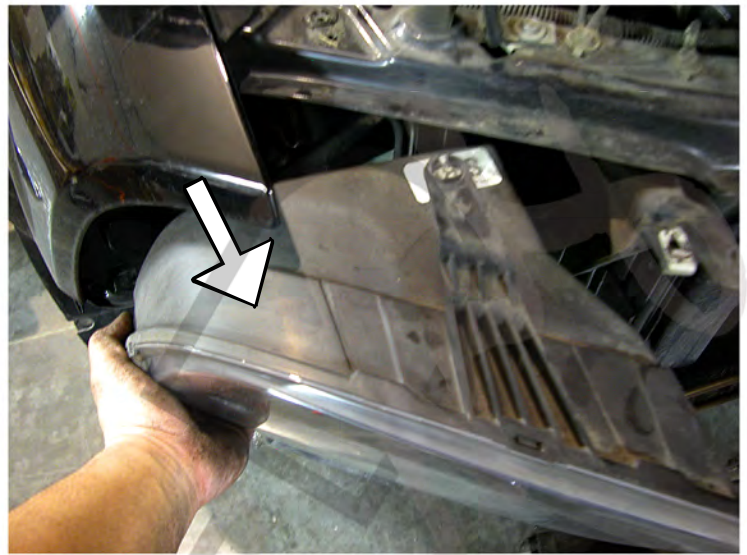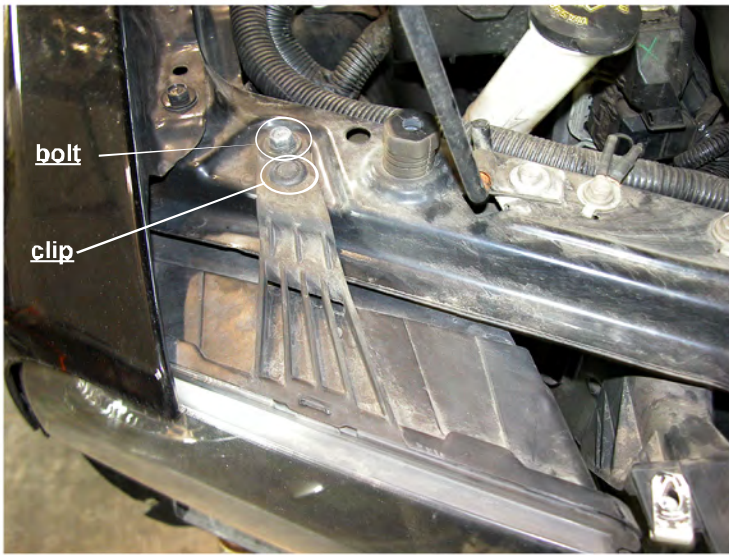

11. Remove the bolt and clip from the headlight (BOTH SIDE)

12. Pull out the headlight from the vehicle

### 13. please see the Halo and L.E.D. installation instruction

If your headlights don't have HALO or L.E.D. You can skip Step 13



14. Install the headlight (BOTH SIDES)

15. Installation is the reverse of the removal procedure

16. Complete the installation