

Installation & CARE

2005-2008 PORSCHE 911 (977) LEDS TAIL LIGHTS INSTALLATION

BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautions when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

Trim Pad Remover	Phillips Screwdriver		
			

PRODUCT NUMBER

LT-91105RLED-TM
 LT-91105RGLED-TM
 LT-91105CLEd-TM
 LT-91105GLEd-TM



LET'S START THE INSTALLATIONS



STEP 1

Open the engine lid




STEP 2

Remove (1) Phillips screw



STEP 3

Remove the factory tail light

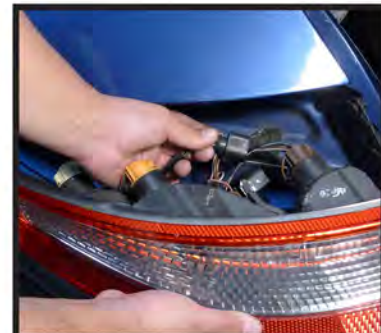

STEP 4

Disconnect the tail light harness



STEP 5

Reconnect the tail light harness to the LED taillight



STEP 6

Place the new LED taillight in the factory location



STEP 7

Tighten (1) Phillips screw. Please repeat the steps from 1 to 7 for the opposite side



STEP 8

The installation is now complete