

Installation & CARE

2008-2017 MITSUBISHI LANCER & EVO X LED TAIL LIGHT INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	Trim Pad Remover	10 mm socket	Phillips Screwdriver
			
Plastic Pry bar			
			

PRODUCT NUMBER

LT-EVO08JMLED-TM
LT-EVO08GLED-TM
LT-EVO08RLED-TM

LT-EVO08BBLED-TM
LT-EVO08BKLED-TM



LET'S START THE INSTALLATION



STEP 1

Disconnect the outer tail light harness



STEP 2

Remove the two Phillips head outer tail light mounting screws



STEP 3

Remove the factory outer tail light



STEP 4

Disconnect the outer tail light harness



STEP 5A

Set the outer tail light resistor on the metal area



STEP 5B

Set the outer tail light resistor on the metal area



STEP 6

Connect the tail light resistor



STEP 7

Connect the tail light harness



STEP 8

Install the new outer tail light housing




STEP 9

Fasten the two phillips head outer tail light mounting screws



STEP 10

Connect the outer tail light harness

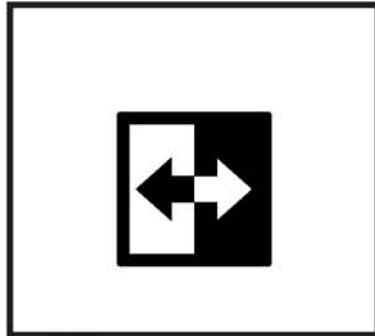


STEP 11

Please repeat the steps from 1 to 10 for the opposite side



STEP 12

Remove the seven plastic retainers

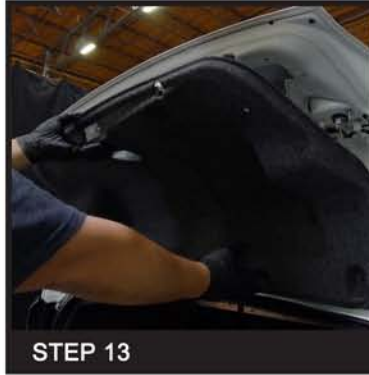

STEP 13

Remove the trunk lid lining



STEP 14

Disconnect the inner tail light harness



STEP 15

Remove the two 10mm mounting nuts



STEP 16

Remove the inner tail light



STEP 17

Remove the two light sockets from the factory inner tail light



STEP 18

Remove the light bulbs from the sockets



STEP 19A

Reinstall the two light sockets to the new inner tail light



STEP 19B

Reinstall the two light sockets to the new inner tail light



STEP 20

Install the new inner tail light housing



STEP 21

Fasten the two 10mm mounting nuts



STEP 22

Connect the inner tail light harness



STEP 23A

Run the extension wires from outer tail light to inner tail light



STEP 23B

Run the extension wires from outer tail light to inner tail light




STEP 23C

Run the extension wires from outer tail light to inner tail light




STEP 23D

Run the extension wires from outer tail light to inner tail light

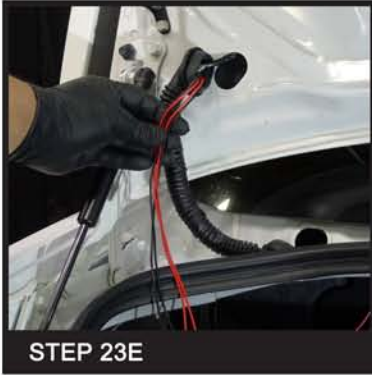

STEP 23E

Run the extension wires from outer tail light to inner tail light

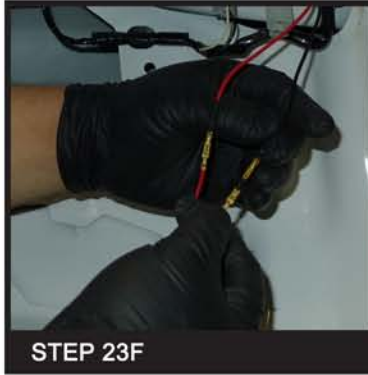


STEP 23F

Run the extension wires from outer tail light to inner tail light



STEP 24

Zip tie the wire

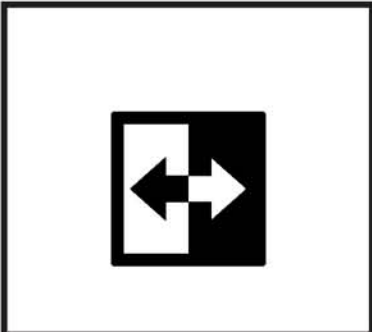

STEP 25

Please repeat the steps from 14 to 24 for the opposite side



STEP 26

Reinstall the trunk lid lining



STEP 27

Reinstall the seven plastic retainers



STEP 28

Close the trunk and complete installation



Installation & CARE

2008-2017 MITSUBISHI LANCER & EVO X LED TAIL LIGHT INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

2008-2017 MITSUBISHI LANCER & EVO X LED TAIL LIGHT INSTALLATION INSTRUCTIONS

