

2009 AND UP FORD F150 LED TAIL LIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.

 \bigwedge

An assistant is useful when removing the front bumper from your vehicle.

Please be cautions when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

Handy Remover

1/4" Ratchet

8mm Socket





WWW.SPECDTUNING.COM

2009 AND UP FORD F150 LED TAIL LIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.


An assistant is useful when removing the front bumper from your vehicle.

Please be cautions when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.



1. (2) 8mm bolt locations

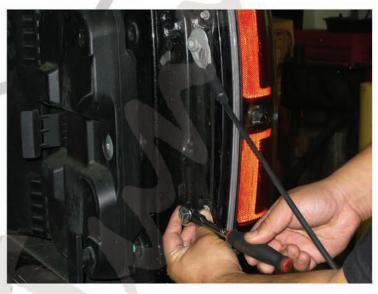

2. Remove the (2) 8mm bolts



3. Remove the factory tail light



4. Disconnect the wire harness



5. Remove the brake and signal light socket



6. Remove the brake and signal light bulb from the socket



7. Connect the brake and signal light socket to the LED tail light




8. Please see the "L.E.D. tail lights installation instructions" If your tail lights don't have L.E.D. You can skip the installation instructions.



9. Connect the wire harness



10. Place the LED tail light in the stock location

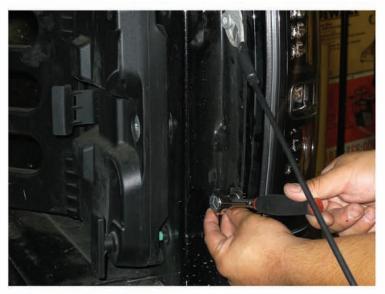

11. Tighten the (2) 8mm bolts



12. Please repeat the steps in order from 1 to 11 for the opposite side.



13. The installation is now complete