

Installation & CARE

1999-2004 MUSTANG SEQUENTIAL TAIL LIGHTS INSTALLATION

BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

¼" Ratchet	Plastic pry bar	11 mm socket
		

PRODUCT NUMBER

LT-MST99RGLED-SQ-TM
 LT-MST99JMLED-SQ-TM
 LT-MST99CLEL-SQ-TM
 LT-MST99RLED-SQ-TM
 LT-MST99GLED-SQ-TM
 LT-MST99BBLED-SQ-TM



LET'S START THE INSTALLATIONS




STEP 1

Undo passenger side interior lining hand screw



STEP 2

Undo driver side interior lining hand screw

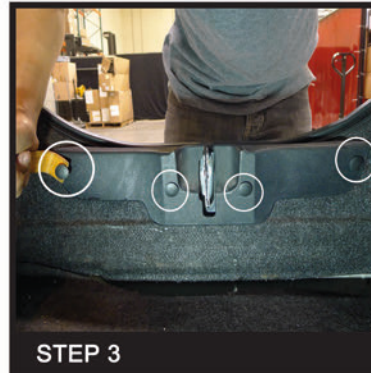

STEP 3

Remove (4) center panel fasteners



STEP 4

Remove the center panel




STEP 5

Remove the trunk lining



STEP 6

Disconnect the wire harness

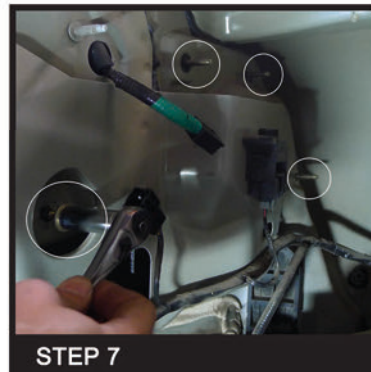

STEP 7

Peel back lining and remove (4) 11mm nuts



STEP 8

Remove the tail light housing and wiring harness grommet




STEP 9

Secure the LED tail light wiring harness grommet



STEP 10

Install the tail light housing

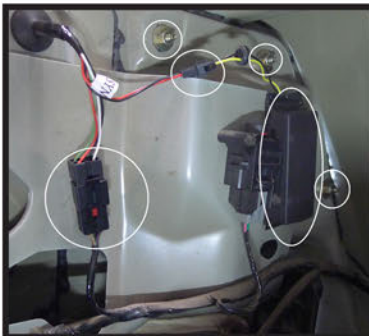

STEP 11

Attach the resistor to a secure location and resecure the connectors and (4) nuts.



STEP 12

Reinstall the trunk lining



STEP 13

Reinstall the center panel and (4) fasteners



STEP 14

Reinstall the passenger side interior lining hand screw



STEP 15

Reinstall the driver side interior lining hand screw




STEP 16


Please repeat the steps from 5 to 11 for the opposite side



The installation is now complete

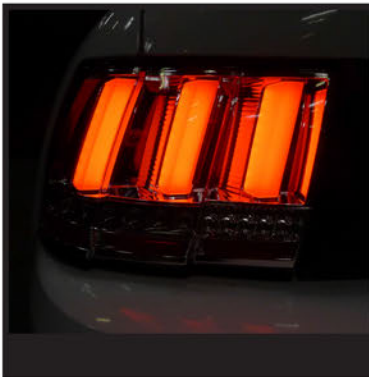

Parking light

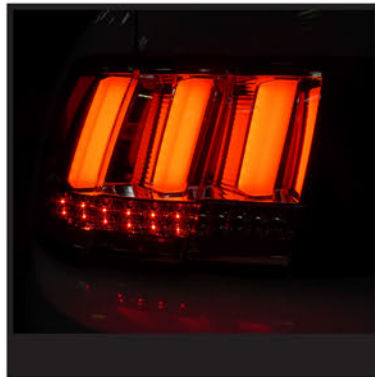

Brake light



Brake + Reverse light

On our website you can discover more about Custom & Factory Tail Lights.