

# INSTALLATION & CARE

## 2009-2019 DODGE RAM LED TAIL LIGHT INSTALLATION INSTRUCTIONS

### BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

¼" Ratchet	Trim Pad Remover	¼" T25 Torx Bit	
			

### PRODUCT NUMBER

LT-RAM09CLED-RS  
 LT-RAM09RLED-RS  
 LT-RAM09GLED-RS  
 LT-RAM09RGLED-RS  
 LT-RAM09JMLED-RS  
 LT-RAM09BKLED-RS

### LET'S START THE INSTALLATION




**STEP 1**

Remove the two T25 bolts



**STEP 2**

Unseat the tail light housing

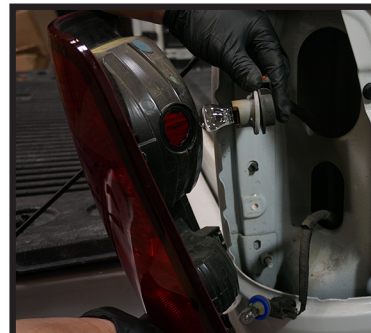

**STEP 3**

Disconnect all light bulb sockets and  
uninstall the tail light housing



**STEP 4**

Remove the two light bulbs from the  
light sockets



**STEP 5A**

Connect the two connectors to the light  
socket




**STEP 5B**

Connect the two connectors to the light  
socket




**STEP 6**

Reinstall the new tail light housing

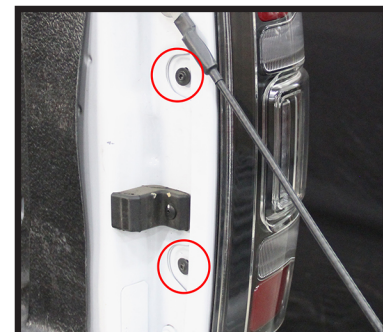

**STEP 7**

Tighten the two T25 bolts



**STEP 8**

Please repeat the steps from 1 to 7 for the opposite side



**STEP 9**

Close the tailgate to complete the installation

