

2009-UP DODGE RAM LED TAILLIGHTS

INSTALLATION INSTRUCTIONS

- *If you experience any difficulties that the instructions did not cover, Please seek assistance at local automotive shop.
- *Please wear protection before you work on your vehicle.
- *An assistant is useful when removing the front bumper from your vehicle.
- *Please be cautious when working with the bumper or any parts belonging to the vehicles' body prevent scratching.
- *Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

Handy Remover

1/4" Ratchet

T15 Socket






2009-UP DODGE RAM LED TAILLIGHTS INSTALLATION INSTRUCTIONS

*If you experience any difficulties that the instructions did not cover, Please seek assistance at local automotive shop.

*Please wear protection before you work on your vehicle.



*Please be cautious when working with the bumper or any parts belonging to the vehicles' body prevent scratching.


*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



1. Stock light



2. (2) T15 scrwe locations and remove the (2)T15 screw

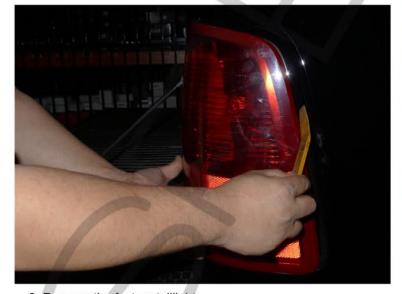

3. Remove the factory taillight



4. Remove the taillight sockets




5. Remove thr brake light bulb



6. Connect the brake light harness to the LED taillight please see the "L.E.D. tail lights installation instructions" If your tail lights don't have L.E.D. you can skip the installation instructions.



7. Connect the brake light harness to the LED taillight

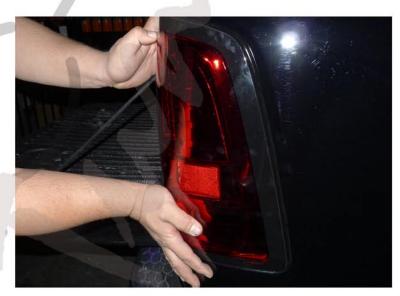

8. Place the LED taillight in the stock location



9. Tighten the (2) T15 screws



10. Please repeat the steps in order from 1 to 9 for the opposite side. The installation is now complete $\frac{1}{2}$