

# INSTALLATION & CARE

## 2019-UP DODGE RAM 1500 FULL LED TAIL LIGHT INSTALLATION INSTRUCTION

### BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	Trim Pad Remover	T25 Torx Bit	
			

### PRODUCT NUMBER

LT-RAM1915BBLED-TM  
 LT-RAM1915BKLED-TM  
 LT-RAM1915JMLED-TM  
 LT-RAM1915JRLED-TM  
 LT-RAM1915RLED-TM  
 LT-RAM1915GLED-TM

### LET'S START THE INSTALLATION



**STEP 1**

Lower the tailgate, unclip and remove the tailgate cable



**STEP 2**

Lower the tailgate, unclip and remove the tailgate cable



**STEP 3**

Remove the two retainer clips



**STEP 4**

Remove the two retainer clips



**STEP 5**

Remove the two T25 Torx bolts




**STEP 6**

Unseat the factory tail light housing



**STEP 7**

Unlock the connector red lock to disconnect the tail light harness and remove the factory tail light housing

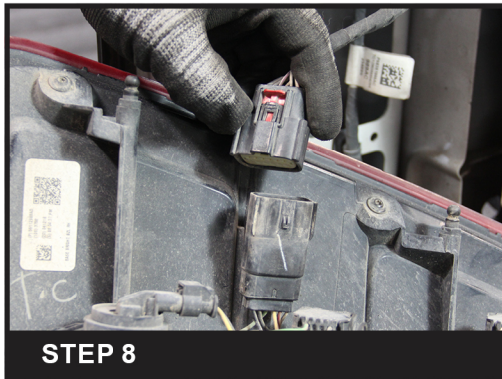

**STEP 8**

Unlock the connector red lock to disconnect the tail light harness and remove the factory tail light housing




**STEP 9**

Connect the tail light harness



**STEP 10**

Seat the new tail light assembly in place

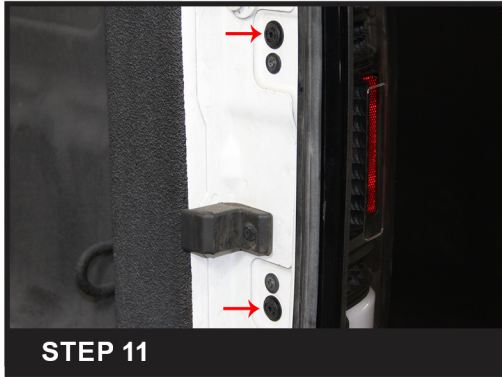


**STEP 11**

Reinstall the two retainer clips



**STEP 12**

Reinstall the two T25 Torx bolts

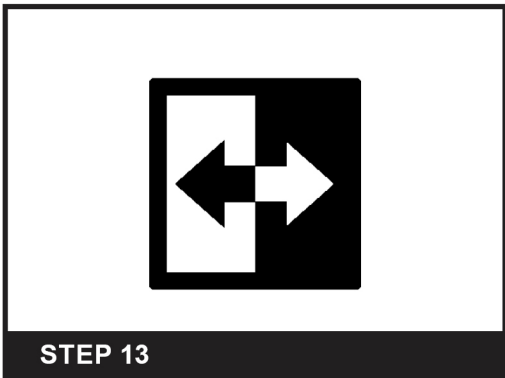

**STEP 13**

Please repeat the steps from 1 to 12 for the opposite side



**STEP 14**

Reinstall the tailgate cable



**STEP 15**

Reinstall the tailgate cable



**STEP 16**

Close the tailgate to complete the installation

