


# Installation & CARE

## 2001-2005 FORD RANGER TAIL LIGHTS INSTALLATION

### BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver			
			

### PRODUCT NUMBER

LT-RAN01-TM  
LT-RAN01JM-TM  
LT-RAN01G-TM



### LET'S START THE INSTALLATIONS



**STEP 1**

Lower tailgate



**STEP 2**

Remove two outer tail light Phillips head screws




**STEP 3**

Remove two inner tail light Phillips head screws



**STEP 4**

Remove two sockets from tail lights and remove tail light housing

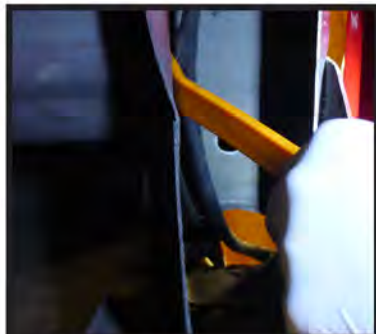

**STEP 5**

Disconnect wire harness faster, accessible from under the bumper



**STEP 6**

Secure reverse light socket to the top position and main function light to lower position



**STEP 7**

To run the extra light, connect the black socket wire to the Black-yellow harness wire and Red socket wire to the Yellow harness wire



**STEP 8**

Install tail light




**STEP 9**

Reinstall two outer tail light Phillips head screws



**STEP 10**

Reinstall two inner tail light Phillips head screws

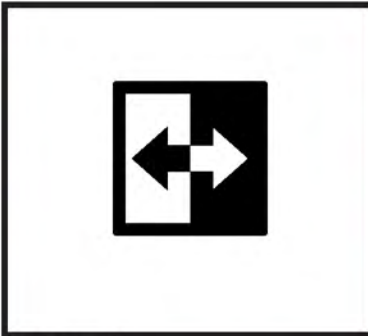

**STEP 11**

Please repeat the steps from 2 to 10 for the opposite side



**STEP 12**

The installation is now complete