

# Installation & CARE

## 2004-2008 FORD F150 TAIL LIGHTS INSTALLATION

### BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED


¼" Ratchet	Trim Pad Remover	10 mm socket	
			

### PRODUCT NUMBER

LT-F15004JM-TM  
LT-F15004G-TM  
LT-F15004-TM




### LET'S START THE INSTALLATIONS

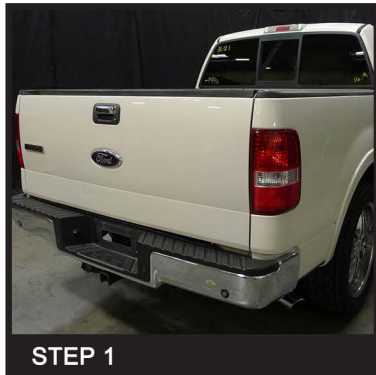


**STEP 1**

Before installation

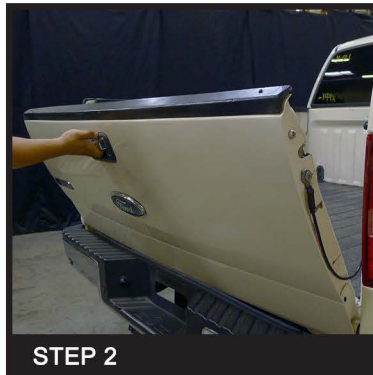


**STEP 2**

Lower the tail gate

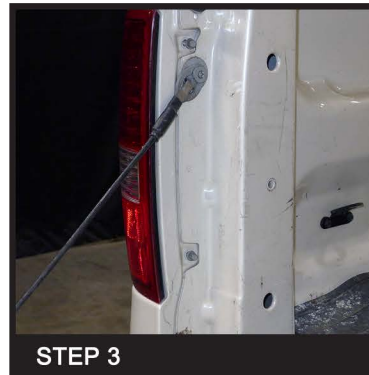


**STEP 3**

(2) 8mm bolts location

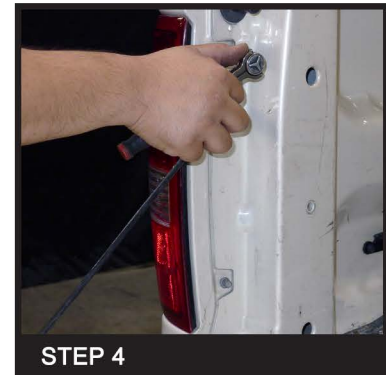


**STEP 4**

Remove the (2) 8mm bolts

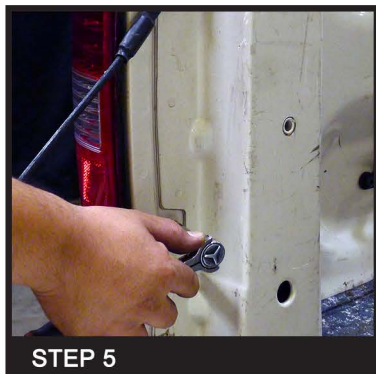

**STEP 5**

Remove the (2) 8mm bolts

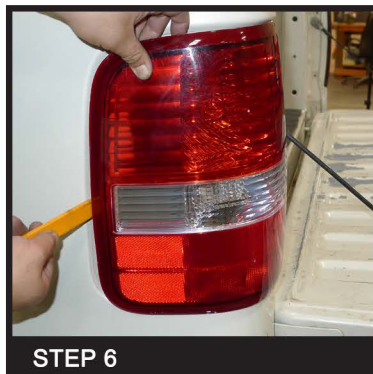

**STEP 6**

Remove the factory taillight



**STEP 7**

Remove the taillight sockets




**STEP 8**

Please see the " L.E.D. tail lights installation instruction" If your tail lights don't have L.E.D. You can skip the installation instruction. Install the taillight sockets to the new taillight



**STEP 9**

Place the new taillight in the stock location

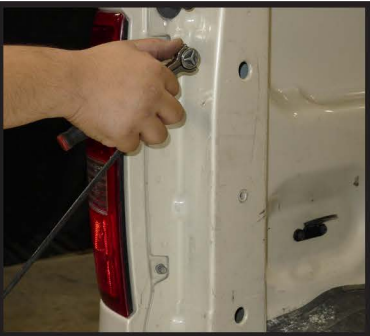


**STEP 10**

Tighten the (2) 8mm bolt



**STEP 11**

Close the tail gate

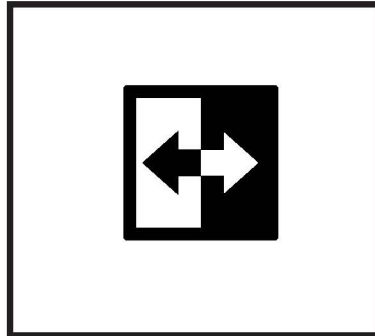

**STEP 12**

Please repeat the steps from 1 to 10 for the opposite side



**STEP 13**

The installation now is complete