

Installation & CARE

2004-2008 FORD F150 TAIL LIGHTS INSTALLATION

BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED


1/4" Ratchet	Trim Pad Remover	10 mm socket	
			

PRODUCT NUMBER

LT-F15004JM-TM
LT-F15004G-TM
LT-F15004-TM




LET'S START THE INSTALLATIONS

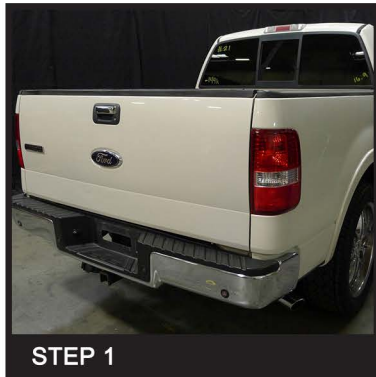


STEP 1

Before installation

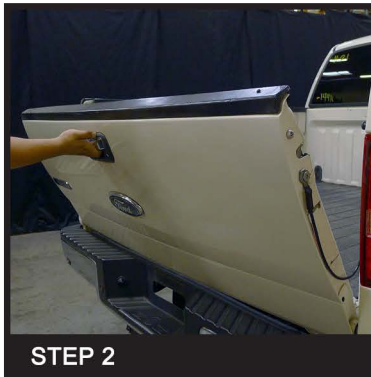


STEP 2

Lower the tail gate

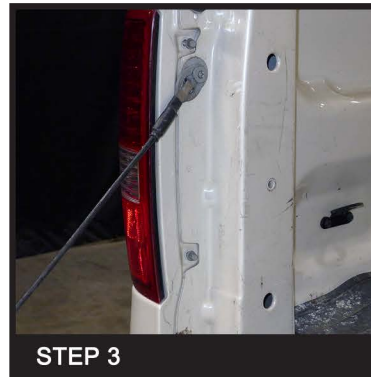


STEP 3

(2) 8mm bolts location

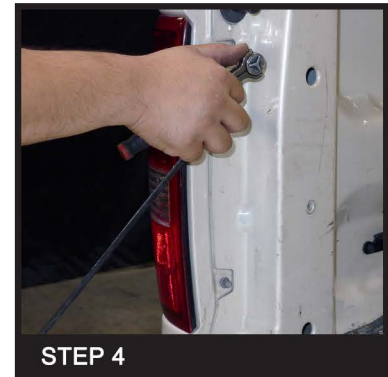


STEP 4

Remove the (2) 8mm bolts

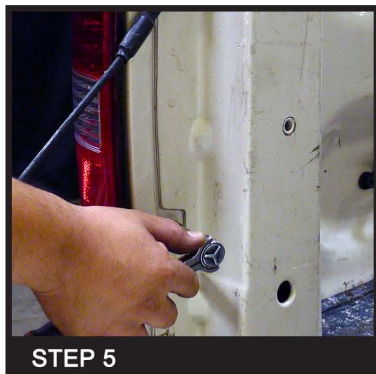

STEP 5

Remove the (2) 8mm bolts

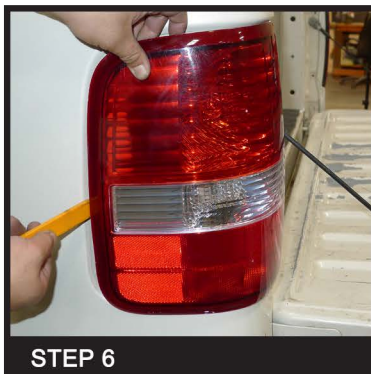

STEP 6

Remove the factory taillight



STEP 7

Remove the taillight sockets




STEP 8

Please see the " L.E.D. tail lights installation instruction" If your tail lights don't have L.E.D. You can skip the installation instruction. Install the taillight sockets to the new taillight



STEP 9

Place the new taillight in the stock location

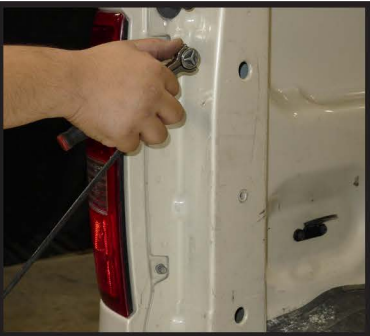


STEP 10

Tighten the (2) 8mm bolt



STEP 11

Close the tail gate

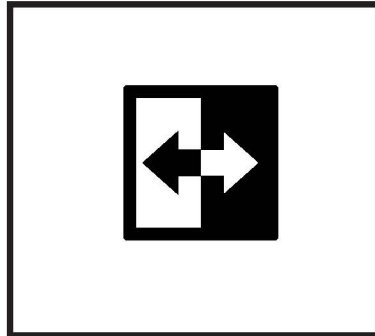

STEP 12

Please repeat the steps from 1 to 10 for the opposite side



STEP 13

The installation now is complete