

# SPEC-D *Tuning*

## 1998-2005 LEXUS GS300 400 **LED TAIL LIGHTS** INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

1/2" Drive Ratchet

10mm Socket

Handy remover

Phillips Screwdriver

### Product Part Numbers:

LT-GS300RTRLED-TM

LT-GS300RTRGLED-TM

LT-GS300RTGLED-TM





## 1998-2005 LEXUS GS300 400 LED TAIL LIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop


Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

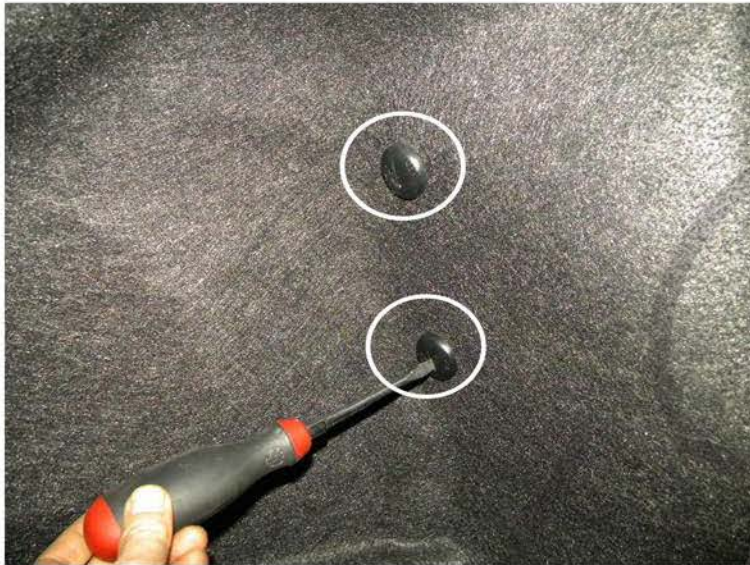

1. Remove the plastic cover



2. Remove the (2) 10mm nuts



3. Remove the plastic cover



4. Remove the (2) 10mm bolts





5. Remove the tail light



6. Remove the tail light harness



7. Connect the socket with the shorter wire to the outer LED connector


please see the "L.E.D. tail lights installation instruction"  
If your tail lights don't have L.E.D. You can skip the installation instruction.



8. Connect this harness adapter for the 2001-2005 model



9. Place the LED tail light in the stock location

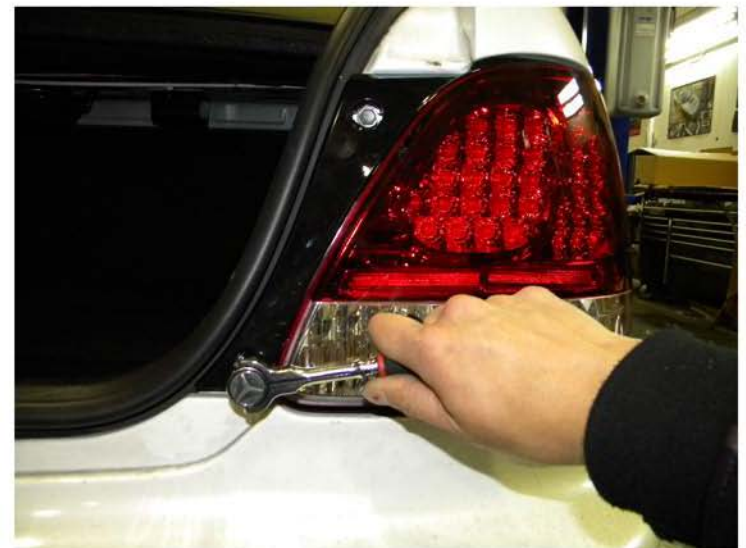

10. Tighten the (2) 10mm bolts





11. Tighten the (2) 10mm nuts



12. Replace the plastic covers



13. (14) plastic clips location



14. Remove the (14) plastic clips



15. Remove the trunk liner



16. Remove the (2) 10mm nuts





17. Remove the light socket



18. Remove the stock tail light



19. Place the LED tail light in the stock location



20. Plug the LED tail light in the light socket



21. Plug in the tail light socket



22. Tighten the plastic nut



23. Connect the resistor and attach to the trunk



24. Replace the trunk liner and the (14) plastic clips



25. Please repeat the steps in order from 1 to 24 for the opposite side



26. The installation is now complete