

Bicycle Installation



Tighten well

**2**  
  
**MAX**  
90 Lb • 40 Kg



SR0018  
91392  
Optional  
locking kit  
available


### WARNINGS / LIMITATIONS

- Carrying capacity should not exceed designated carrying capacity for specific model.
- Check tightness off all bolts and knobs periodically.
- Not intended for off-road use.
- Not intended for tandems or recumbents.
- Do not exceed weight per class of receiver; class 1 = 2 bike, class 2 and up = 3 or 4 bikes (180lbs/80Kg max).
- Do not install on trailer or towed vehicle.
- Failure to use strap may result in loss of bicycles.


1



Bicycle Installation

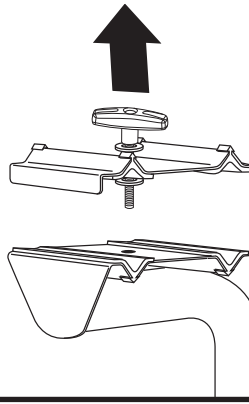


2

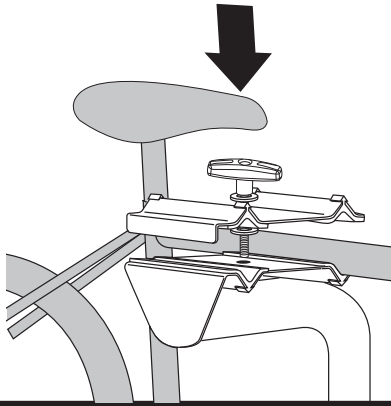


3



Tighten Well

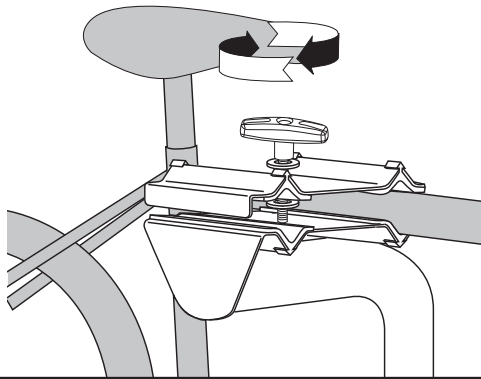

4

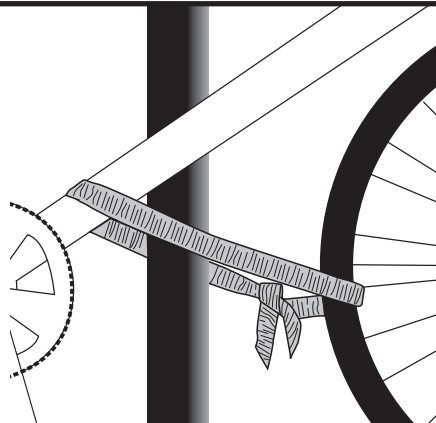

• Strap not included