 Hitch must have a minimum Class II rating.

**MAX**  
 45 Lb  
 20 Kg  
 1 BIKE



**MAX**  
 90 Lb  
 40 Kg  
 2 BIKES










**MAX**  
 132 Lb  
 60 Kg  
 3 BIKES



**MAX**  
 180 Lb  
 80 Kg  
 4 BIKES



**PARTS INCLUDED**

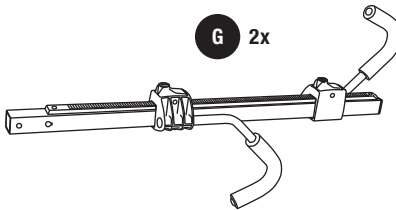


WARNINGS / LIMITATIONS

- 4 Bike maximum carrying capacity = 180 lbs./80Kg
- Fits 20-29" wheels up to 3" wide.
- Can work with bikes with fenders.
- Check tightness off all bolts periodically.
- Check straps for wear and replace periodically.
- Not intended for off-road use.
- Not intended for tandems or recumbents.
- Do not install on trailer or towed vehicle.

1



Tighten Well

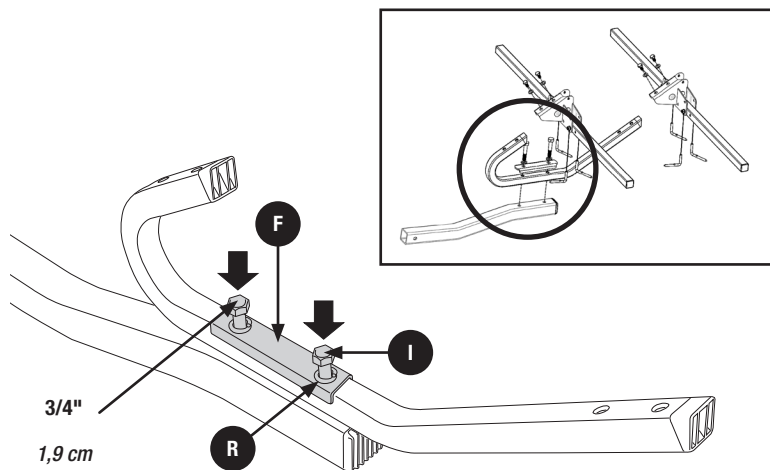



IMPORTANT

Do not over tighten.

Do not use power or pneumatic tools.



2

2 X

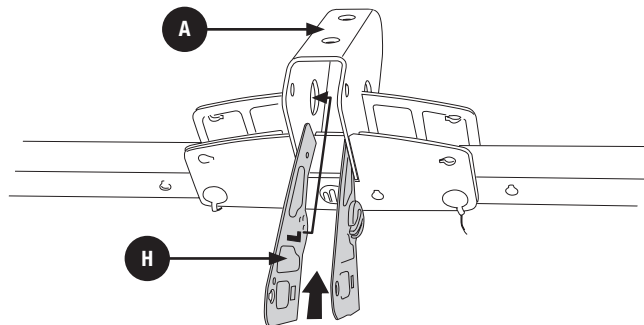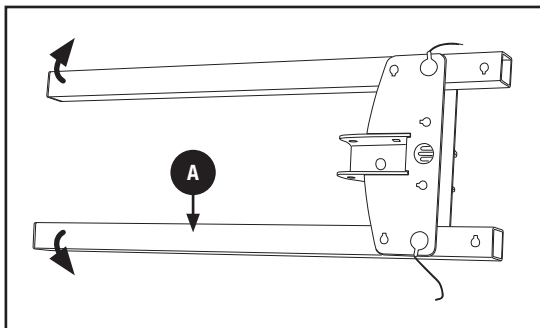


3

2 X

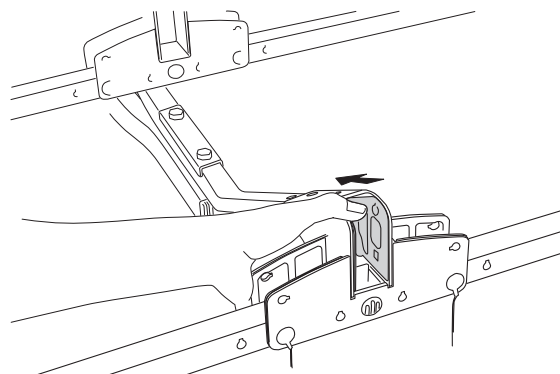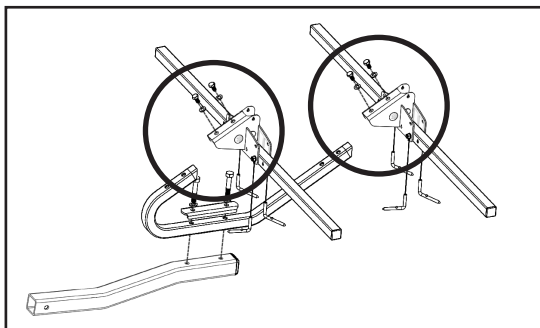

4

2 X

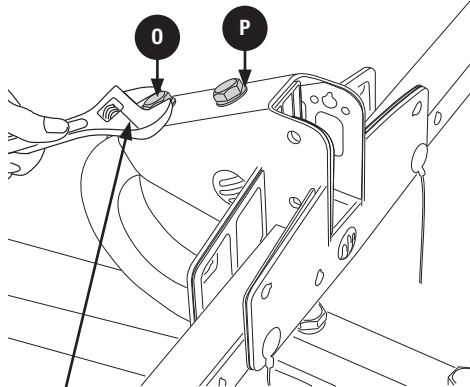


17 mm  
(not included)



Tighten Well


5

2 X

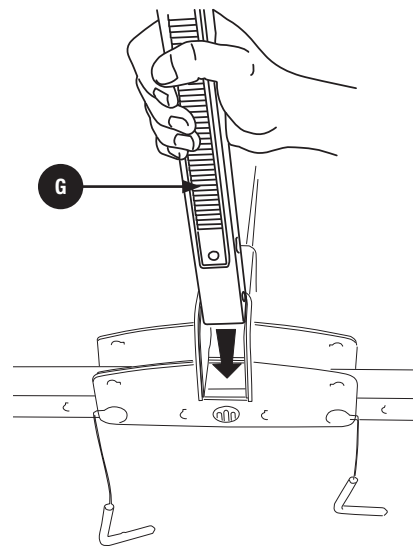


6

2 X

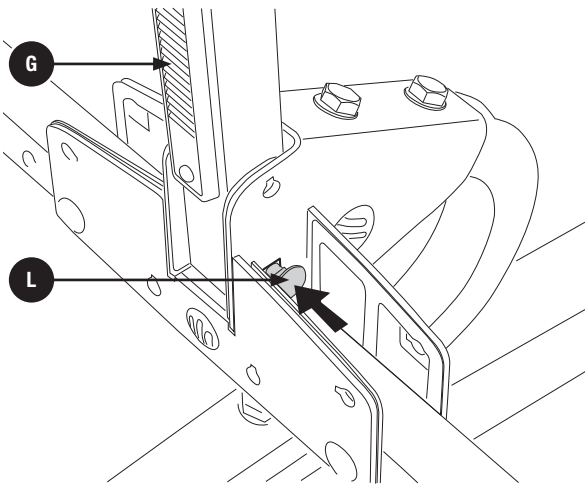


7

2 X

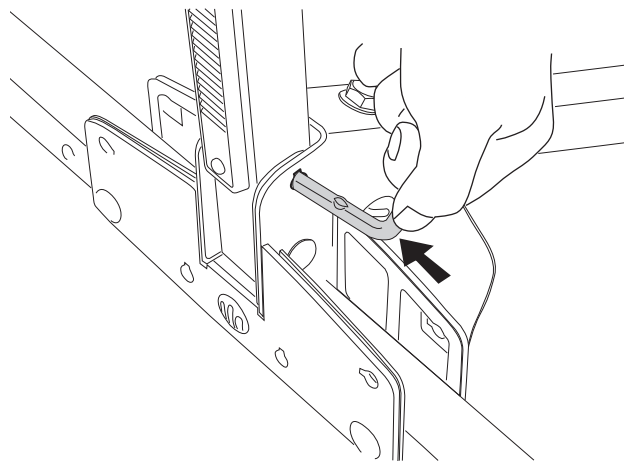


8

2 X

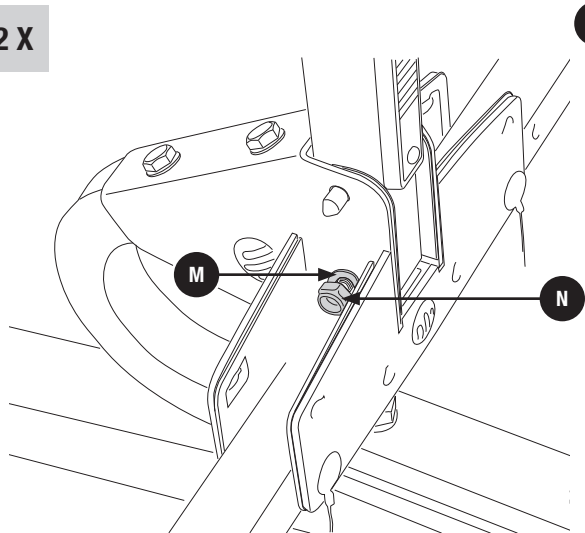





Tighten Well

B

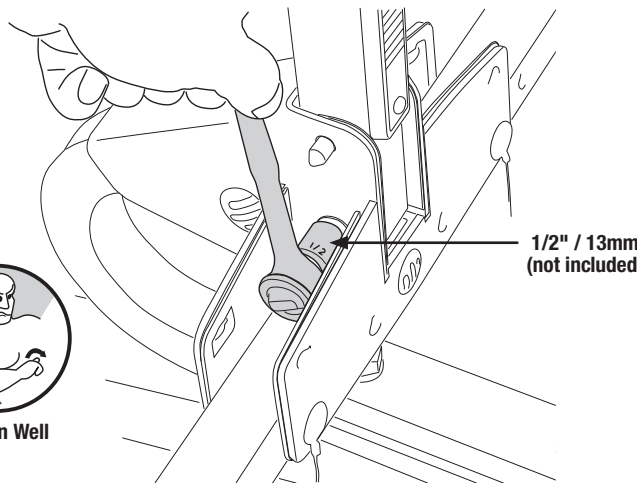






1/2" / 13mm  
(not included)

9

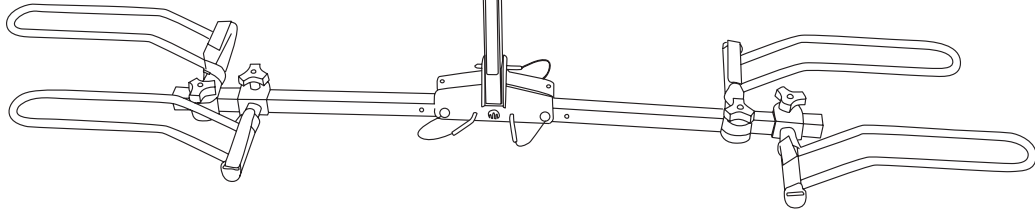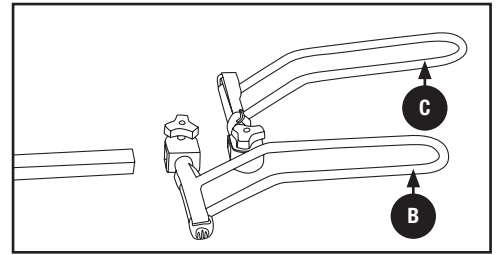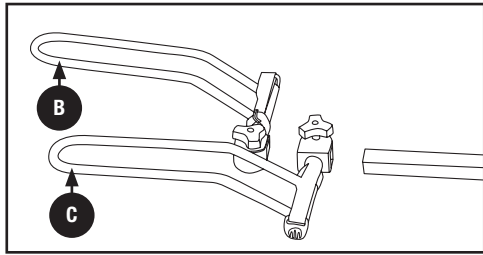

10



FOOT INSTALLATION FOR 2" RECEIVERS

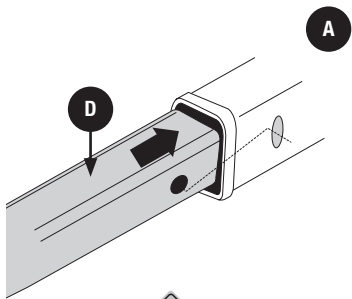

Lock should click onto the end of the bolt.


11

THE RACK IS NOW READY TO LOAD BIKES.

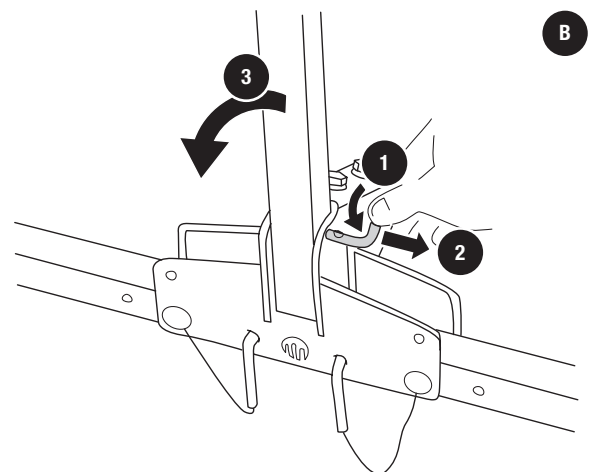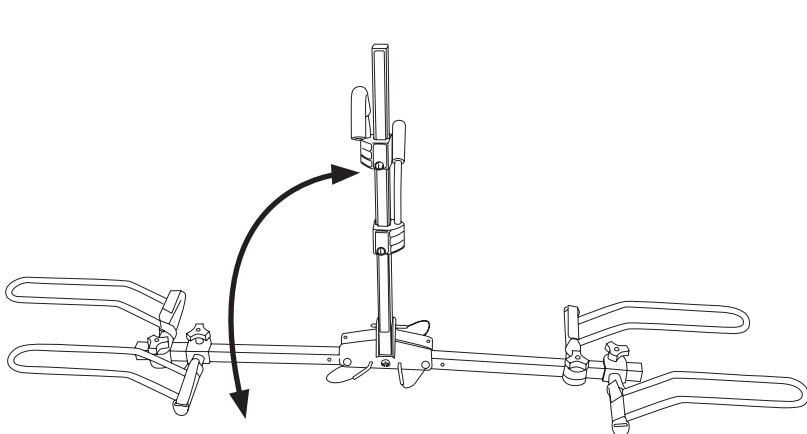


# 12

## A

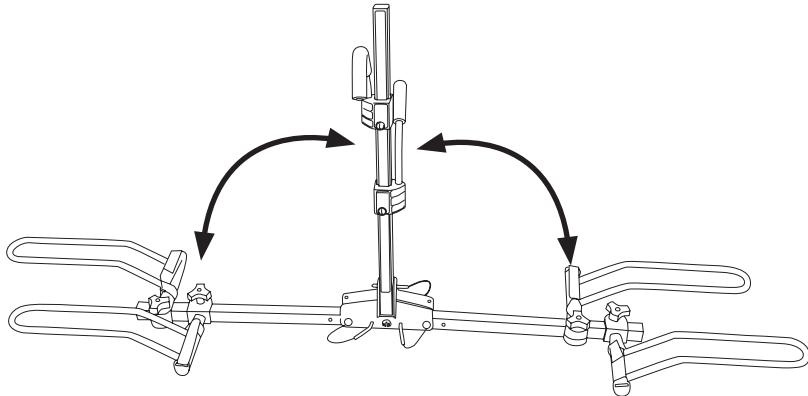


## B

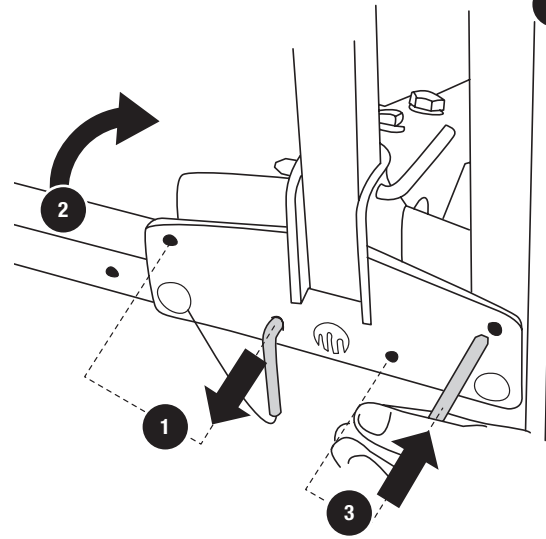

# 13




Bicycle Installation

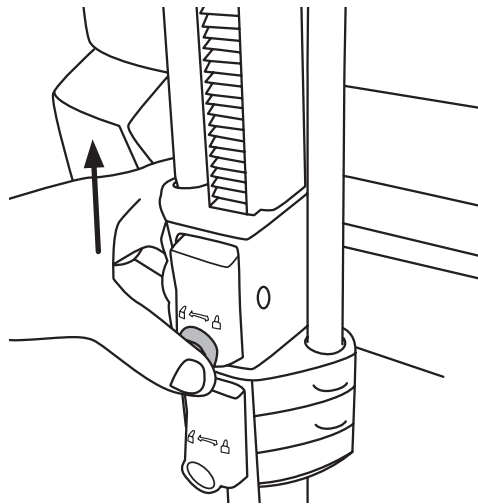

Raise the hooks by depressing the grey buttons and sliding the hooks upward on the mast.


# 14

## A

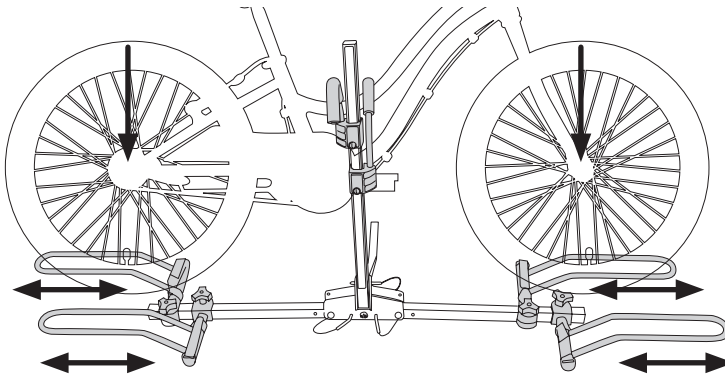


Place the bike on the bike tray with the wheels in the wheel trays and push down hook firmly until top tube fits snug against top bend of hook underside. If loading two bikes, load the first bike (heaviest bike) onto the tray closest to the vehicle.

## B

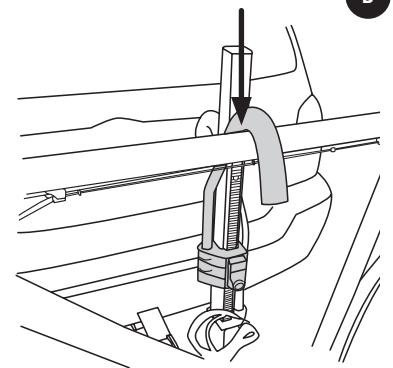

Push down hook firmly

# 15

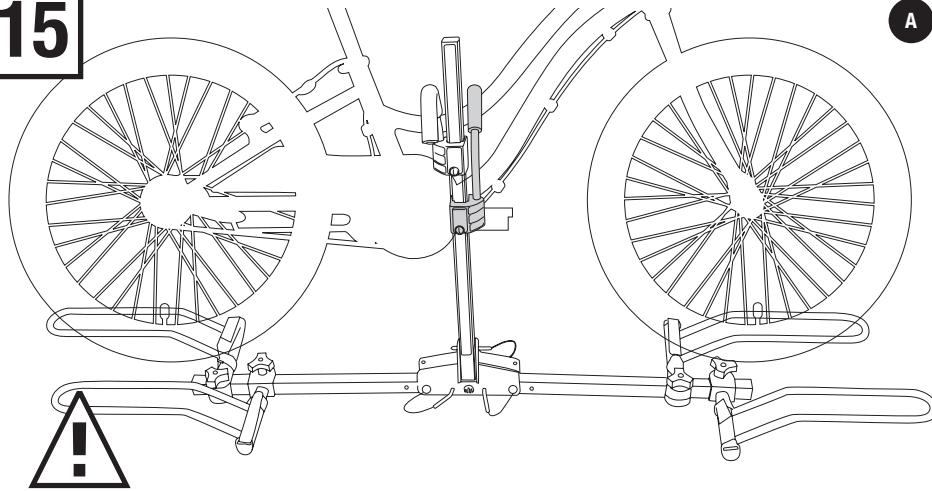


**ALWAYS POSITION SMALLER BICYCLE BETWEEN THE BICYCLE SUPPORT AND THE CAR BUMPER. THE BUYER SHOULD BE AWARE THAT THE COMBINED WEIGHT OF THE BICYCLE CARRIER (69 lbs/31 kg) AND BICYCLES COULD EXCEED THE MAXIMUM WEIGHT ALLOWED FOR A TRAILER OR A FIFTH-WHEEL. NOT RESPECTING THE PERMISSIBLE MAXIMUM LOAD AUTOMATICALLY VOIDS WARRANTY.**

# B




**Tighten Well**

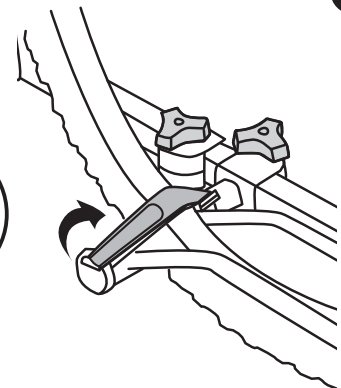


**Attach wheel straps to front and rear wheels as shown. Check security of bike. Tighten down hook or wheel straps if needed.**

# 16


# A

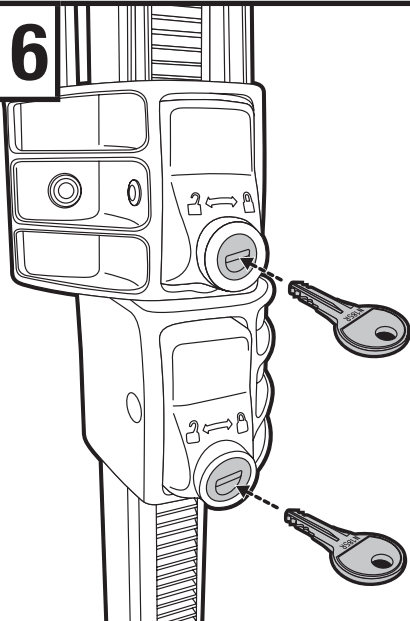

# B

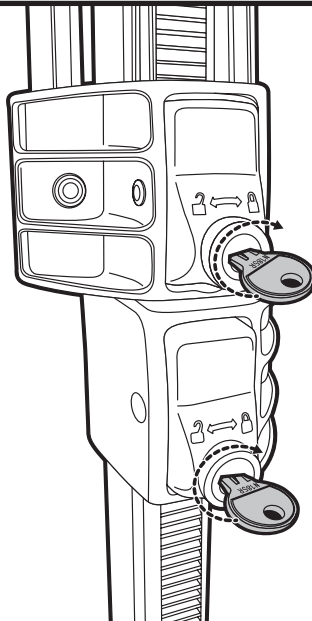

# C

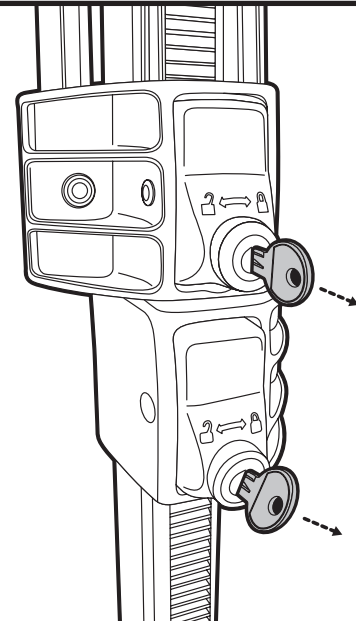

**To lock the bikes to the carrier.**

## SPORTRACK GUIDELINES

When using SportRack Load carriers and accessories, the user must understand the precautions. The points listed below will assist you in using the rack system and will encourage safety.

- For quality fits and safety, use only the recommended rack or accessory as stated in SportRack's current Fit Guide. Do not assume a rack will fit, always check the current Fit Guide when obtaining a new vehicle.
- Unless stated otherwise in these instructions, do not carry more than 59 kg (130 lbs.) on SportRack load carriers. SportRack load carriers do not increase gutter or roof strength. SportRack can not warranty loads that exceed this limit. Total load = cargo weight plus weight of accessories used to carry cargo.
- Always make sure all doors are open when mounting a roof rack system. Make sure all knobs, bolts, screws, straps, and locks are firmly attached, tightened and locked before every trip. Knobs, bolts, screws, straps and locks must be periodically inspected for signs of wear, corrosion, and fatigue. Check your load at stops during the trip to ensure continued fastening security.
- Check local and state laws governing projection of objects beyond the perimeter of a vehicle. Be aware of the width and height of your cargo since low clearance branches, bridges, and parking garages can affect the load. All cargo will affect the vehicle's driving behavior. Never drive with any lock, knob or rack in an open or unlocked position. All long loads such as, but not limited to, sailboards, surfboards, kayaks, canoes, and lumber must be tied down front and rear to the bumpers or tow hooks of the vehicle.
- Remove your SportRack rack and accessories when they are not in use and before entering automatic car washes.
- All locks must be turned and moved periodically to ensure smooth operation. Use graphite or dry lubricant to help this. SportRack locks are designed to deter vandalism and theft but should not be considered theft proof. Remove valuable gear if your vehicle is unattended for an extended period. Place at least one key in the glove compartment.
- For safety to your vehicle and rack system, obey all posted speed limits and traffic cautions. Adapt your speed to the conditions of the road and the load being carried.
- Do not use SportRack load carriers and accessories for purposes other than those for which they were designed. Do not exceed their carrying capacity. Failure to follow these guidelines or the product's instructions will void the warranty.
- All loads must be secured using the provided straps.
- Consult with your SportRack dealer if you have any questions regarding the operations and limits of SportRack products. Review all instructions and warranty information carefully.
- Not for use on trailers or towed vehicles.
- Not for offroad use.
- Keep bicycle tires away from hot exhaust.

