



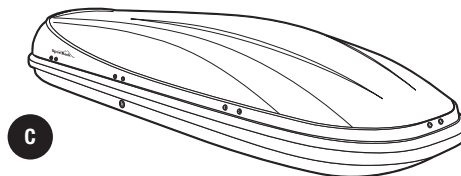
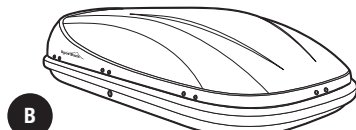


PARTS INCLUDED

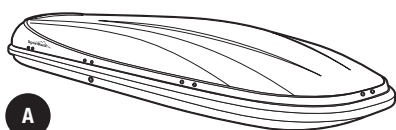


part	description	part number	qty.
A	Horizon Cargo Box SR7011	SR7011	1
B	Horizon Cargo Box SR7016	SR7016	1
C	Horizon Cargo Box SR7017	SR7017	1
—	Master Parts Bag - Quick Release	04952	1
D	Saddle Quick Release	04106	4
E	Interior Plate - 5 Hole	03918	4
F	Reinforcing Plate	10378	4
G	Carriage Bolt	04852	8
H	Threaded Knobs	04877	8
I	Mask, Vinyl Hole Covers	10171	1
J	Key	~	2

1

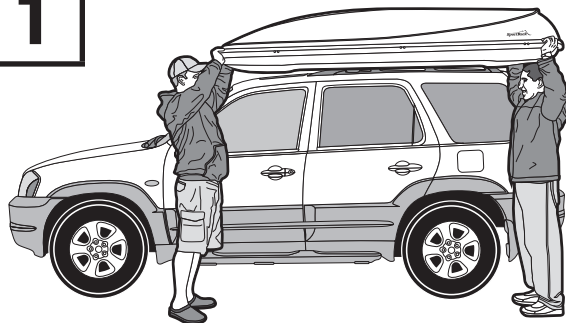

- With the help of another person place box on roof rack.


2

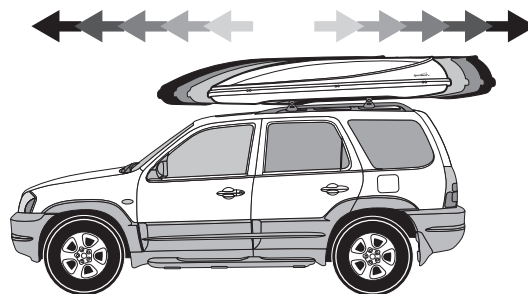

- Slide forward or backward to position mounting slots properly over crossbars.

NOTE: Mount box towards the rear of the vehicle to minimize wind resistance.

3

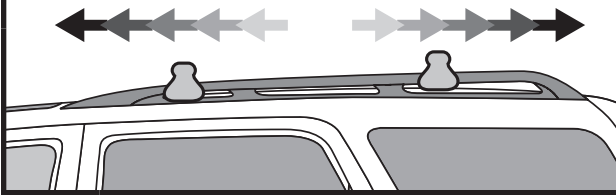

- If crossbars are adjustable, set to widest position which can be accommodated by mounting slots.


NOTE: Minimum bar spread = 23 5/8" or 600mm.

4




- Check rear hatch and front hood clearance.

5

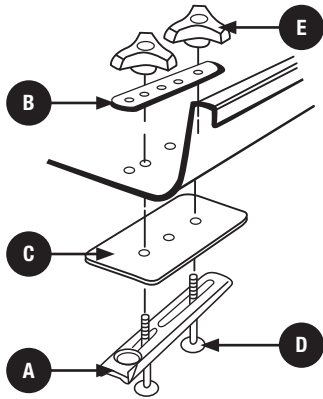

- Remove carrier from vehicle's roof rack crossrails. Assemble the saddle assembly on carrier bottom, using the desired pre-drilled holes. Turn the threaded knobs clockwise just enough to engage the threaded ends of the carriage bolts. Leave the assembly loose.

6

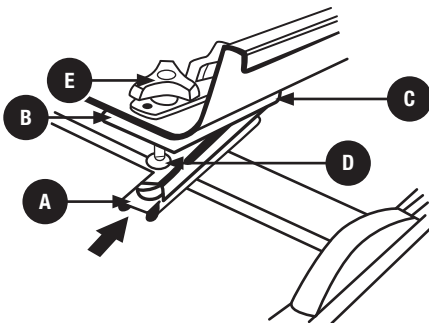

- When you are ready to mount the carrier to the vehicle's roof rack crossrails, slide each saddle until it separates from the carriage bolt and drops down.


7




- Make sure that loads are evenly distributed inside the roof box. Do not exceed the maximum permitted load of 110 lbs./50 kg for the box or the maximum permitted load for the roof as recommended by the vehicle manufacturer, as well of the maximum load of the load carrier.

8

UNLOCKING/LOCKING THE BOX

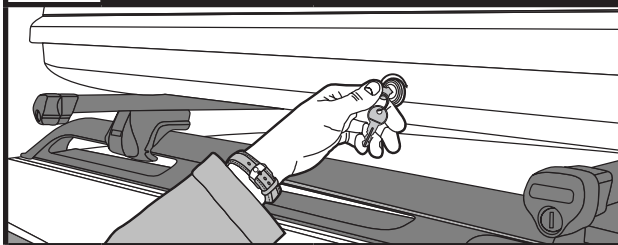

UNLOCKING: Insert the key and turn clockwise to the unlocked position. The key can only be removed when the box lid is closed and locked.



OPEN




CLOSED

LOCKING: To close, press down on the lid at the front and rear of the box. Turn the key counter-clockwise to lock. Remove key.


9

EXCHANGING LOCK CORES

- In order to change the existing lock core to a different lock core number, follow steps 1–9 below.

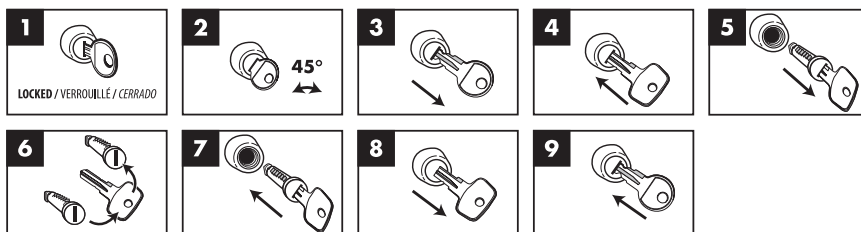

10



- This box is designed with a patented single opening system, allowing you to open the box from either side and providing easy access to each pair of Easy-Snaps during installation and removal.

11

MAINTENANCE

- The roof box should be carefully cleaned and maintained, particularly in the winter months (see step 11).
- The locks should be lubricated with graphite or similar dry lubricant.
- Box should be protected from exposure to the elements during prolonged periods of storage.
- Box and fittings should be inspected periodically for damage.

GENERAL CLEANING

- Clean with mild soap and lukewarm water.
- Use a soft damp cloth or chamois. Wipe surface gently.
- Dry by blotting with damp cloth or chamois.
- Recommended cleaners:
 - Mr. Clean
 - Joy Detergent
 - Windex (ammonia or vinegar)
 - Fantastic - all purpose
 - 409 - all purpose

TO RESTORE ORIGINAL LUSTER:

- Recommended spray polish & waxes:
 - Simonize Professional "One Step Instant Polish"
 - Turtle Wax Platinum Series "Ultra Gloss Detailer"
 - Meguiar's "NXT Generation Spray Wax"
- Use as instructed by the manufacturer.

TO REMOVE MINOR SCRATCHES

- Recommended scratch removers:
 - Novus plastic polish
 - No. 2 - Fine scratch removerUse as instructed by the manufacturer.
- AVOID: wiping with cloths that may contain grit or abrasives.
- AVOID: using powdered cleaners.
- AVOID: using cleaning solutions, polishes or waxes which contain petroleum distillates or strong solvents.

NOTE: Any product not recommended should be tested on a small inconspicuous area first. Wash off immediately if surface starts to soften or degrade in any manner.