



# SPYDER

## INSTALLATION GUIDE: ALT-YD-MBZC11-LED-(ALL COLORS)

### Tools Required

8mm Socket + Ratchet  
Panel Popper



*\*Please Note\**

If you are unfamiliar with the installation processes,  
professional installation is highly recommended.



1) Open the trunk.



2) Unlock and open the tail light access panel.



3) Use a panel popper to remove the retaining stake, then remove the grocery hook.



4) Peel back the trunk liner, then remove [4x] 8mm nuts that secure the tail light to the body.




5) Disconnect the tail light wiring harness.



6) Unseat the OEM tail light.



7) Take a look at the backside of the OEM tail light. Squeeze the tabs release and remove the bulb plate. Never touch exposed bulbs with bare hands.

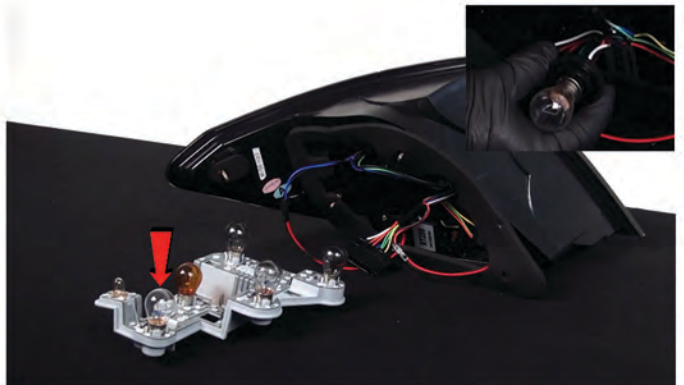

8) Remove the reverse bulb from the bulb plate. Transfer the bulb to the black and white wire reverse lamp socket of the Spyder tail light. Reinstall the socket.



9) Be sure the gasket is properly mounted. Your Spyder tail light is now ready to install.



10) Connect the Spyder headlight to the wiring harness.





11) Seat the Spyder tail light.



12) Reinstall [4x] 8mm bolts to mount the tail light.



13) Replace the trunk liner, then reinstall the grocery hook and its retaining stake.



14) Reinstall the access panel, then lock the panel.



15) Close the trunk and enjoy your new Spyder LED tail lights.