
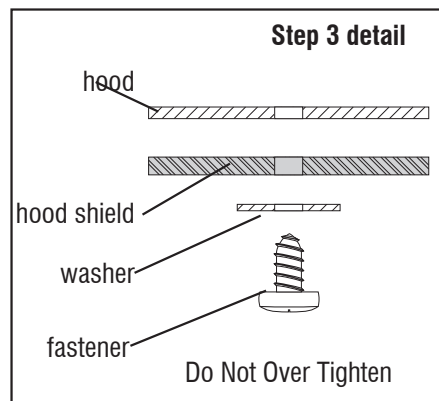


1. Raise hood.
2. Align hood shield with holes in hood.
3. Attach hood shield to hood using (4) washers and fasteners. (See detail below.)
4. Close hood.
5. Install (4) bumpons on painted hood/fender surface.

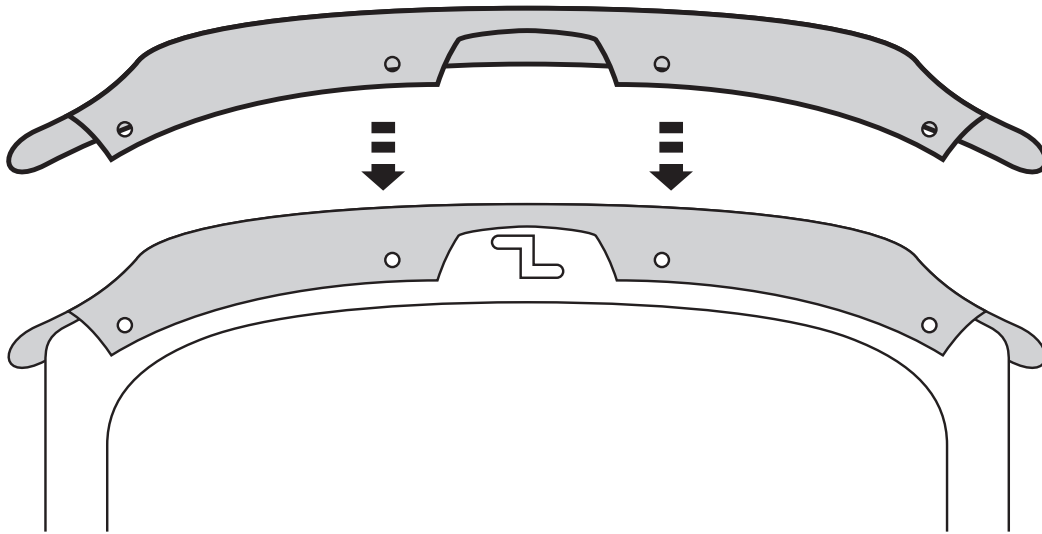

**IMPORTANT:** Before driving, ensure the hood shield is properly secured to vehicle. Clean with a **SOFT** cloth and soap and water **ONLY!** Using abrasive cleaners, chemicals, or solvents will **VOID** the warranty on this product.