
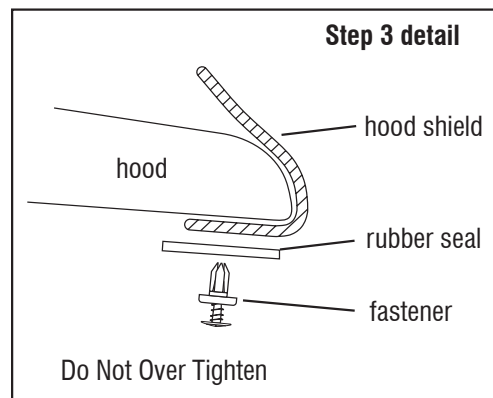


1. Open hood. Locate (4) fasteners that attach the rubber seal to the underside of the hood. Remove and discard.
2. Position the hood shield with the tabs sliding **between** the hood and rubber seal. Align holes.
3. Insert (1) fastener and screw until snug. Repeat for remaining (3) fasteners. (See detail below.)
4. Install bump ons at pre-cleaned locations on the painted hood/fender surface.

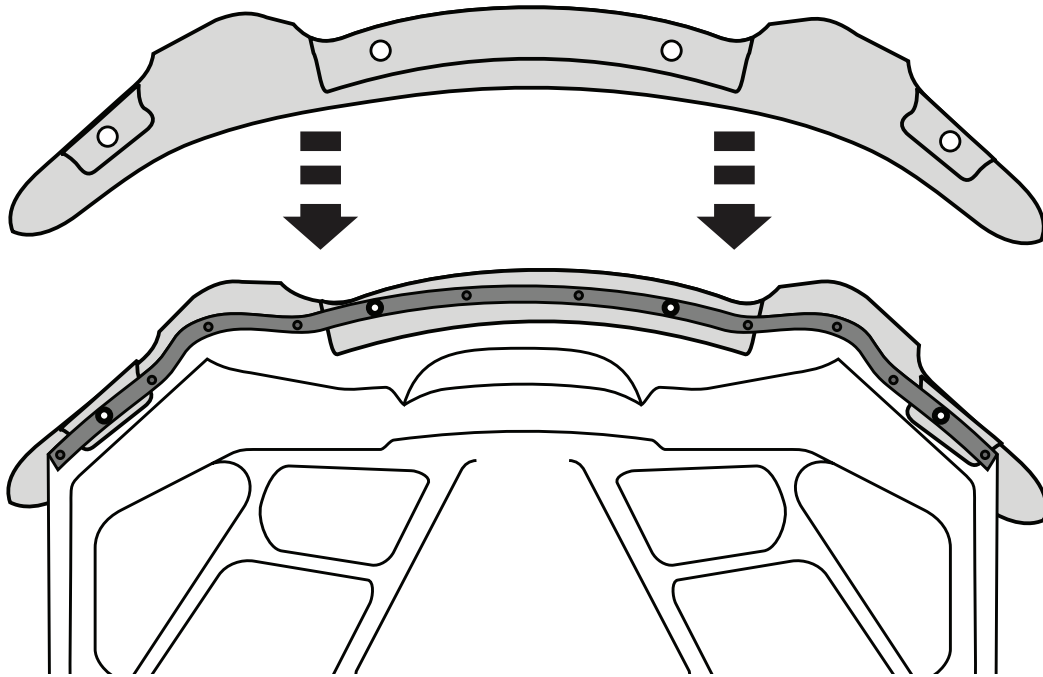

IMPORTANT: Before driving, ensure the hood shield is properly secured to vehicle. Clean with a **SOFT** cloth and soap and water **ONLY!** Using abrasive cleaners, chemicals, or solvents will **VOID** the warranty on this product.